


# ROLINE Thunderbolt™ 5 Cable, C-C, M/M, 8K UHD-2, 80Gbit/s, 240W, passive, black, 0.8 m

<b>Product No.</b>	11.02.9111
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	11.02.9111
<b>EAN (single piece)</b>	7630049634923

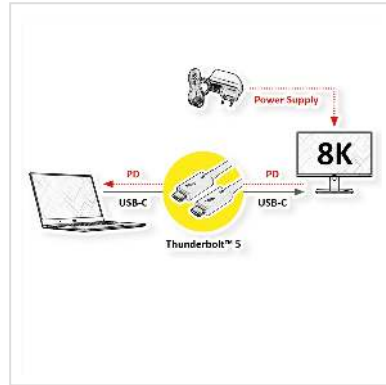

**Thunderbolt™ 5 cables use the USB Type C connector and provide a data transfer rate of up to 80 Gbit/s (bidirectional) and even 120 Gbit/s (asymmetrical) with the “Bandwidth Boost” as well as a charging speed of up to 240W! Thunderbolt™ 5 enables the use of two 8K monitors at 60Hz or three 4K monitors at 144 Hz.**

- Thunderbolt™ 5 enables a maximum data transfer rate of up to 80 Gbit/s (bidirectional) and up to 120 Gbit/s (asymmetrical)
- Enables the use of two 8K monitors at 60 Hz or three 4K monitors at 144 Hz
- Supports DP 2.1
- Thunderbolt™ 5 supports PD 3.1 (Power Delivery) up to 240W - to power your Macbook, Ultrabook or Notebook/Laptop
- Dynamic bandwidth adjustment - bandwidth is split between data and display transmission depending on requirements
- Cable in particularly high quality with improved shielding
- With the reversible USB Type C connector at both ends
- Colour: black

Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries.

## Technical specifications

Manufacturer	ROLINE
Product group	Cable

Product type	Thunderbolt™ 5 Cable
Colour	black
Length	0.8 m
Transfer quality	Thunderbolt™ 5 - 80 Gbit/s
Connection ports	USB Type C (USB-C) Male / USB Type C (USB-C) Male
Side 1 Connector Type	USB Type C (USB-C)
Side 1 Connector Gender	Male
Side 2 Connector Type	USB Type C (USB-C)
Side 2 Connector Gender	Male
Colour (Cable)	black
Max. resolution	7680 x 4320 @120Hz (8K, UHD-2)
Maximum data transfer rate	80 Gbit/s
Area of application	External
Supported charging technology	USB-PD - USB Power Delivery
Power (max.)	240 W
Cable shielding	Screened
Weight	36.1 g
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	100 mm
Depth of packaging (single piece)	100 mm
Package weight (single piece)	0.05 kg