



RoHS Compliant

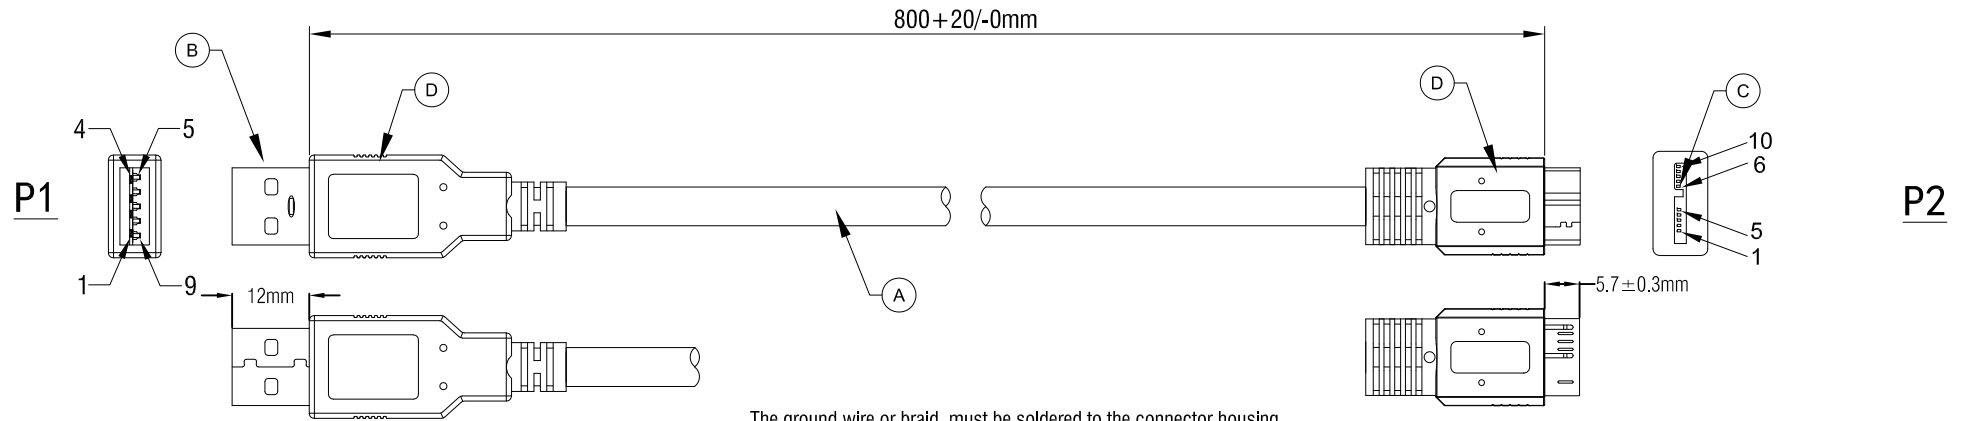

The ground wire or braid must be soldered to the connector housing

WIRE ADDRESS

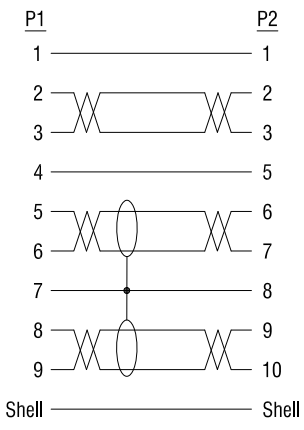

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:3Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.SUPPORT USB 3.2 GEN1 5Gbps

| | | | | | |
|--------|--|----------|------|--|---|
| D | 45P PVC BLACK | | G | ROLINE 3.2 Gen 1 Cable, A - Micro A, M/M, black, 0.8 m | |
| C | USB Micro A MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U*) | 1 | PCS | Item | 11.02.8872 |
| B | USB A MALE(Blue Insulator, Blue Insulator, Shell Nickel Plated,Pin Gold Plated 30U*) | 1 | PCS | Draw | Sam Date: 2014.11.28 |
| A | UL2725 OR UL20276 (28AWG*1P+ADM)*2C+28AWG*1P+24AWG*2C+ADB,OD=5.5mm, BLACK PVC JACKET.(BC Wire) | 1 | PCS | Approval | |
| NUMBER | PRODUCT SPECIFICATIONS | Quantity | Unit | Duty | F16 BOM.NO:13484 |
| 1 | 2 | 4 | | Sample NO. | Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4 |

