



RoHS Compliant

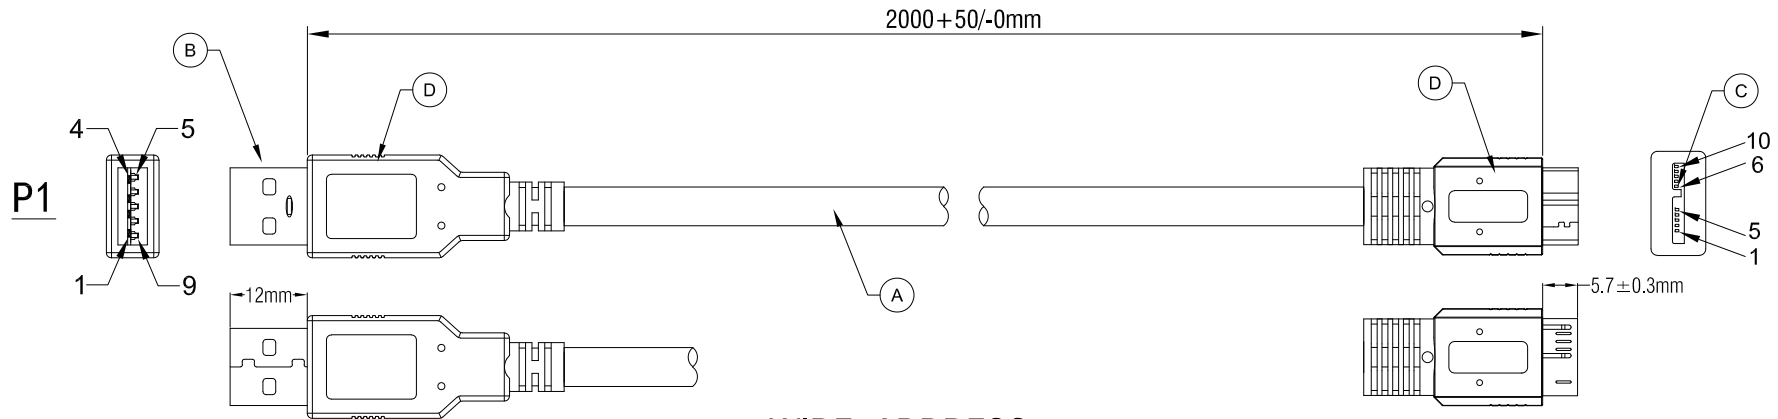

WIRE ADDRESS

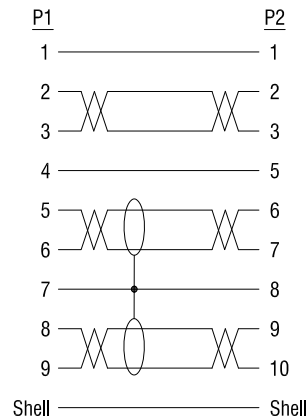

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.

D	45P PVC BLACK		G	ROLINE USB 3.0 Cable, USB Type A M - Micro USB Type A M, 2m		
C	USB 3.0 Micro A MALE(Black Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Item	11.02.8874	
B	USB 3.0 A MALE(Blue Insulator, Shell Nickel Plated,Pin Gold Plated 30U")	1	PCS	Draw	Sam	Date: 2014.11.28
A	UL2725 OR UL20276 (28AWG*1P+EAM)*2C+28AWG*1P+24AWG*2C+AEB,OD=5.5mm, BLACK PVC JACKET,(BC Wire)	1	PCS	Approval		
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit	Duty	F16	BOM.NO:13486
				Sample NO.		
				Drawings of 1 (2)	Proportion: 1:1	Unit(mm)
				A4		

SECOMP