


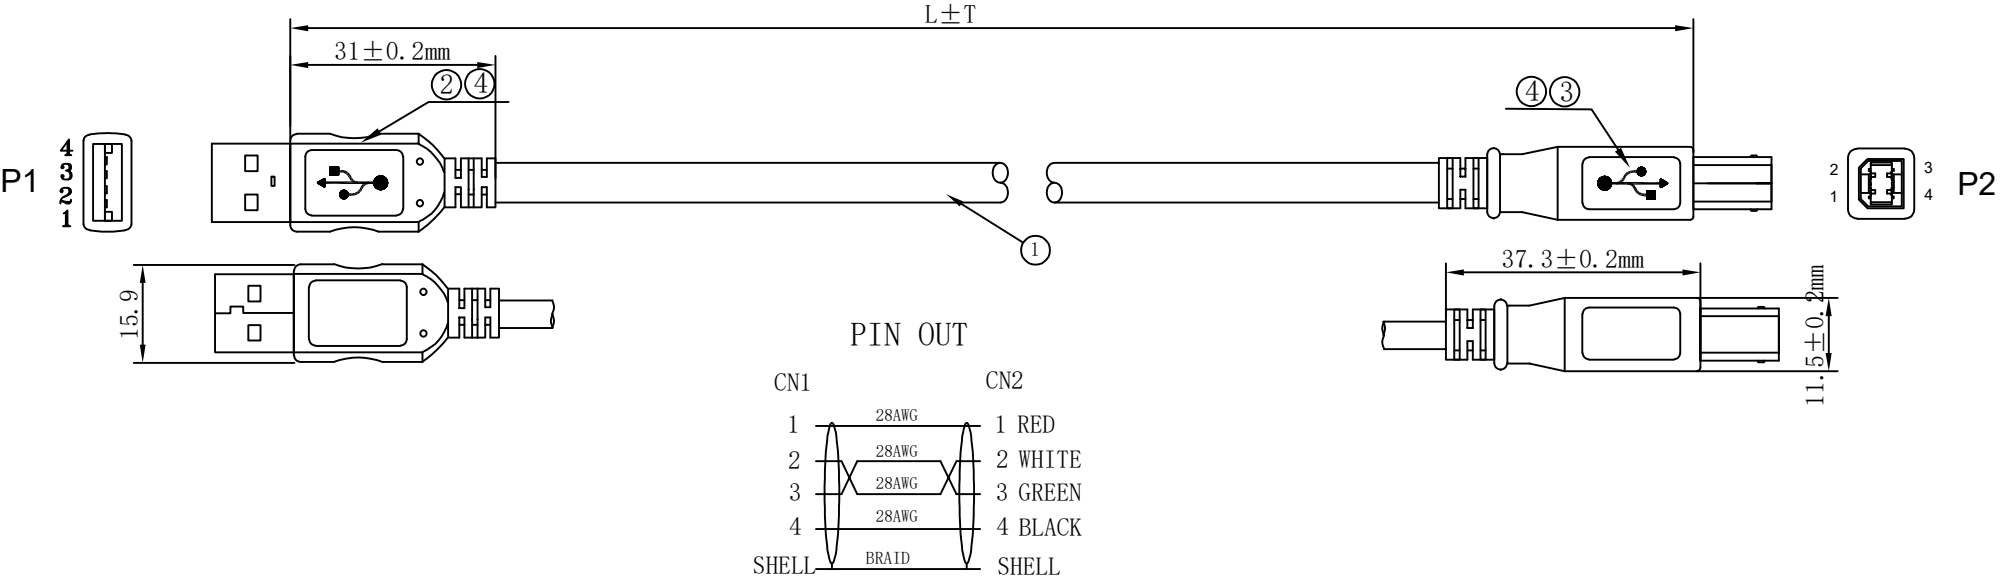

- NOTE:
- Electrical test:
 - (1).100% open short & miss wire test;
 - (2).Insulation resistance:DC 300V 10M Ω ;
 - (3).Contactor resistance:3 Ω Max;
 - (4).Dielectric strength:100V AC/Minute,1mA.
 - RoHS and Reach Compliant
 - PRINTING:USB 2.0 CABLE, 28AWG $\times$ 1P+28AWG $\times$ 2C RECYCLED
 - The proportion for the recycled material is more than 50%.

MATERIAL LIST:

④	OUTER MOLD	RECYCLED PVC COLOR: BLACK	2	
③	USB B TYPE	USB B /M TYPE,THE PIN GOLD PLATING , THE SHELL FOR NICKEL PLATING	1	
②	USB A TYPE	USB A /M TYPE,THE PIN GOLD PLATING , THE SHELL FOR NICKEL PLATING	1	
①	CABLE	USB 2.0 28AWG (BC*1P)+28AWG (BC*2C)+AB AL-MG JACKET:RECYCLED PVC/black OD: 4.5 $\pm$ 0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2023/12/19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.8818	USB2.0 Cable, A - B, M/M, 1.8m	1800 $\pm$ 30
11.45.8808	USB2.0 Cable, A - B, M/M, 0.8m	800 $\pm$ 20
ITEM NO.	DESC.	LENGTH (mm)

SECOMP