


# ROLINE Fibre Optic Jumper Cable, Duplex, 50/125µm, OM4, LC/LC, LSOH, UNIBOOT, violet, 10 m

<b>Product No.</b>	21.15.8656
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	21.15.8656
<b>EAN (single piece)</b>	7630049634237

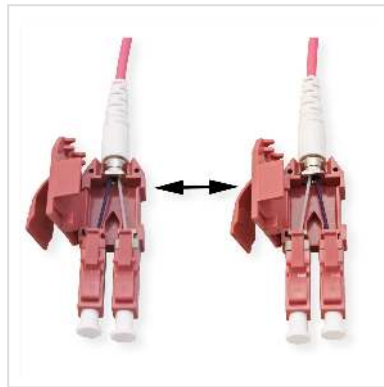

**LSOH**

**ROLINE Fiber Optic Uniboot LSOH Patch Cord LC/LC in OM4 quality for high-performance fiber optic cabling in excellent ROLINE quality. A uniboot patch cord is ideal for a high-density environment. Compared to the conventional duplex connector, the design is more compact and only one cable is used for two lines, which enables usage in a high-density environment. Changing the fiber polarity is easily possible without special tools.**

- Fiber Optic Duplex LC/LC Patch Cord with fiber type Multi-Mode 50/125µm, OM4
- Uniboot for high-density environments
- Fiber polarity can be changed easily without special tools
- Assembled with high-quality connectors with ceramic ferrule
- Material and clothing in ROLINE quality
- Cable sheathing is made of halogen-free, low smoke and flame-retardant material

## Technical specifications

Manufacturer	ROLINE
Product group	Fibre optic cable
Product type	Fibre Optic Jumper Cables OM4

Colour	violet
Length	10 m
Quantity of fibre	2
Cable type	Duplex Cable
External cable	no
Fibre section	Multi mode 50/125µm OM4
Connection ports	LC / LC
Side 1 Connector Type	LC
Side 2 Connector Type	LC
Bend radius	Static: 20 mm, Dynamic: 40 mm
Min. Bending radius, static	20 mm
Min. Bending radius, dynamic	40 mm
Colour (Cable)	violet
Crossed	yes
External cable diameter	2 mm
Mantle of external cable	LS0H
Cable LS0H	yes
Flame retardant according to IEC 60332-1-2	yes
Low smoke according to IEC 61034-2	yes
Halogen free according to IEC 60754-2	yes
Max. insertion loss	0.3 dB
Min. return loss	30 dB
Weight	67.5 g
Height of packaging (single piece)	10 mm

Width of packaging (single piece)	180 mm
--------------------------------------	--------

Depth of packaging (single piece)	180 mm
--------------------------------------	--------

Package weight (single piece)	0.1 kg
----------------------------------	--------