


ROLINE Fibre Optic Jumper Cable, Duplex, 9/125µm, OS2, LC/LC, LSOH, UNIBOOT, Slim, yellow, 7 m

| | |
|---------------------------|---------------|
| Product No. | 21.15.8645 |
| Manufacturer | ROLINE |
| Manufacturer No. | 21.15.8645 |
| EAN (single piece) | 7630049634138 |

roline
Designed for Professionals

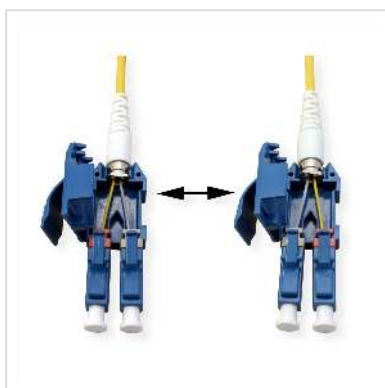

LSOH

ROLINE Fiber Optic Uniboot LSOH Patch Cord LC/LC in OS2 quality. A uniboot connector is ideal for a high-density environment. Compared to conventional duplex patch cords, the design is more compact and only one cable is used for two lines, which enables usage in a high-density environment. Changing the fiber polarity is easily possible without special tools.

- Fiber Optic Duplex LC/LC Patch Cord with fiber type Single-Mode 9/125µm, OS2
- Uniboot for high-density environments
- Fiber polarity can be changed easily without special tools
- Assembled with high-quality connectors with ceramic ferrule
- Material and clothing in ROLINE quality
- Cable sheathing is made of halogen-free, low smoke and flame-retardant material

Technical specifications

| | |
|---------------|-------------------------------|
| Manufacturer | ROLINE |
| Product group | Fibre optic cable |
| Product type | Fibre Optic Jumper Cables OS2 |
| Colour | yellow |

| | |
|--|-------------------------------|
| Length | 7 m |
| Quantity of fibre | 2 |
| Cable type | Duplex Cable |
| External cable | no |
| Fibre section | Single mode 9/125µm OS2 |
| Connection ports | LC / LC |
| Side 1 Connector Type | LC |
| Side 2 Connector Type | LC |
| Bend radius | Static: 20 mm, Dynamic: 40 mm |
| Min. Bending radius, static | 20 mm |
| Min. Bending radius, dynamic | 40 mm |
| Colour (Cable) | yellow |
| Crossed | yes |
| External cable diameter | 2 mm |
| Cable LSOH | yes |
| Flame retardant according to IEC 60332-1-2 | yes |
| Low smoke according to IEC 61034-2 | yes |
| Halogen free according to IEC 60754-2 | yes |
| Max. insertion loss | 0.3 dB |
| Min. return loss | 50 dB |
| Weight | 44.8 g |
| Height of packaging (single piece) | 10 mm |
| Width of packaging (single piece) | 150 mm |

| | |
|--------------------------------------|--------|
| Depth of packaging (single piece) | 150 mm |
|--------------------------------------|--------|

| | |
|----------------------------------|---------|
| Package weight (single piece) | 0.09 kg |
|----------------------------------|---------|