


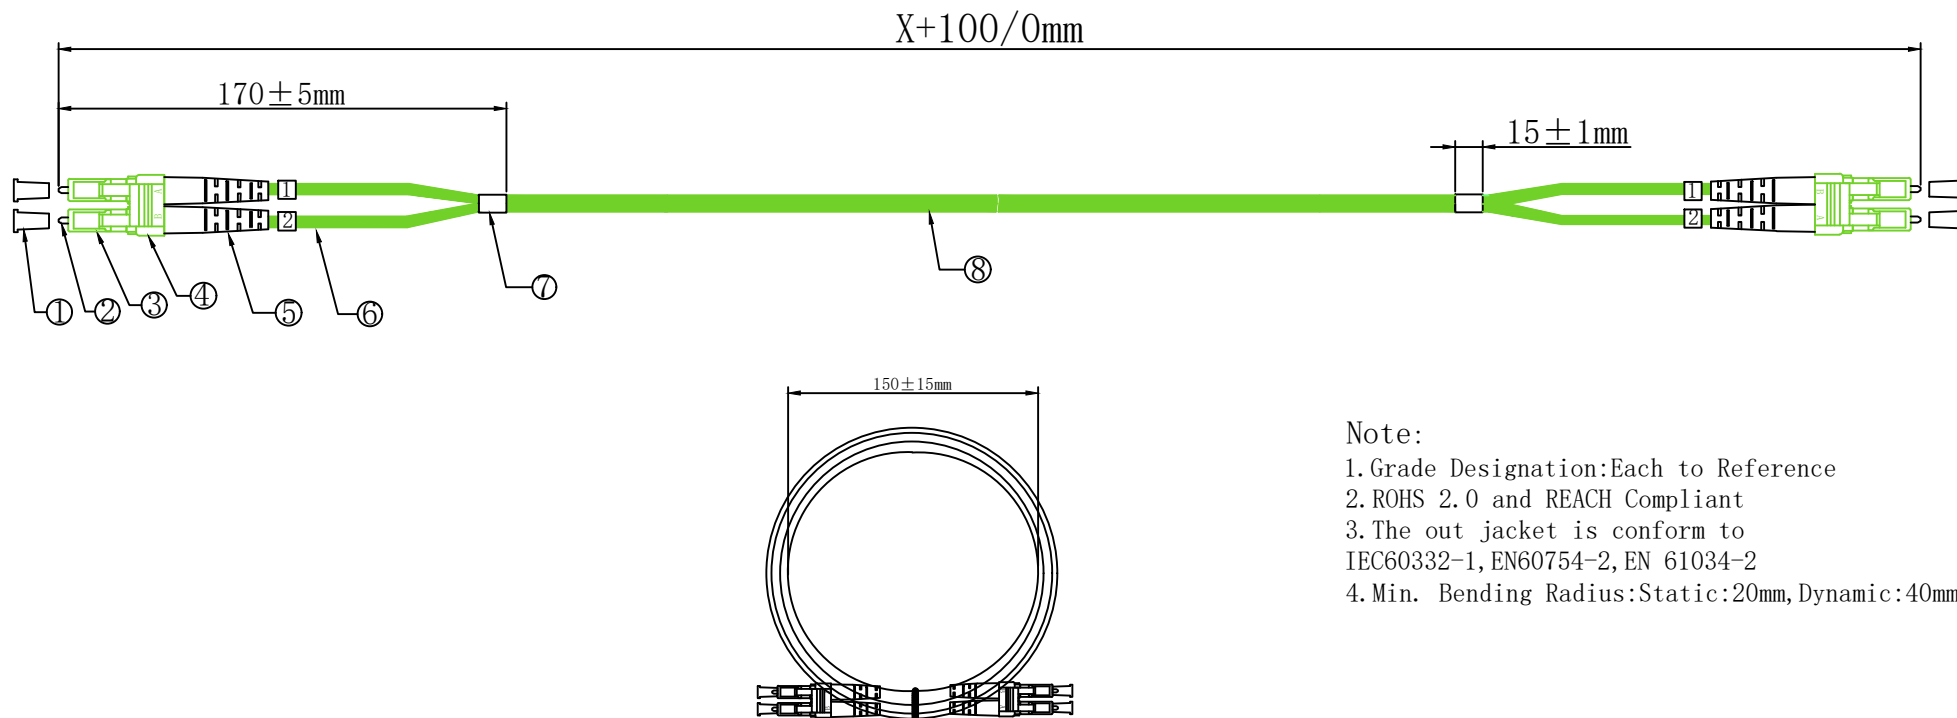

Note:

1. Grade Designation: Each to Reference
2. ROHS 2.0 and REACH Compliant
3. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
4. Min. Bending Radius: Static: 20mm, Dynamic: 40mm

MATERIAL LIST:

⑧	Fiber Optical Cable Duplex ϕ 2.0 OM5 50/125um LSZH Lime Green	L	
⑦	Black Heat shrink tubing	2	
⑥	Ring 1, 2	4	
⑤	LC 2.0 white Boot	4	
④	LC Duplex Clip Lime Green	2	
③	LC Duplex Connector Lime Green	4	
②	LC/UPC MM Ferrule	4	
①	LC White Dust cap	4	
NO	SPECIFICATION STANDARD	QT'Y	REMARK

Type	Multi-Mode
Insertion Loss	$\leq 0.3\text{dB}$
Return Loss	$\geq 30\text{dB}$
Test Wavelength	850nm

ITEM NO.	DESC.
21.15.9275	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 10m
21.15.9276	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 7m
21.15.9274	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 5m
21.15.9273	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 3m
21.15.9272	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 2m
21.15.9271	ROLINE FO Jumper Cable, OM5, OD 2mm, LC/LC, 1m

		Add Min. Bending Radius	2022-1-24	A1
		NEW	2021-07-09	A2
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP