


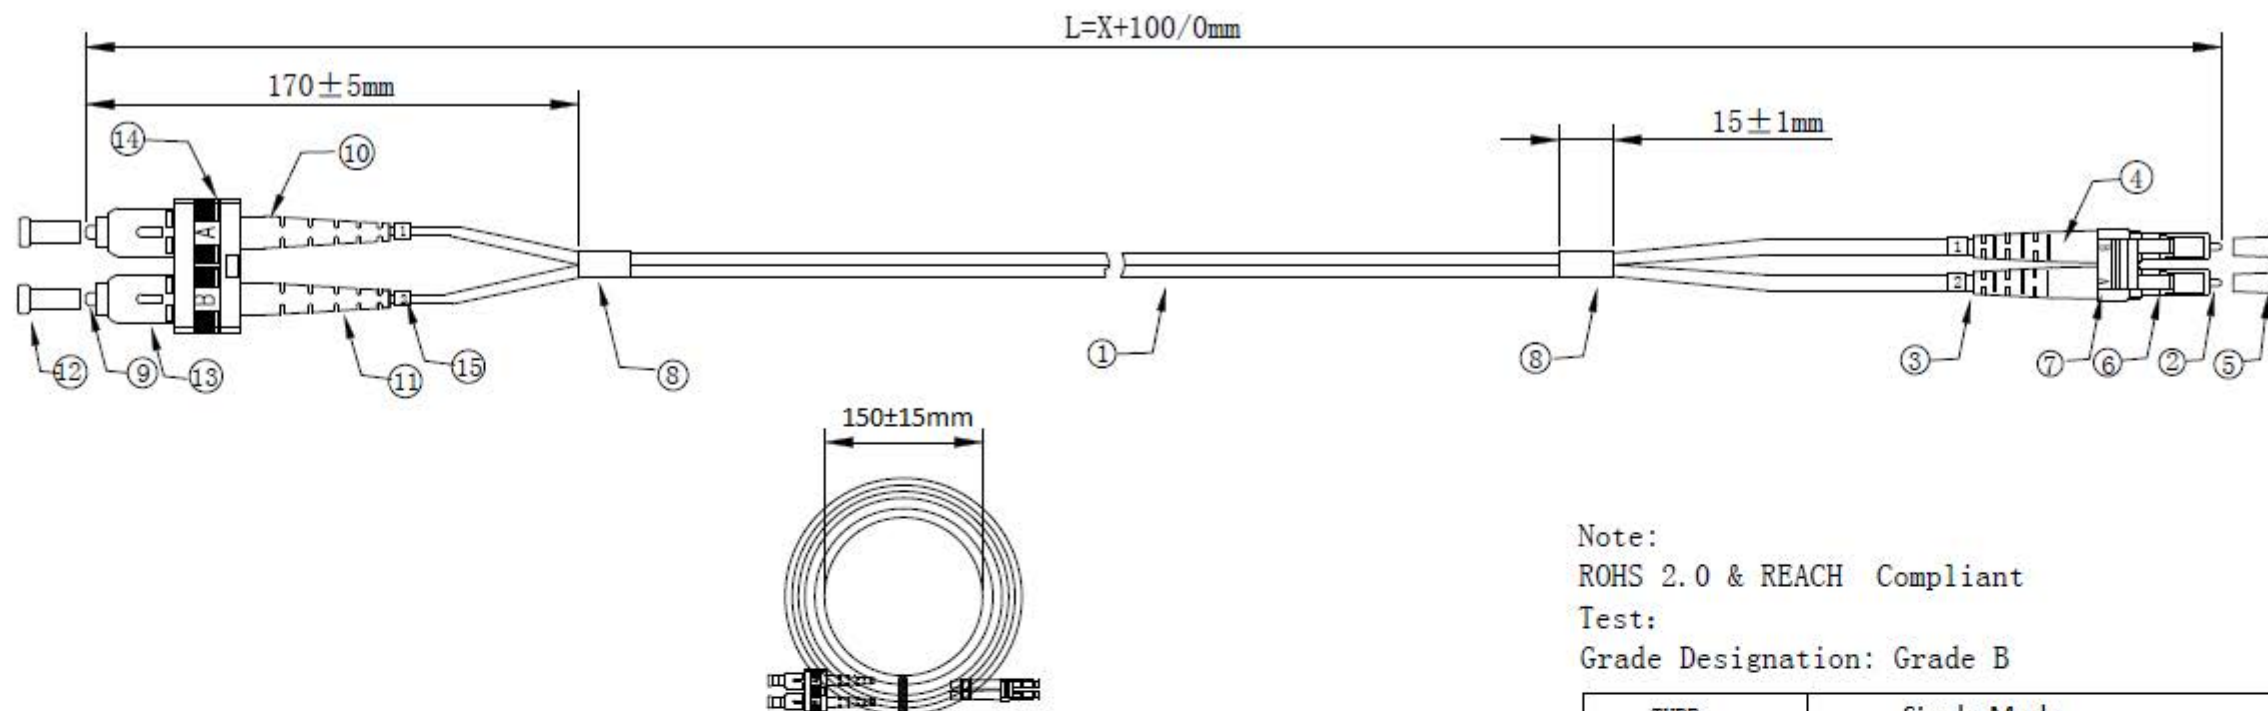

Note:
 ROHS 2.0 & REACH Compliant
 Test:
 Grade Designation: Grade B

TYPE	Single Mode
Insertion Loss	Average $\leq 0.12\text{dB}$ 97% $\leq 0.25\text{dB}$ (IEC 61300-3-34, Each to Each)
Return Loss	$> 50\text{dB}$ (IEC 61300-3-6, Each to Reference)
Test Wavelength	1310nm

Macro bending radius: 7.5mm

⑮	Ring 1、2	4pcs	
⑭	SC Clip Blue	1pcs	
⑬	SC Duplex Connector Blue	2pcs	
⑫	SC Dust Cap	2pcs	
⑪	SC Black 2.0 Boot	1pcs	
⑩	SC Red 2.0 Boot	1pcs	
⑨	SC/UPC Ferrule Ceramic	2pcs	
⑧	Black Heat Shrink Tube	2pcs	
⑦	LC Duplex Clip Blue	1pcs	
⑥	LC Duplex Connector Blue	2pcs	
⑤	LC Dust Cap White	2pcs	
④	LC 2.0 Boot White	1pcs	
③	LC 2.0 Boot White	1pcs	
②	LC/UPC SM Ferrule ceramic	2pcs	
①	Fiber Optical Cable Duplex SM G652.D 9/125 ϕ 2.0mm LSZH Yellow	L+0.1m	
NO.	SPECIFICATION STANDARD	QT'Y	REMARK

21.15.8794	ROLINE F0 Jumper Cable, 9/125 μ m OS2, LC-SC, Grade B, 5m
21.15.8793	ROLINE F0 Jumper Cable, 9/125 μ m OS2, LC-SC, Grade B, 3m
21.15.8792	ROLINE F0 Jumper Cable, 9/125 μ m OS2, LC-SC, Grade B, 2m
21.15.8791	ROLINE F0 Jumper Cable, 9/125 μ m OS2, LC-SC, Grade B, 1m
21.15.8790	ROLINE F0 Jumper Cable, 9/125 μ m OS2, LC-SC, Grade B, 0.5m
ITEM NO.	DESC.

		NEW	2019-8-26	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP