


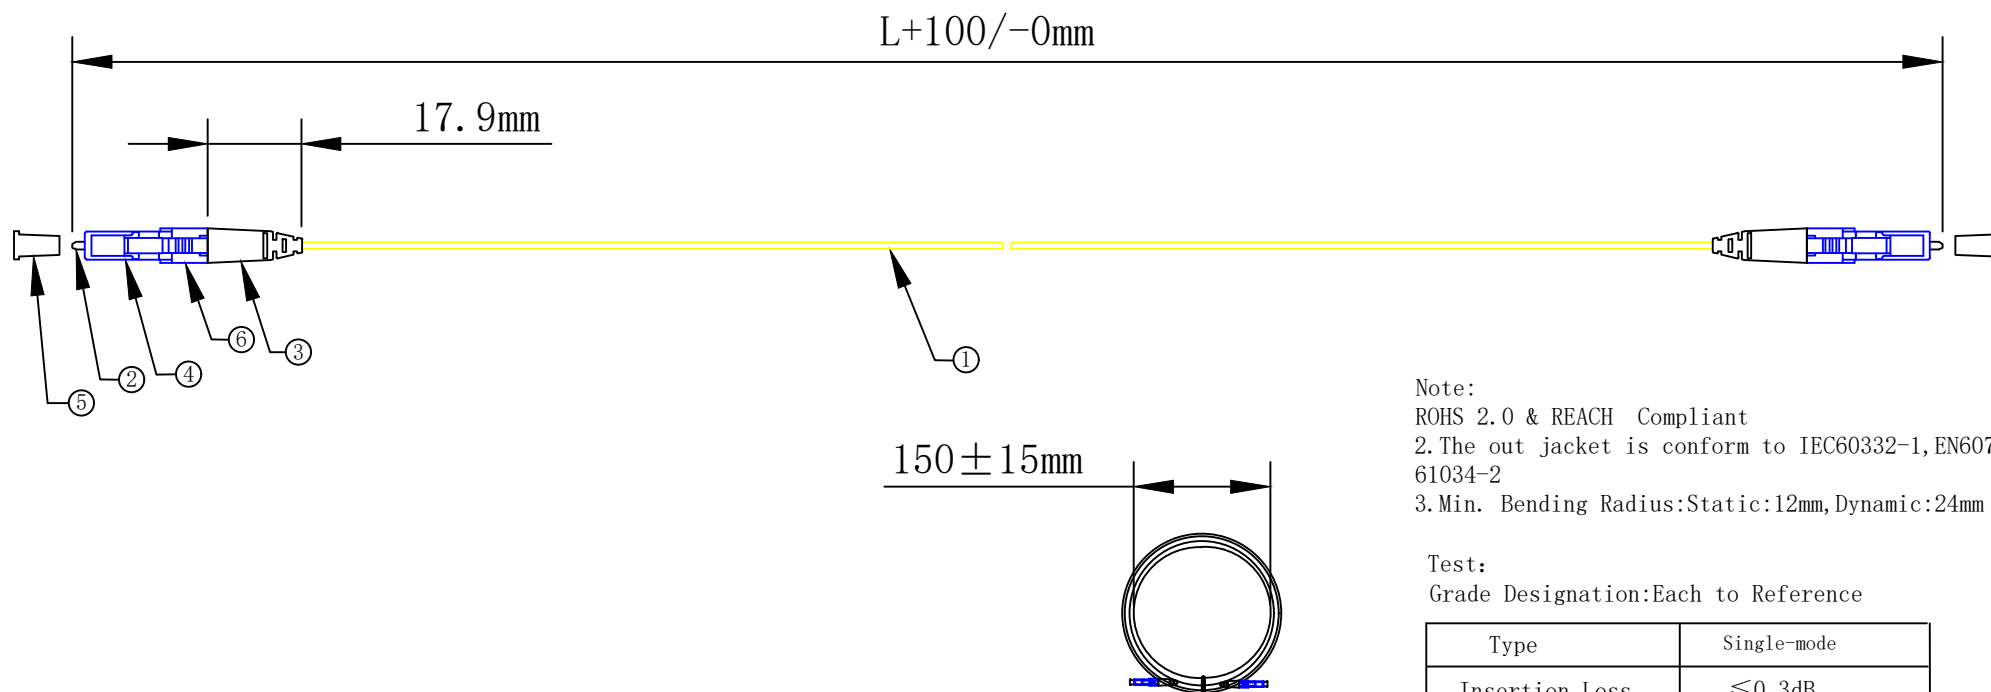

Note:
ROHS 2.0 & REACH Compliant
2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
3. Min. Bending Radius: Static: 12mm, Dynamic: 24mm

Test:
Grade Designation: Each to Reference

Type	Single-mode
Insertion Loss	≤0.3dB
Return Loss	≥50dB
Test Wavelength	1310nm

MATERIAL LIST:

				ITEM NO.	DESC.
⑥	LC Simplex Clip Blue	2pcs		21. 15. 8840	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 0.5m
⑤	LC Dust Cap White	2pcs		21. 15. 8841	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 1m
④	LC Simplex Connector Blue	2pcs		21. 15. 8842	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 2m
③	LC 1.2 white short boot	2pcs		21. 15. 8843	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 3m
②	LC/UPC SM Ceramic Ferrule	2pcs		21. 15. 8845	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 5m
①	Fiber Optical Cable yellow 9/125 G652.D OS2 Simplex Ø1.2mm LSZH	L+100		21. 15. 8846	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 7m
NO.	SPECIFICATION STANDARD	QT' Y	REMARK	21. 15. 8847	ROLINE F0 Jumper Cable OS2, Simplex, OD1.2mm, LC/LC, 10m

		Add Min. Bending Radius	2022-1-24	A1	SECOMP
		NEW	2017-11-24	A	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	