


UNITmm

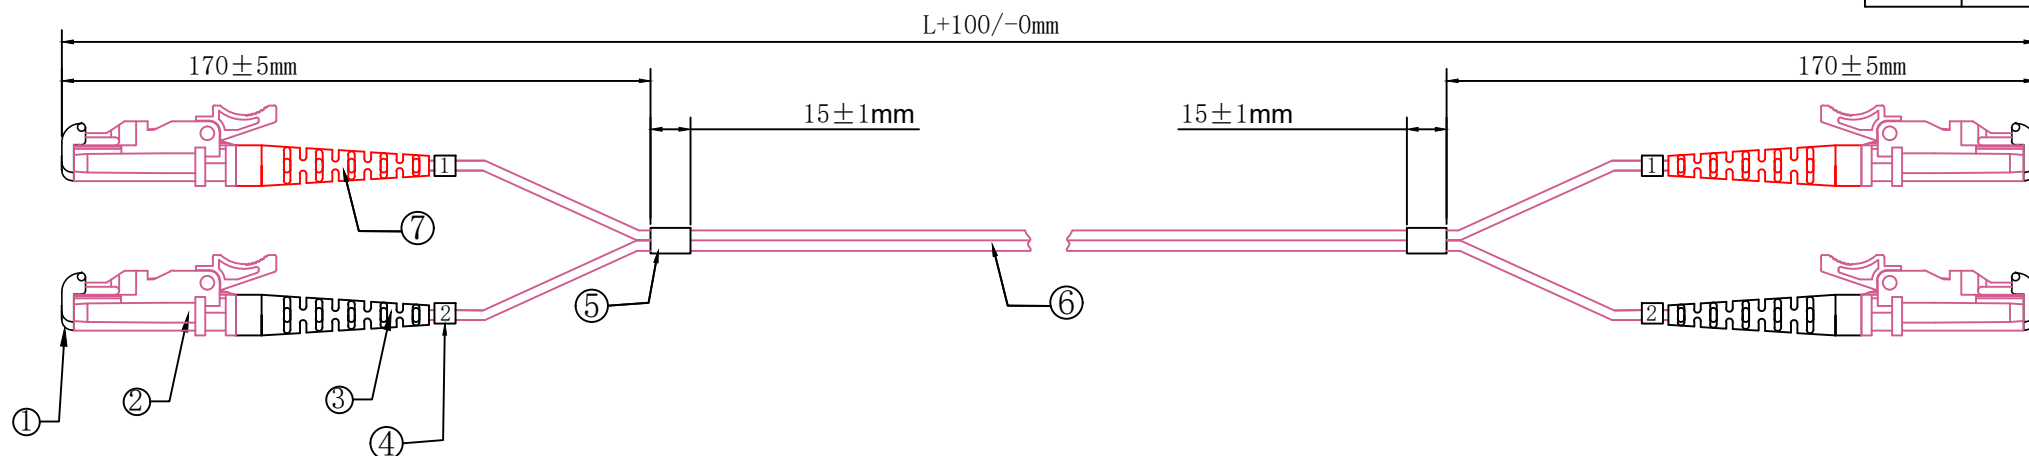


Note:

ROHS 2.0 & REACH Compliant

2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2

3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm



Test:

Grade Designation: Each to Reference

Type	Multi-Mode
Insertion Loss	≤0.2dB
Return Loss	≥30dB
Test Wavelength	850nm

MATERIAL LIST:

⑦	LSH 3.0 Boot Red	2pcs	
⑥	Fiber Optical Cable Erika violet RAL4003 OM4 50/125um Duplex Ø3.0*6.0mm LSZH	L	
⑤	Black Heat Shrink Tube	2pcs	
④	Ring 1、2	4pcs	
③	LSH 3.0 Boot Black	2pcs	
②	LSH Connector Erika violet	4pcs	
①	LSH Metal Dust Cap	2pcs	
NO.	SPECIFICATION STANDARD	QT'Y	REMARK

		Add Min. Bending Radius	2022-1-24	A1
		Connector colour: Beige → Erika violet	2020-05-13	A1
		NEW	2018-05-07	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	DESC.
21.15.9490	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 0.5m
21.15.9491	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 1m
21.15.9492	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 2m
21.15.9493	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 3m
21.15.9495	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 5m
21.15.9496	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 7.5m
21.15.9497	ROLINE FO Jumper Cable LSH-LSH Duplex, 50/125um, OM4, 10m

SECOMP