



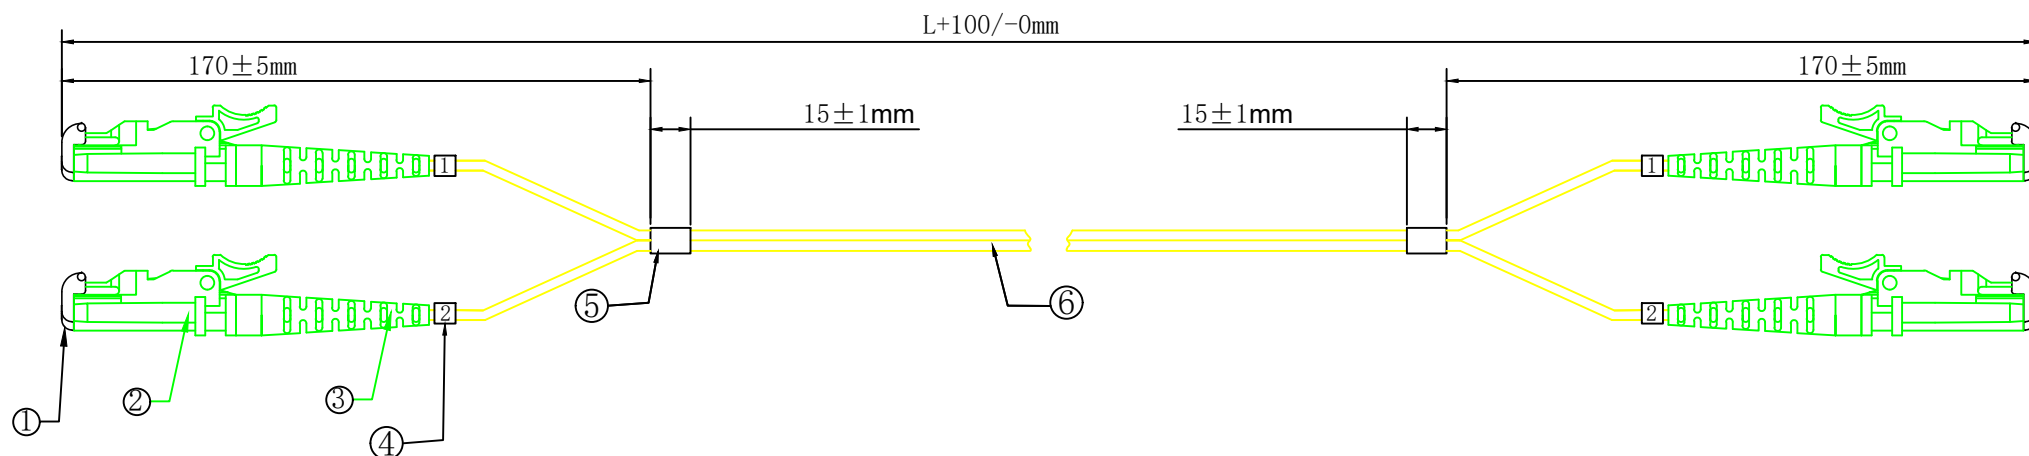

Note:
 ROHS 2.0 & REACH Compliant
 2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
 3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm



Test:
 Grade Designation: Each to Reference

Type	Single-Mode
Insertion Loss	≤0.2dB
Return Loss	≥60dB
Test Wavelength	1310nm

MATERIAL LIST:

NO.	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	Fiber Optical Cable Yellow OS2 G657.A2 9/125um Duplex ϕ 3.0*6.0mm LSZH	L	
⑤	Black Heat Shrink Tube	2pcs	
④	Ring 1、2	4pcs	
③	LSH 3.0 Boot Green	4pcs	
②	LSH Connector Green	4pcs	
①	LSH Metal Dust Cap	2pcs	
	ADD MIN. BENDING RADIUS	2022-1-24	A1
	NEW	2018-05-07	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE

ITEM NO.	DESC.
21.15.9500	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 0.5m
21.15.9501	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 1m
21.15.9502	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 2m
21.15.9503	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 3m
21.15.9505	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 5m
21.15.9506	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 7.5m
21.15.9507	ROLINE FO Jumper Cable LSH-LSH, APC, Duplex, 9/125um, OS2, 10m

SECOMP