


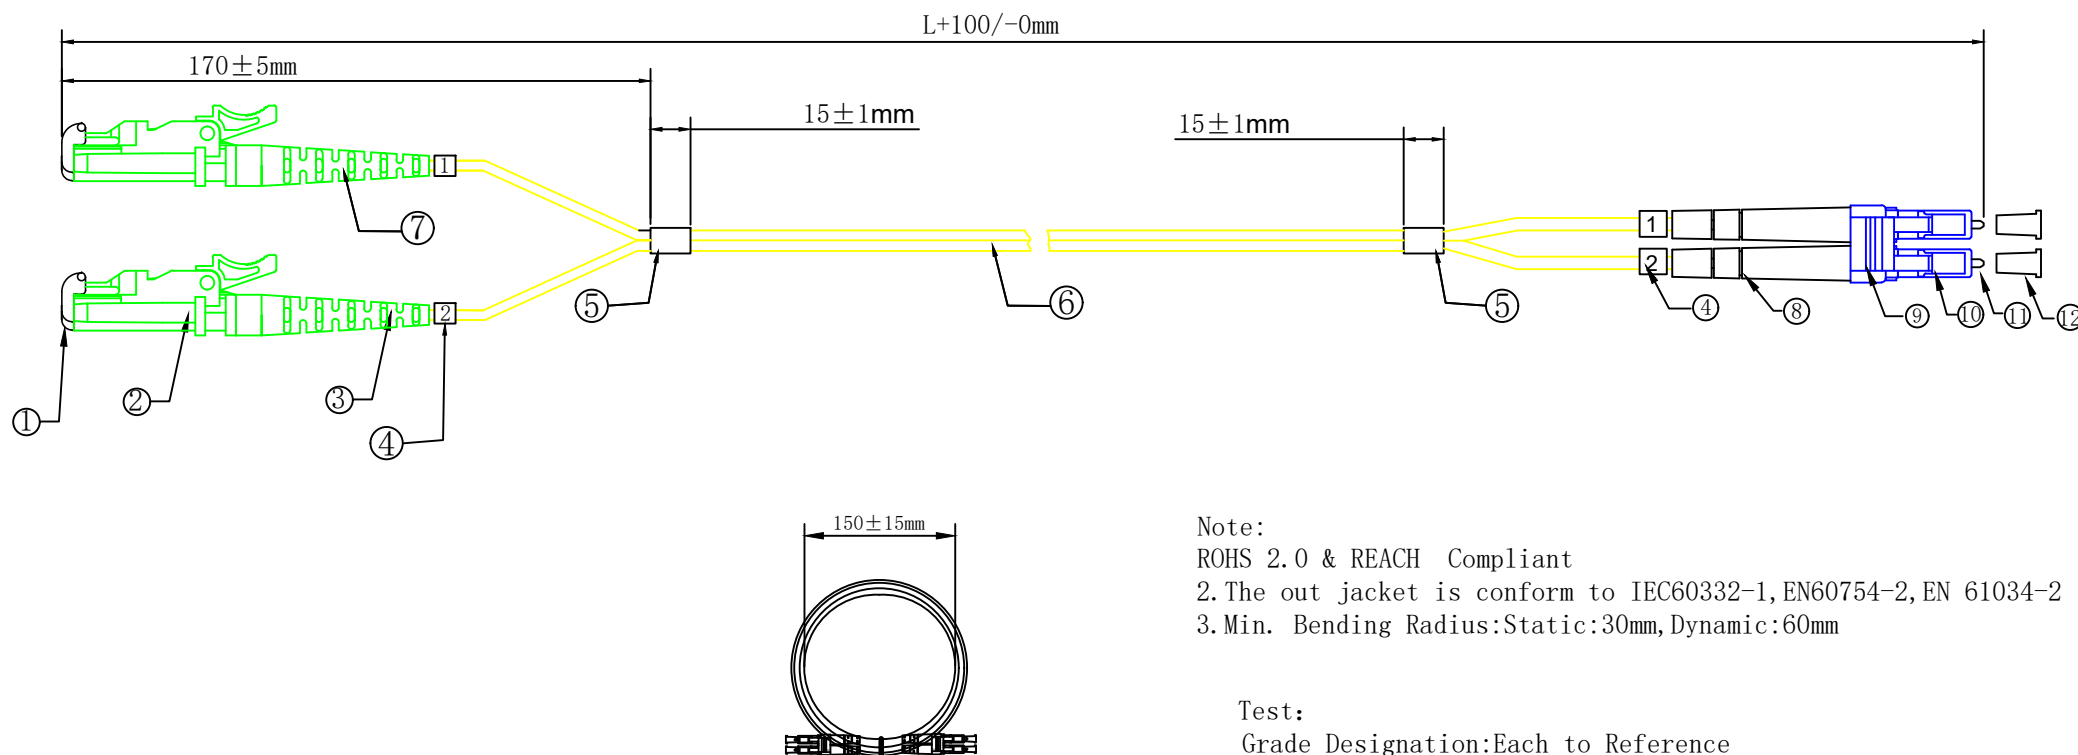

Note:
 ROHS 2.0 & REACH Compliant
 2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
 3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm

Test:
 Grade Designation: Each to Reference

MATERIAL LIST:

				Type	Single-Mode
⑫	LC Dust Cap White	2pcs		Insertion Loss	≤0.2dB
⑪	LC UPC SM Ceramic Ferrule	2pcs		Return Loss	UPC ≥ 50dB, APC ≥ 60dB
⑩	LC Blue Duplex Clip	1pcs		Test Wavelength	1310nm
⑨	LC Duplex Connector Blue	2pcs		ITEM NO.	DESC.
⑧	LC 3.0 Boot White	2pcs		21.15.9510	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 0.5m
⑦	LSH 3.0 Boot Green	2pcs		21.15.9511	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 1m
⑥	Fiber Optical Cable Yellow OS2 G657.A2 9/125um Duplex Ø3.0*6.0mm LSZH	L		21.15.9512	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 2m
⑤	Black Heat Shrink Tube	2pcs		21.15.9513	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 3m
④	Ring 1, 2	4pcs		21.15.9515	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 5m
③	LSH 3.0 Boot Green	2pcs		21.15.9516	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 7.5m
②	LSH Connector Green	2pcs		21.15.9517	ROLINE FO Jumper Cb1 LSH APC-LC UPC, Duplex, 9/125um, OS2, 10m
①	LSH Metal Dust Cap	2pcs			
NO.	SPECIFICATION STANDARD		QT'Y	REMARK	
		Add Min. Bending Radius	2022-1-24	A1	
		NEW	2018-05-07	A	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	

SECOMP