

# GNSS Active L1, L2, L5 Patch Antenna NM Direct Mount

GNSSL125DM26NM



### Features:

- 🔌 GNSS RHCP active antenna
- 🔌 Beidou, GPS, Glonass
- 🔌 LNA gain 30dB
- 🔌 Stacked L1 / L2 + L5 patch antenna
- 🔌 High rejection filters to suppress out of band interference
- 🔌 ESD Protected

### Applications:

- 🔌 Base station timing antenna
- 🔌 Tracking
- 🔌 Asset tracking, Fleet management, IoT, M2M

### Electrical Specifications @ 25° C

Antenna type	Nominal Impedance	Polarization	Radiation pattern
Patch	50Ω	RHCP	Directional
<b>Frequency (MHz)</b>	L1: 1561-1602	L2: 1215-1237	L5: 1164-1189
<b>Return Loss (dB)</b>	< -10	< -13	< -15
<b>Radiating Element Peak Gain (dBi)</b>	>2.5	>1.9	>1.9
<b>Avg. Efficiency (%)</b>	>40	>33	>39
<b>LNA Gain (dB) Typical</b>	28	33	30
<b>Noise Figure (dB)</b>	1.7 @1575MHz	2.2@1227MHz	2.2 @1164MHz
<b>Operating Voltage<sup>1</sup> (V)</b>	2.5 - 18		
<b>Power Consumption (mA)</b>	Max. 16		


### Mechanical Specifications

Dimension with stud (w/o cable)	Color	Antenna Material	Connector type	Installation torque	Weight
Ø50mm*55.35mm / Ø1.97"x2.18"	Gray	PC + Copper	N-Male	6.2 - 9.7 in-lbs. / 0.7 - 1.1 Nm	128 grams
Storage and operating Temperature	Ingress Protection	RoHS-Compliant	UV Protection	Flammability	
40°C to +85°C	IP67	Yes	UL f1	UL 94 V0	

### Notes:

1. LNA internal voltage stabilized by LDO (Low dropout regulator).

Mechanical Drawing

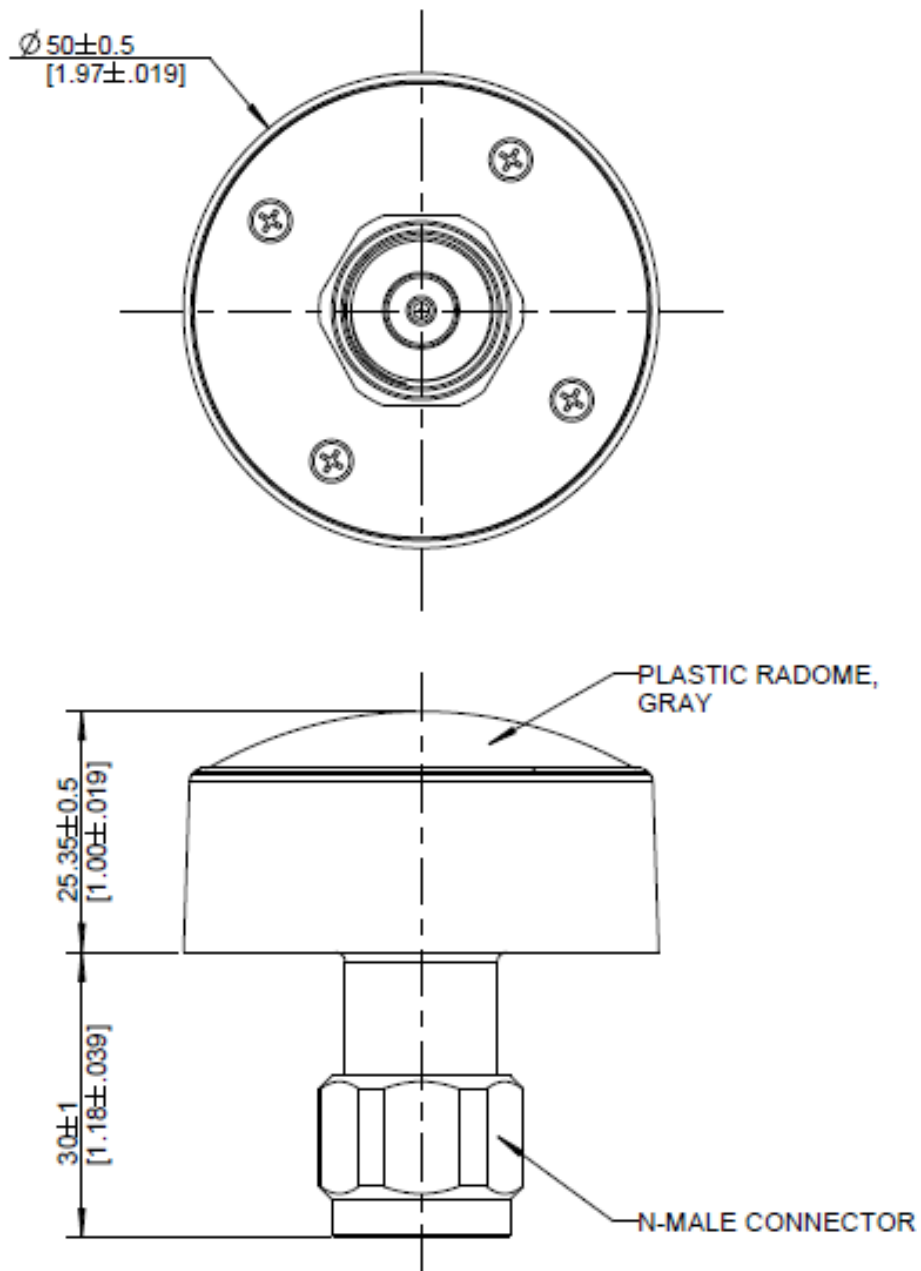


All dimensions are in mm / inches

### Testing Setup


Module is tested on dia. 120mm ground plane.




### Active Antenna Block Diagram

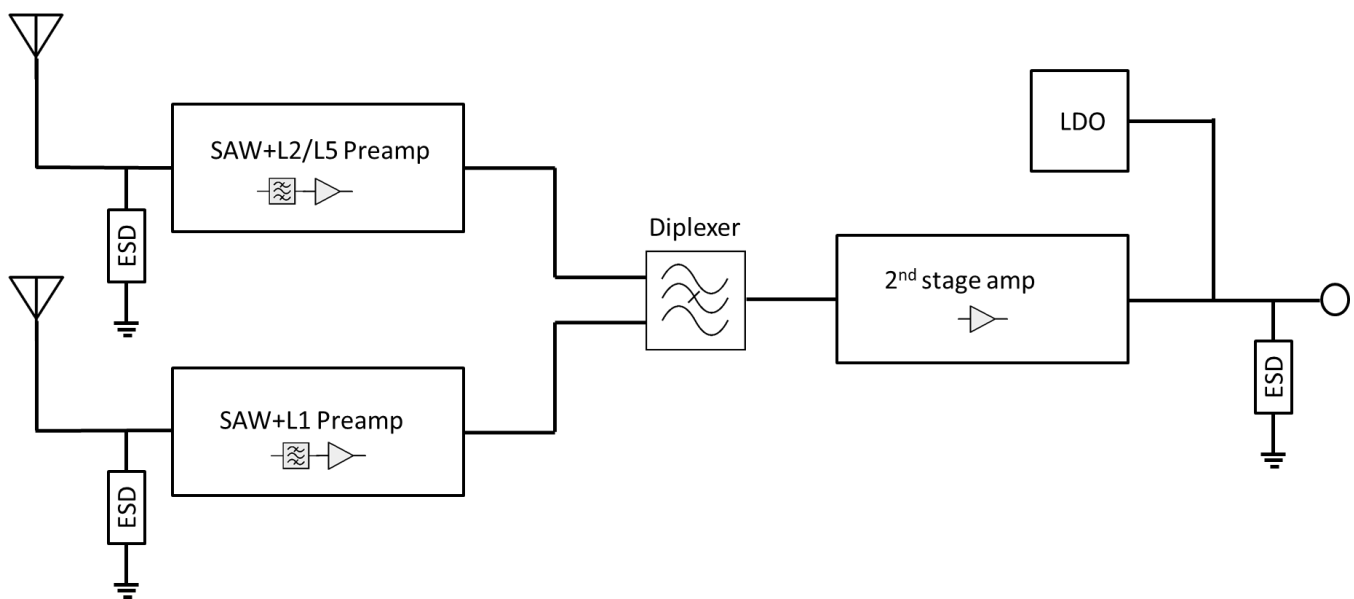





Return Loss

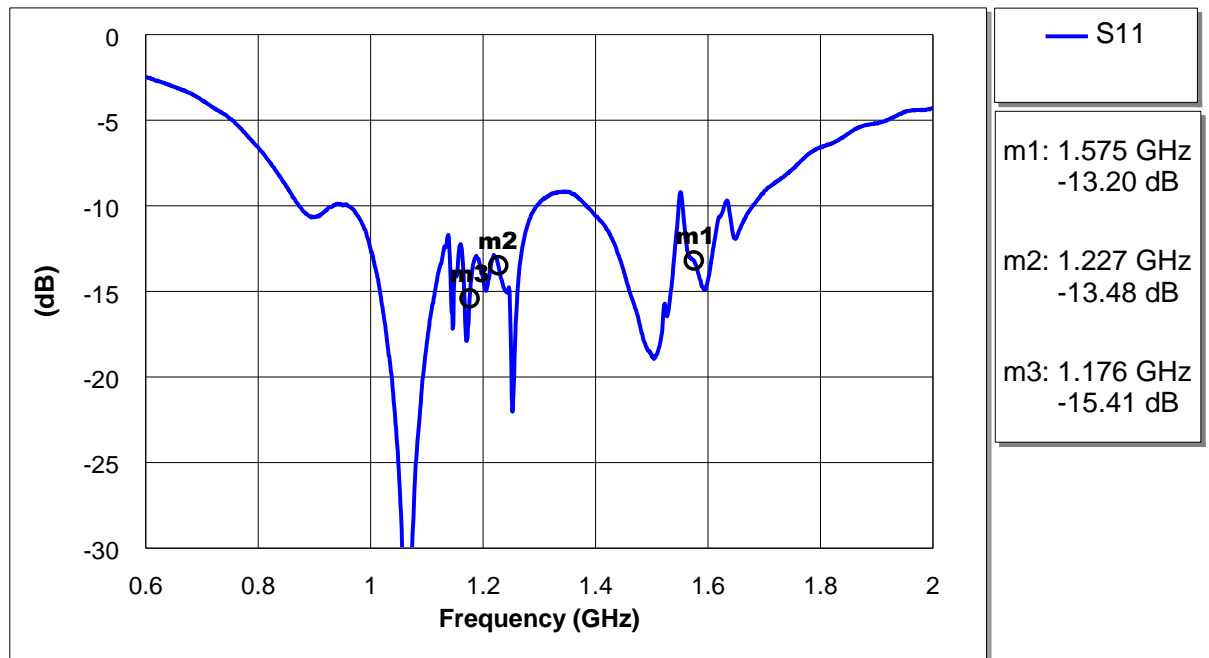


LNA Out of band rejection

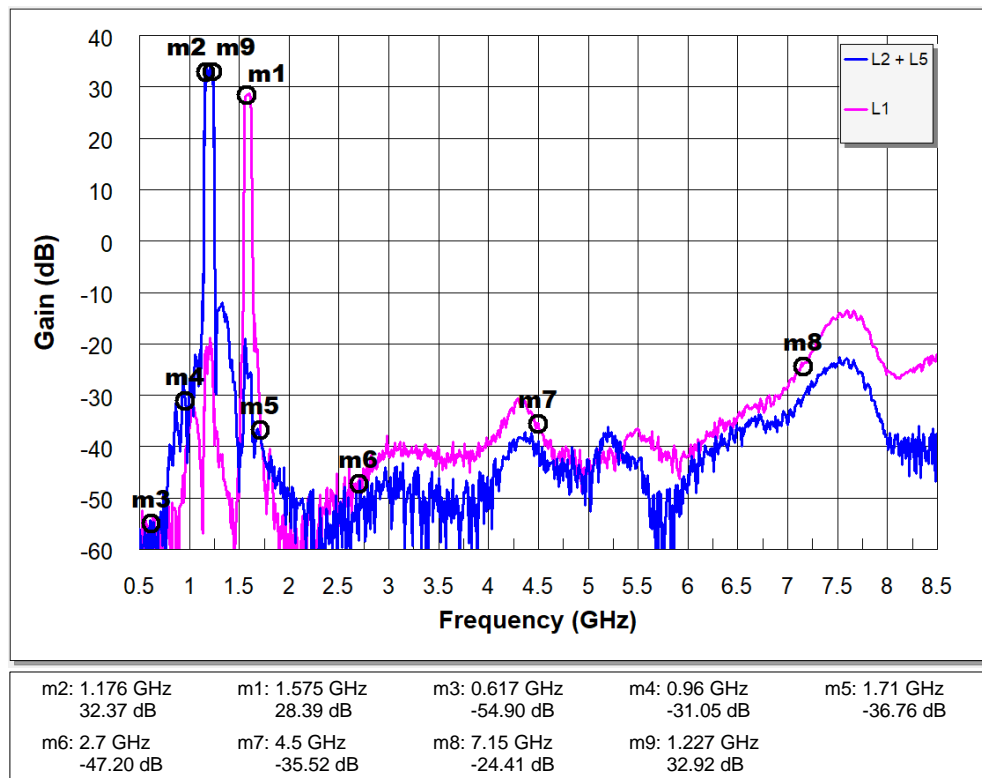


LNA Gain

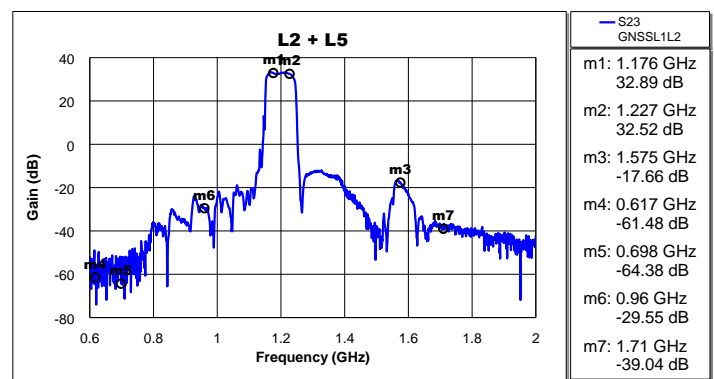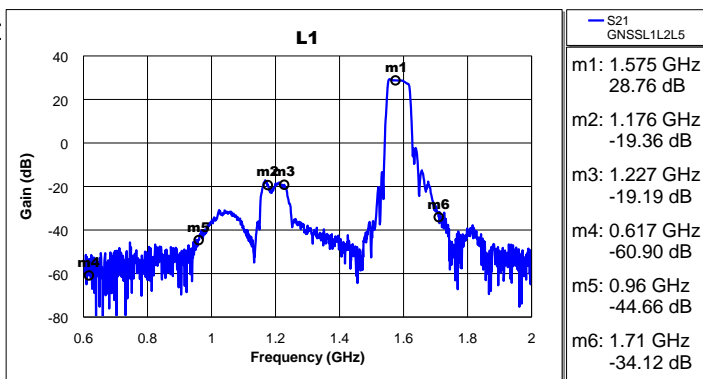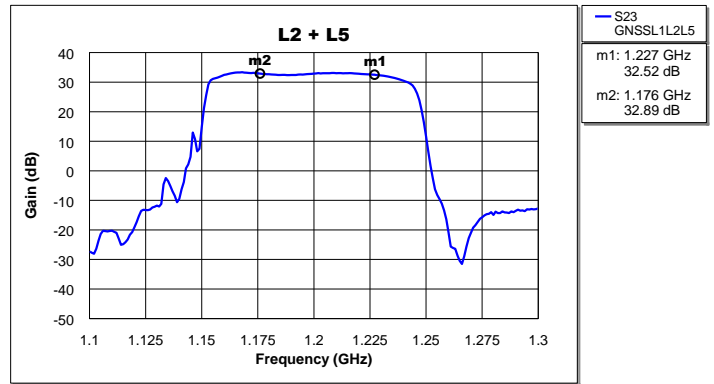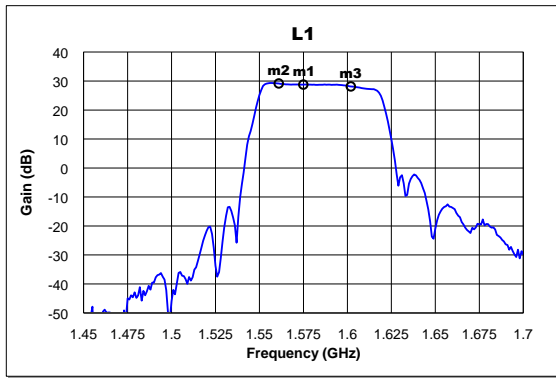

LNA Noise Figure

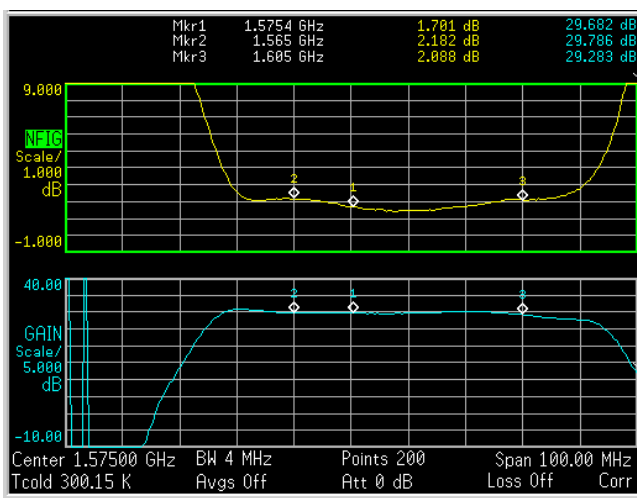


L1 Noise Figure

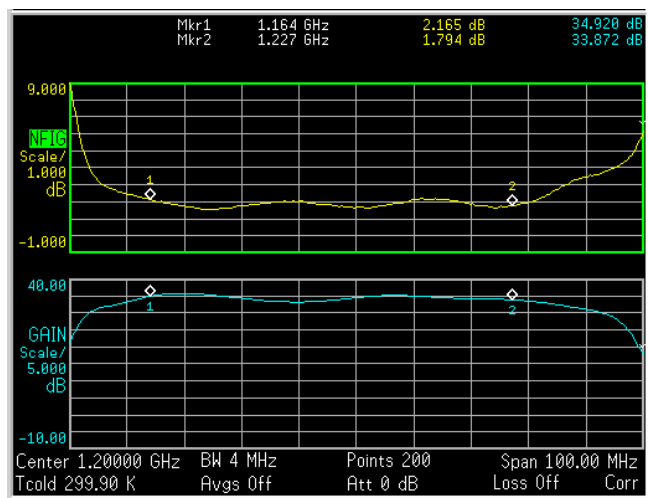


L2 + L5 Noise Figure

Radiating Element Efficiency

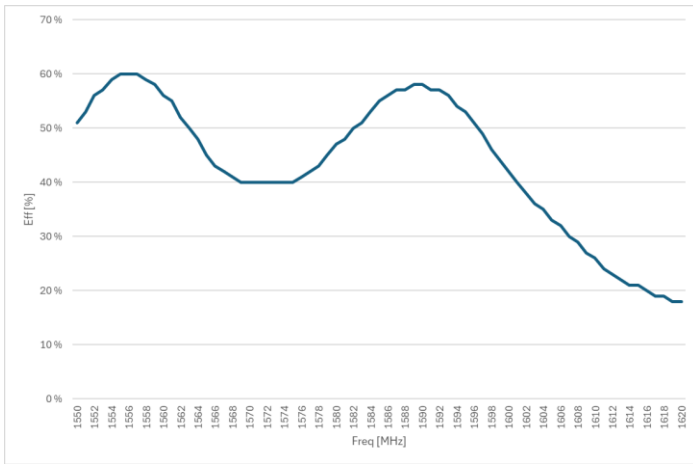


L1 Band

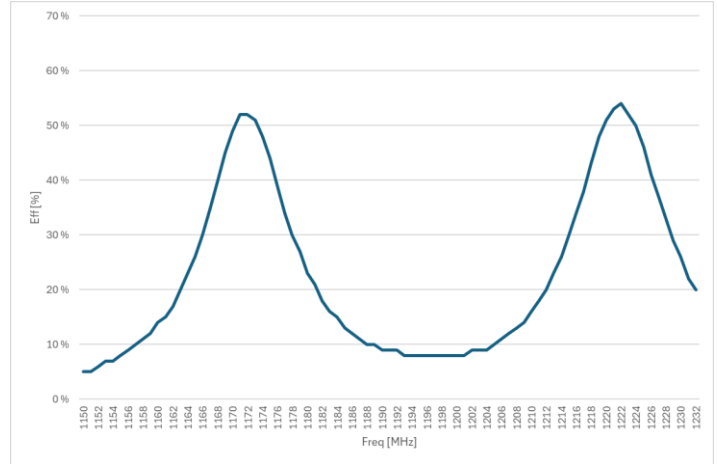


L2 + L5 Band

Radiating Element Peak Gain (Linear)

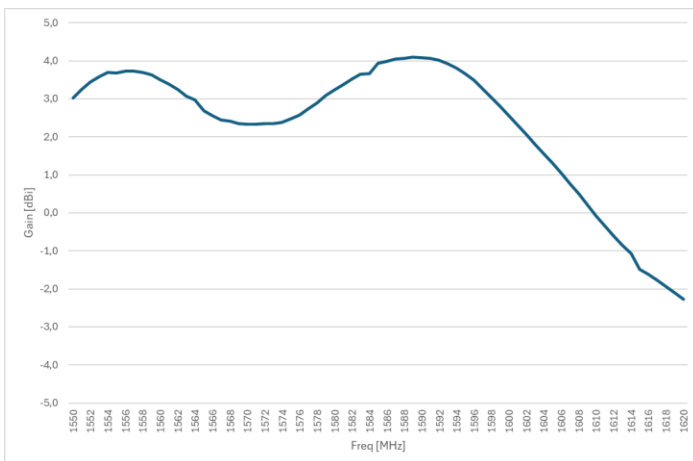


L1 Band

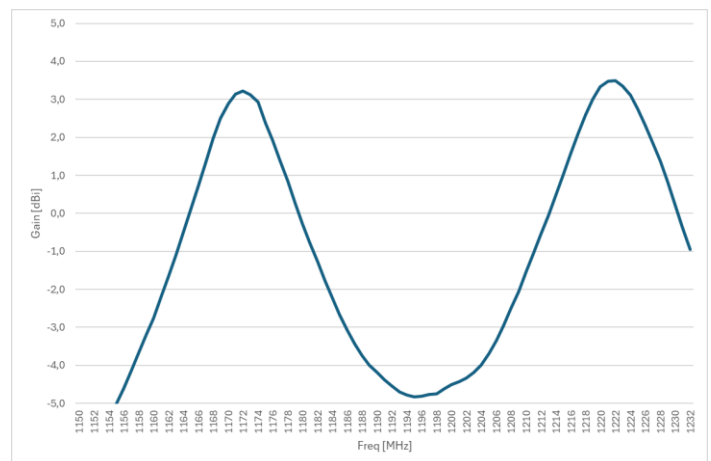


L2 + L5 Band


Radiation Patterns

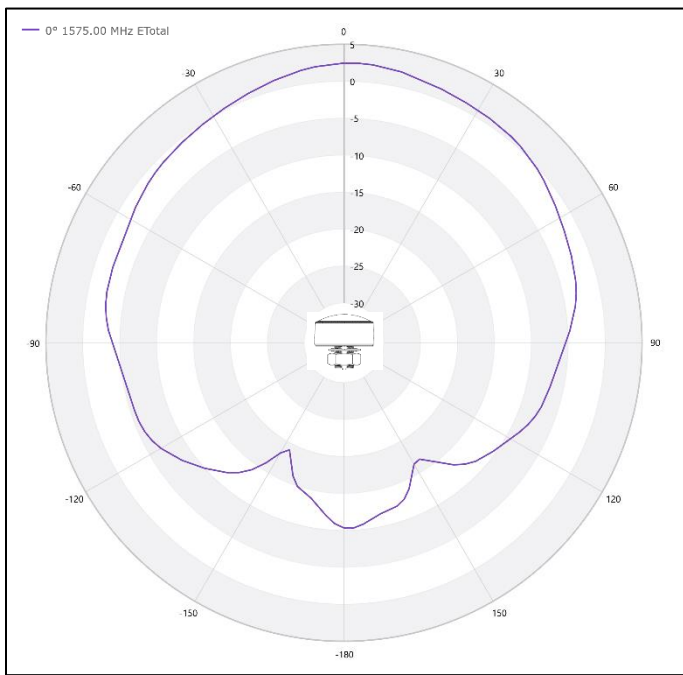


L1 Pattern

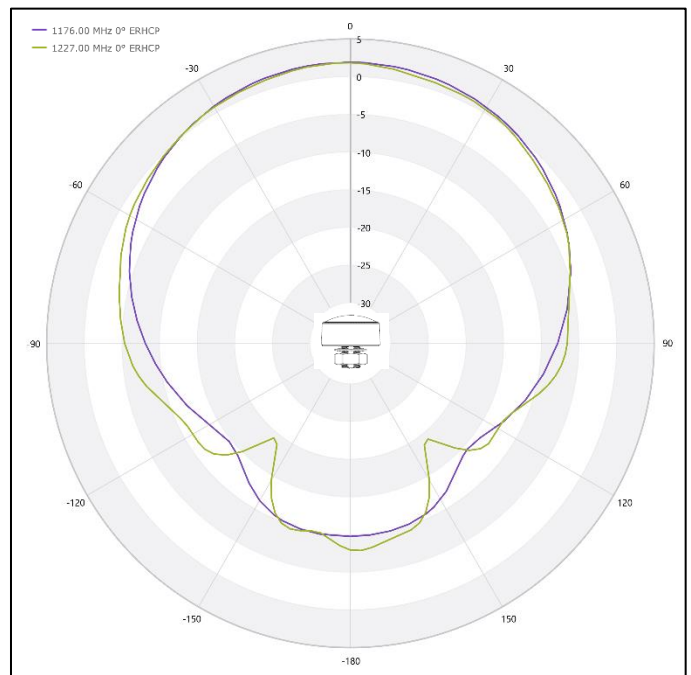


L2 + L5 Pattern

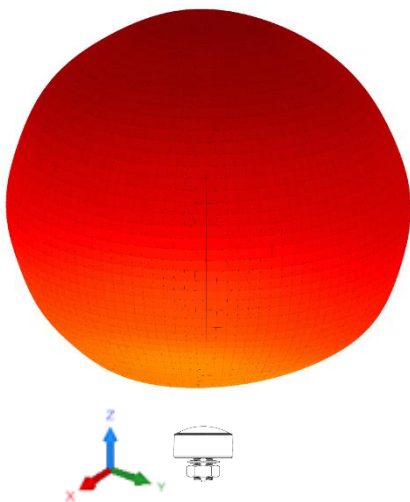

L1 3D RHCP Pattern  
 @1575 MHz

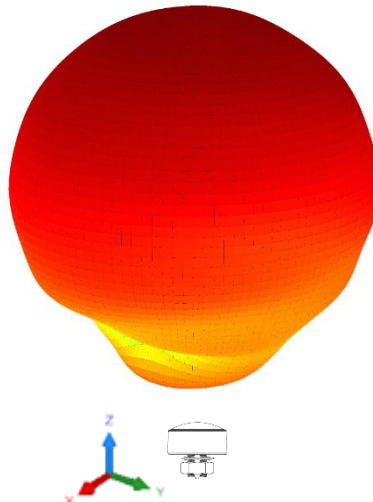

L2 3D RHCP Pattern  
 @1227 MHz

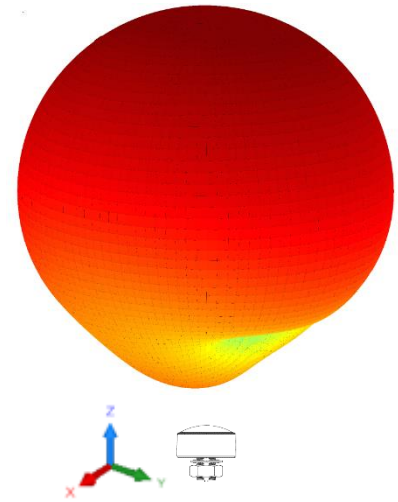

L5 3D RHCP Pattern  
 @1176 MHz

## Reliability Tests

Temperature change	-40°C to +85 °C, MIL-STD 810G Method 503.5. 1.Room Temperature to -40 °C (2hours) 2.Storage for 2 hours at -40 °C 3. -40 °C to 85 °C (2hours) 4. Storage for 2 hours at 85 °C 5. 85 °C to -40 °C ( 2hours) 6.Repeat from 2 to 5 for 5 times 7. -40 °C increase to room temperature within 2 hours (Total 44 Hrs) No loss of function after tests.
Storage test	-40°C to +85°C, MIL STD 810G Method 501.5 (high) Method 502.5 (low) 1.Room Temperature to -40°C within 2 hours 2.Storage for 24 hours at -40°C; 3. -40°C to room temperature within 2 hours 4.Room Temperature to +85°C within 2 hours 5.Storage for 24 hours at 85°C; 6. 85°C room temperature within 2 hours(Total 56 Hrs) No loss of function after tests.
Shock test	1.Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) 2.Peak value: 1,500g's 3.Duration: 0.5ms 4.Waveform: Half si. No loss of function after tests.
Drop test	Drop test (single device) for mounted device, the antenna needs to be fixed to PCB and then assemble PCBA into the covers for the test, please do the test with Armadillo antenna, only need the PCB and top/bottom cover for the tests.
Vibration test	Random vibration input of 60 min/axis, all three perpendicular axis. Transportation frequency 5-500 Hz using Fig 514.6C-I and Table 514.6-II of MIL STD 810G section 514.6, performed only upon customer request., no loss of function after tests.

## Package

Each antenna wrapped in plastic bag  
 40 PCS/ carton box  
 Carton box dimensions (MM): 460x235x140

### For More Information:

Americas - [antennas.us@pulseelectronics.com](mailto:antennas.us@pulseelectronics.com) | Europe – [antennas.eu@pulseelectronics.com](mailto:antennas.eu@pulseelectronics.com) | Asia – [antennas.as@pulseelectronics.com](mailto:antennas.as@pulseelectronics.com) | Questions? +1-800-ANTENNA  
 Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.  
 Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128

***'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'***