

Description : 3216 UWB 6.5-8GHz Chip Antenna**PART NUMBER : ANT3216LL02R6580A****Features:**

- Size : 3.2x1.6x1.2 mm
- Omni-directional Radiation
- Tape & reel automatic mounting
- Reflow process compatible
- RoHS compliant
- AEC-Q200 Qualified

Applications:

- Smart tag
- Indoor navigation
- Access management
- RTLS B2B
- UWB group Channel 5 (6.5 GHz) to Channel 10 (8.5 GHz)

ELECTRICAL SPECIFICATIONS

Working Frequency	6200 ~ 8500 MHz
Bandwidth	2000 MHz
Return Loss	10 dB (Min.)
Polarization	Linear
Gain	4.1 dBi ~ 7.3 dBi
Impedance	50 Ω
Operating Temperature	-40 ~ 125 $^{\circ}\text{C}$
Maximum Power	1 W
Termination	Ni / Sn (Environmentally-Friendly Leadless)
Resistance to Soldering Heats	260 $^{\circ}\text{C}$, 10sec.

NOTE

1. The specification is defined on Pulse evaluation board

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:



Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551


Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

Description : 3216 UWB 6.5-8GHz Chip Antenna


PART NUMBER : ANT3216LL02R6580A

MECHANICAL DRAWING

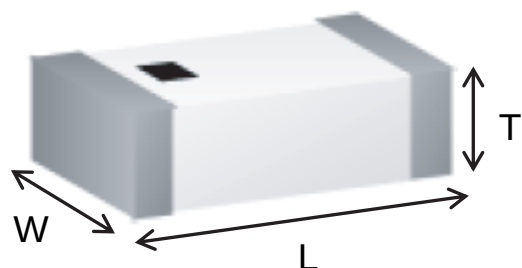

	Dimension
L (mm)	3.20 ± 0.20
W (mm)	1.60 ± 0.15
T (mm)	1.20 ± 0.15
A (mm)	0.40 ± 0.25

Terminal name	Function
S1	Feeding Point
S2	Soldering Point

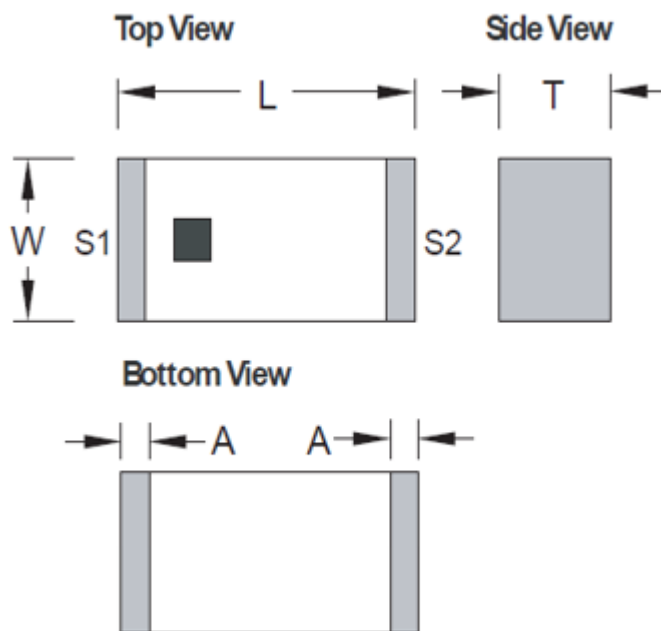


Netweigh/pcs(g) : 0.016

Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A

REFERENCE DESIGN OF EVALUATION BOARD

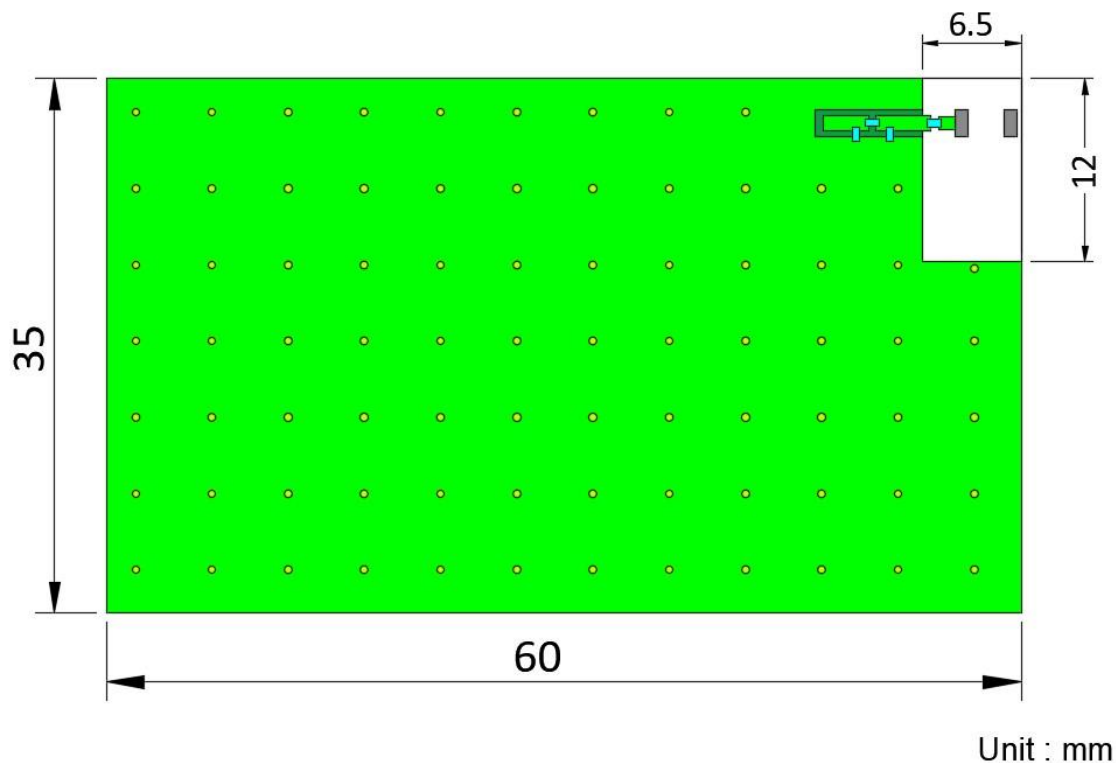


Dimension of evaluation board (60x35mm)

Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A

REFERENCE DESIGN OF EVALUATION BOARD

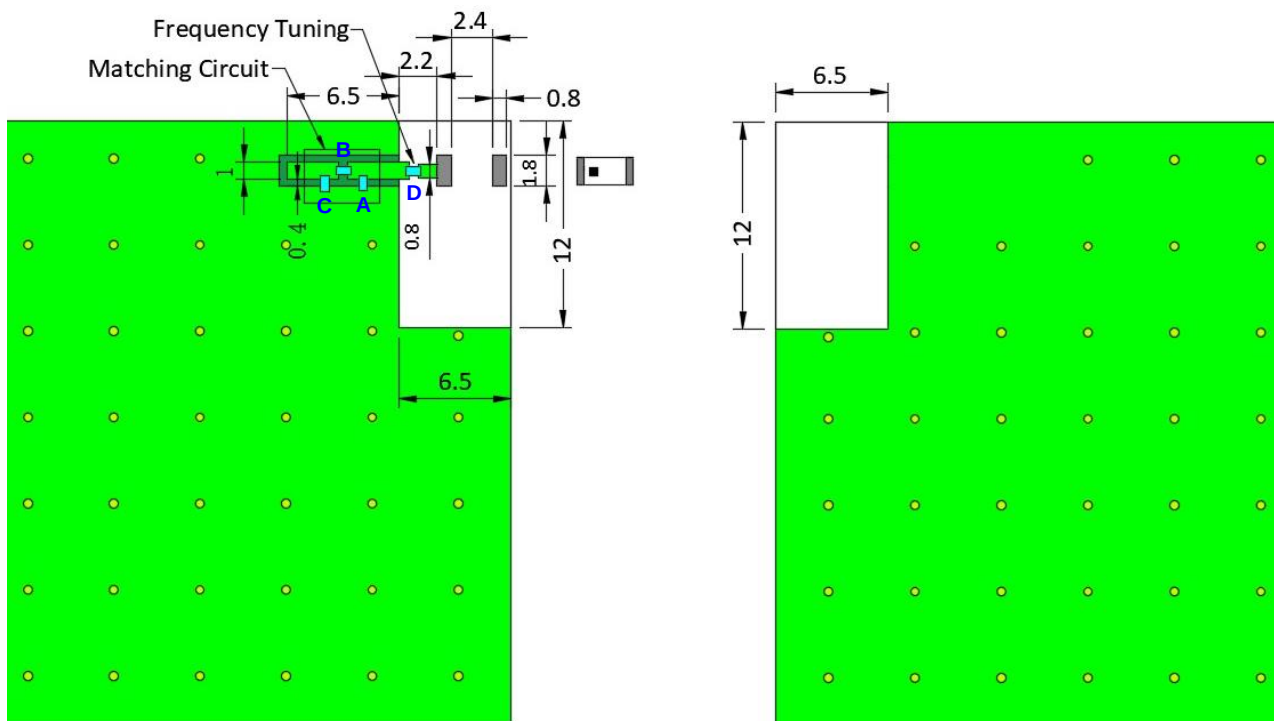


Top Layer

Unit : mm

Bottom Layer

Application and Clearance (12x6.5mm)

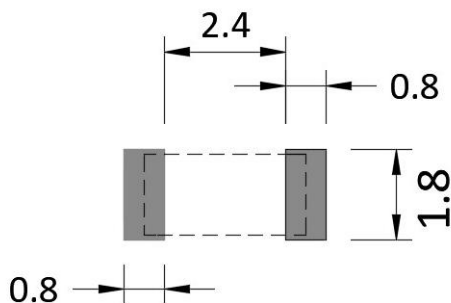

Unit : mm

 : Antenna Outline

Footprint

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A

ELECTRICAL PERFORMANCES

Component	Brand	Value	PN
A	Ind. _0402	TDK	1.5 nH
B	Ind. _0402	TDK	1.0 nH
C	Open		
D	Res. _0402	0 Ω	

Matching component values (The values are for reference only.)

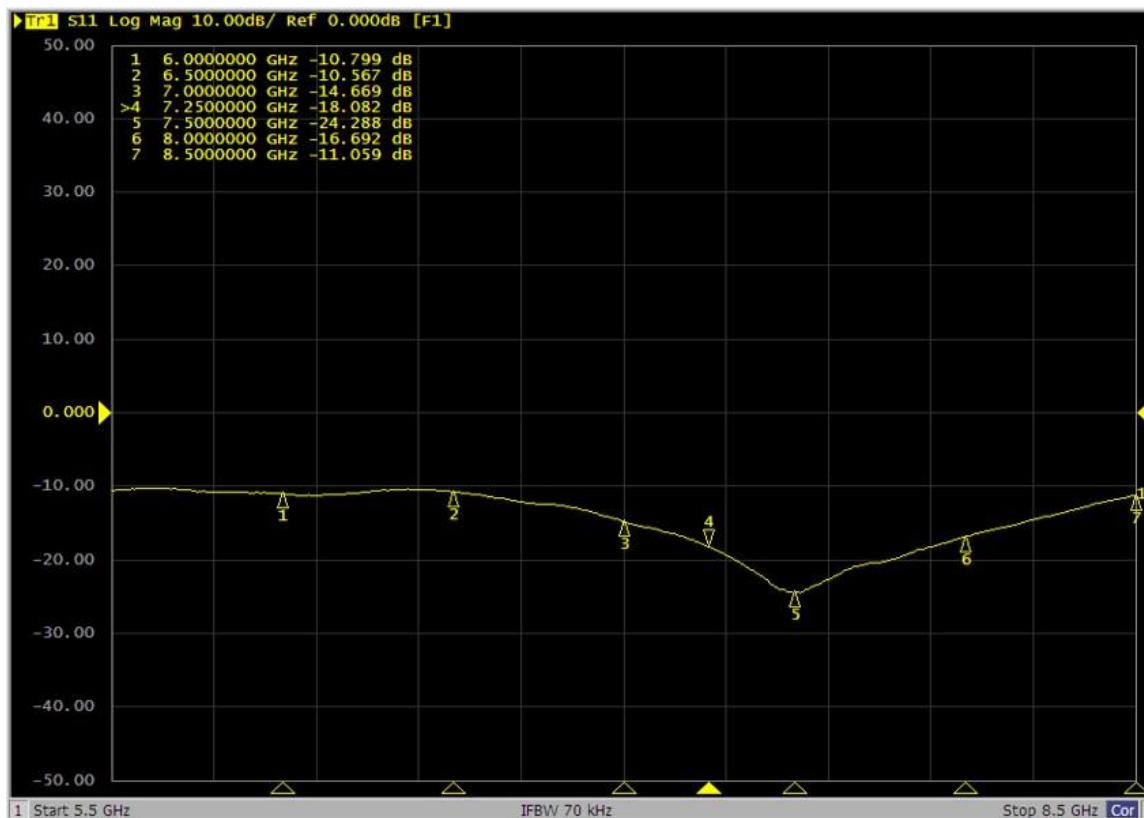

Return loss

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A



RADIATION PATTERN

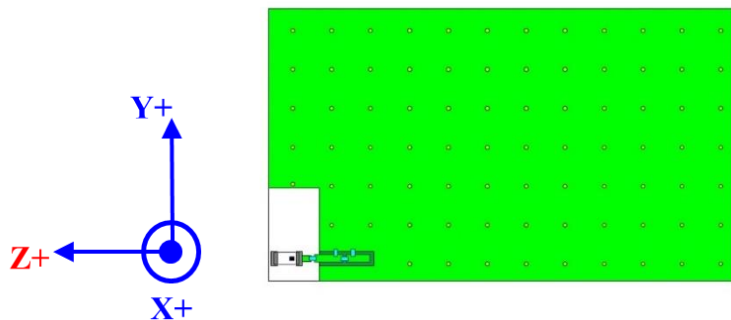

Evaluation board and XYZ direction

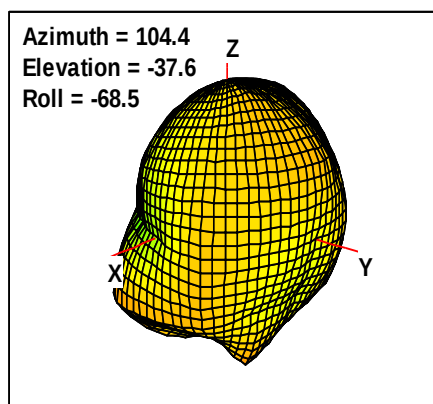

Frequency : 6200 MHz
Max. Gain : 4.1 dBi
Efficiency : 83.5 %

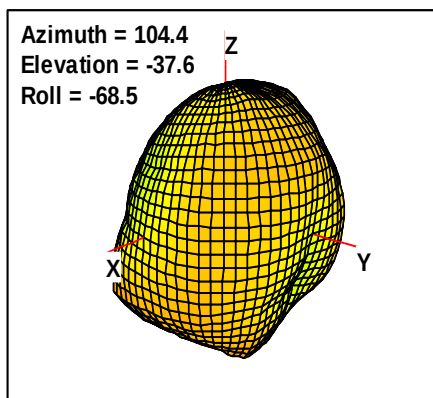

Frequency : 6500 MHz
Max. Gain : 4.4 dBi
Efficiency : 80.3 %

Radiation pattern

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A



RADIATION PATTERN

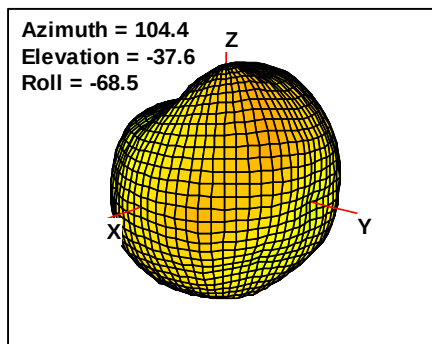



Frequency : 7200 MHz
Max. Gain : 7.3 dBi
Efficiency : 87.1 %

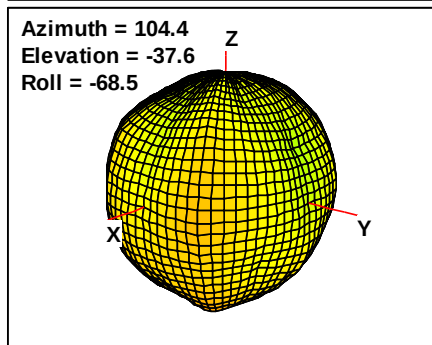

Frequency : 8000 MHz
Max. Gain : 6.9 dBi
Efficiency : 73.7 %

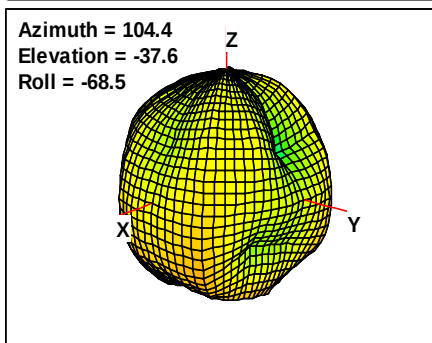

Frequency : 8200 MHz
Max. Gain : 5.5 dBi
Efficiency : 72.8 %

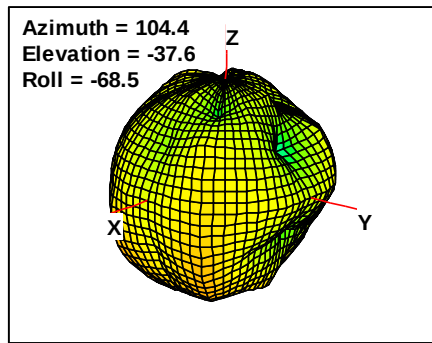

Frequency : 8500 MHz
Max. Gain : 4.4 dBi
Efficiency : 69.0 %

Radiation pattern

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A

Tape & Reel Configurations

Serial no	Checking note	Index
1	Sprocket hole	Do
2	Distance sprocket hole to sprocket hole	Po
3	Distance pocket to pocket	P1
4	Distance sprocket hole/pocket	P2
5	Tape width	W
6	Distance sprocket hole to outside	E
7	Distance sprocket hole to pocket	F
8	Reel Diameter	R

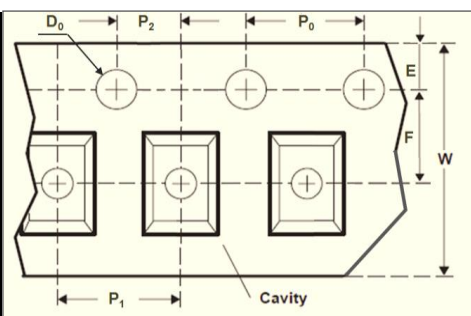

Product Size Code	Product Size (mm)	Tape & Reel Configurations								
		Q'ty (Kpcs)	D0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	E (mm)	F (mm)	R (mm)
0605	0.6 x 0.5	10	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.05 / -0.05)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
1005	1.0 x 0.5	10	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.05 / -0.05)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
1608	1.6 x 0.8	4	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
2012	2.0 x 1.2	4	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
2520	2.5 x 2.0	3	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
3216	3.2 x 1.6	3	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	8 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	3.5 (+0.05 / -0.05)	180±2
5010	5.0 x 1.0	3	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
5320	5.3 x 2.0	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	12 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	5.5 (+0.1 / -0.1)	180±2
6020	6.0 x 2.0	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	12 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	5.5 (+0.1 / -0.1)	180±2
6230	6.2 x 3.0	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	12 (+0.3 / -0.1)	1.75 (+0.1 / -0.1)	5.5 (+0.1 / -0.1)	180±2
7020	7.0 x 2.0	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
7836	7.8 x 3.6	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	8 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
8010	8.0 x 1.0	3	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
8868	8.8 x 6.8	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	12 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
9520	9.5 x 2.0	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	4 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
1003	10 x 03	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	8 (+0.1 / -0.1)	2 (+0.1 / -0.1)	16 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	7.5 (+0.1 / -0.1)	180±2
1204	12 x 04	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	8 (+0.1 / -0.1)	2 (+0.1 / -0.1)	24 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	11.5 (+0.1 / -0.1)	180±2
1212	12 x 12	0.5	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	16 (+0.1 / -0.1)	2 (+0.1 / -0.1)	24 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	11.5 (+0.1 / -0.1)	330±2
1515	15 x15	0.4	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	20 (+0.1 / -0.1)	2 (+0.1 / -0.1)	32 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	14.2 (+0.1 / -0.1)	330±2
1818	18 x 18	0.4	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	24 (+0.1 / -0.1)	2 (+0.1 / -0.1)	32 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	14.2 (+0.1 / -0.1)	330±2
1903	19 x 03	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	8 (+0.1 / -0.1)	2 (+0.1 / -0.1)	32 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	14.2 (+0.1 / -0.1)	330±2
2405	24 x 05	2	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	8 (+0.1 / -0.1)	2 (+0.1 / -0.1)	44 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	20.2 (+0.1 / -0.1)	330±2
2525	25 x 25	0.25	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	32 (+0.1 / -0.1)	2 (+0.1 / -0.1)	44 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	20.2 (+0.15 / -0.15)	330±2
3807	38 x 07	1	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	12 (+0.1 / -0.1)	2 (+0.15 / -0.15)	56 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	26.2 (+0.15 / -0.15)	330±2
4005	40 x 05	0.6	1.55 (+0.1 / -0.1)	4 (+0.1 / -0.1)	12 (+0.1 / -0.1)	2 (+0.15 / -0.15)	56 (+0.3 / -0.3)	1.75 (+0.1 / -0.1)	26.2 (+0.15 / -0.15)	330±2

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description : 3216 UWB 6.5-8GHz Chip Antenna

PART NUMBER : ANT3216LL02R6580A

REVISION HISTORY

Revision	Date	Description
Preliminary 1	Jan. 2025	- New issue.