

SMD Antenna

2.4GHz LDS Monopole Antenna

SWA434D



Features & Applications:

- Bluetooth devices
- Headsets
- Notebooks and netbooks
- Smart Phones
- Tablet PCs
- 2.4GHz WiFi devices
- Wireless LAN (WLAN)
- IEEE 802.11b/g/n devices
- Tape&Reel packed
- Reflow soldering compatible

ELECTRICAL SPECIFICATIONS @ 25°C

General Specifications 1)

Antenna Type	Nominal Impedance	Polarization	Frequency	Return loss	Efficiency	VSWR	Gain
Monopole	50Ω	Linear	2400~2483.5 MHz	< -5	> 45%	< 3	2.0 to 3.2 dBi

MECHANICAL SPECIFICATIONS

SWA434D

Dimension (Length x Width x Height)	Material	Color	Antenna Type	Mounting Style	MSL	Weight
3mm x 3mm x 4mm	LCP	Black	LDS	SMT	1	0.04g

ENVIRONMENTAL SPECIFICATIONS

SWA434D

Storage Temperature	Operating Temperature	RoHS Compliant
-40/+85° C	-40/+85° C	Yes

Notes:

- 1) Tested on 40x100mm evaluation board, matching circuit 4.3nH shunt inductor



SMD Antenna

2.4GHz LDS Monopole Antenna



SWA434D

Mechanical Drawing

SWA434D

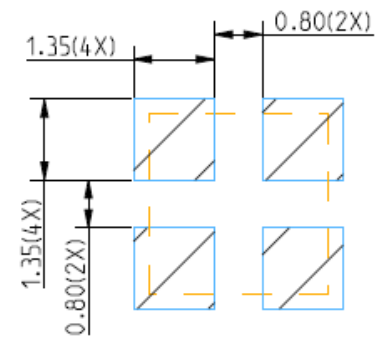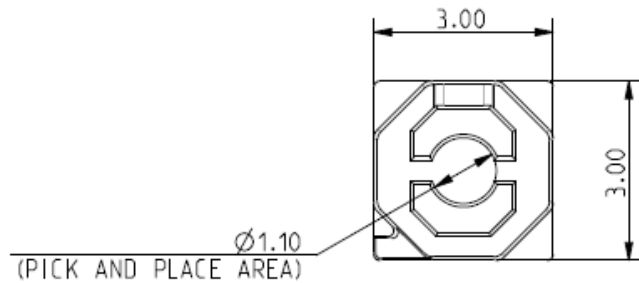

RECOMMENDED PCB LAYOUT

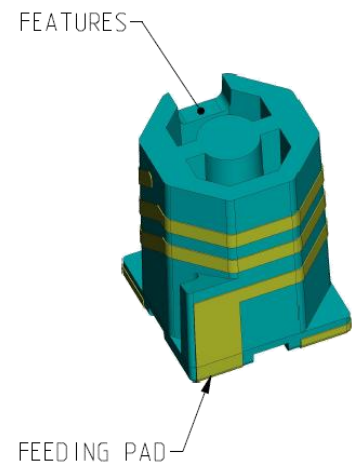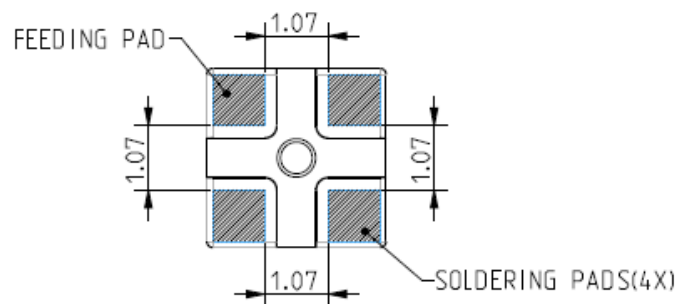

3D VIEW

Dimensions: mm

Recommendation for Reflow Soldering Process

SWA434D

Printing stencil thickness 0.15 to 0.25 mm is recommended for solder paste. The maximum soldering temperature should not exceed 250°C.

The temperature profile recommendations for reflow solder process are presented in Figure 1 and 2. The reflow profile presented in Figure 2 describes maximum reflow temperatures.

Figure 1 - Minimum temperature profile recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5°C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 30 sec
5	Peak temperature in reflow	230°C for 10 seconds
6	Temperature gradient in cooling	Max -5°C/s


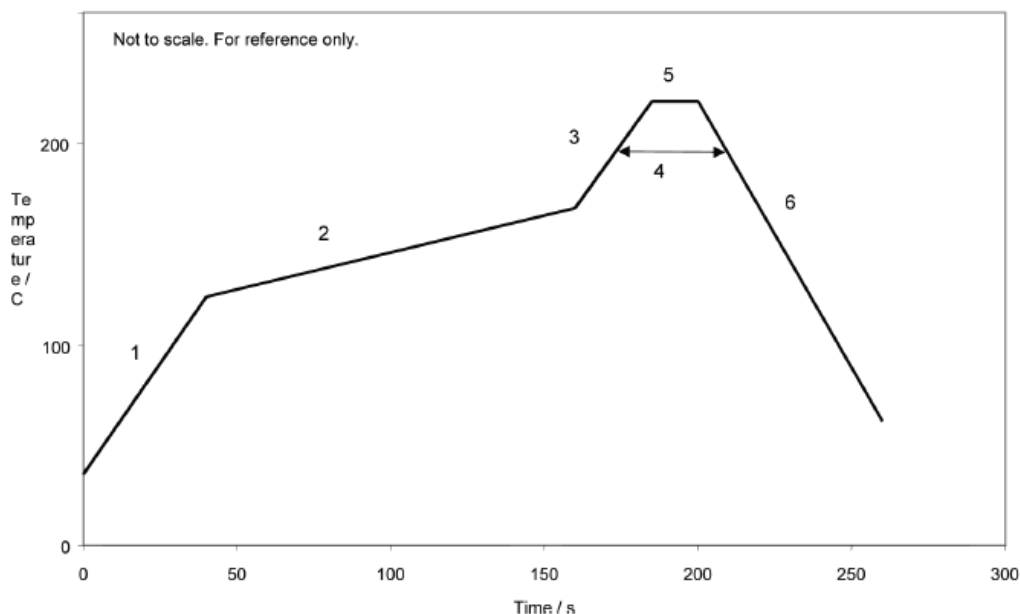


Figure 2 - Maximum temperature profile recommendation for reflow soldering process

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	$\leq 2^{\circ}\text{C/s}$
2	Soak time	1-2 minutes
3	Max temperature gradient in reflow	3°C/s
4	Time above 217°C	Max 60 sec
5	Time above 230°C	Max 50 sec
7	Peak temperature in reflow	250°C
8	Temperature gradient in cooling	Max -5°C/s

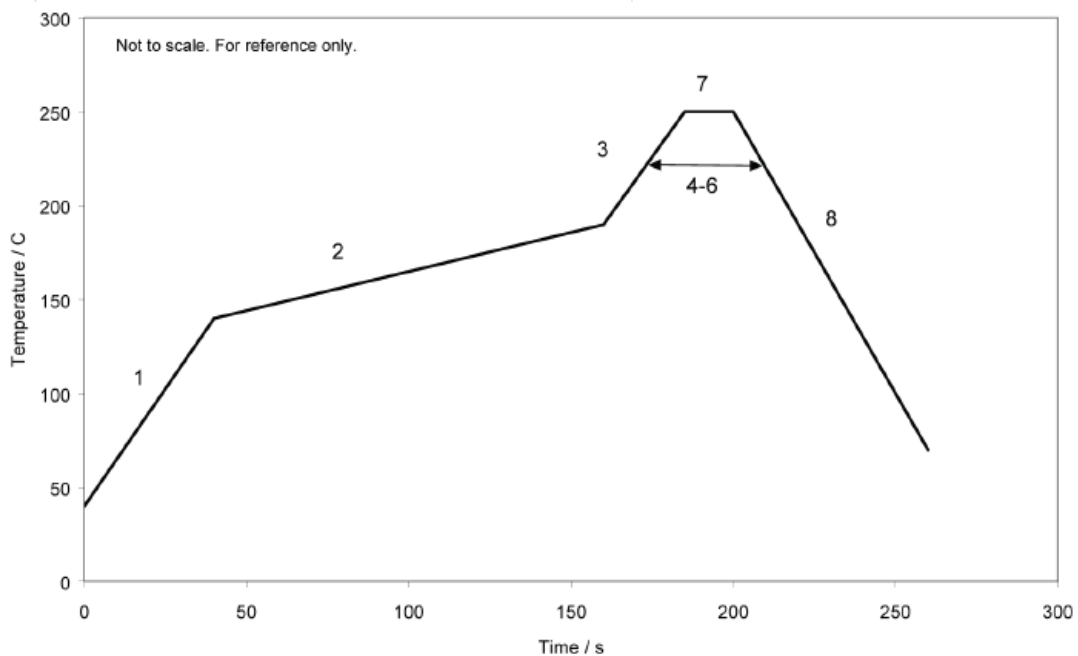

SMD Antenna




2.4GHz LDS Monopole Antenna

SWA434D


Test Setup

SWA434D

Pulse reference test PCB for SWA434D antenna

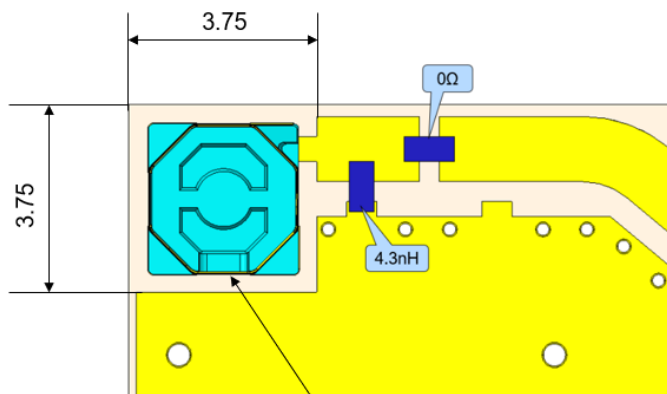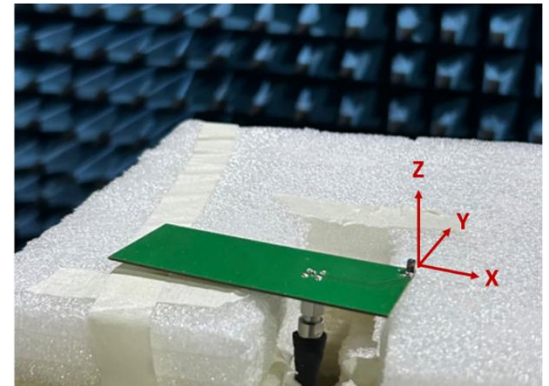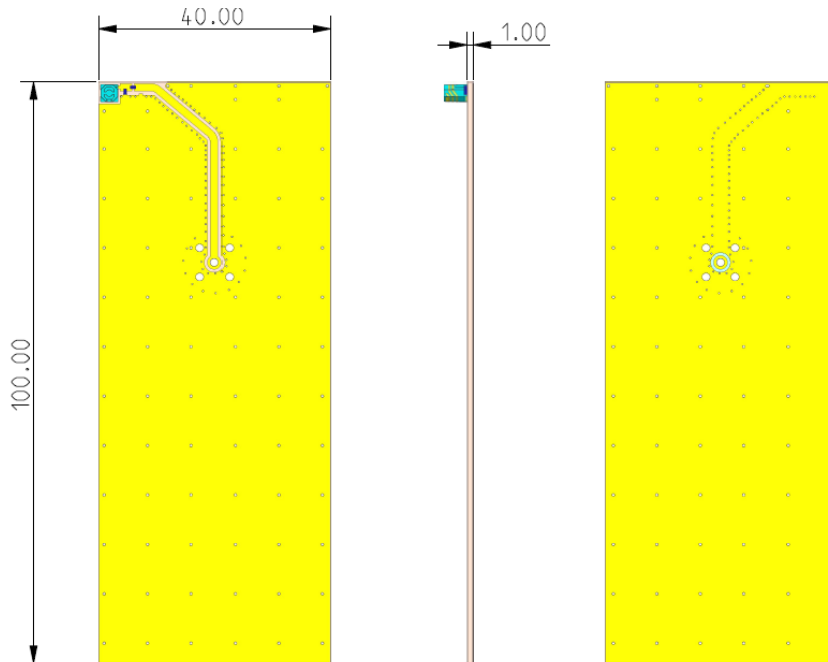

3.75mm*3.75mm keep out area on PCB top side


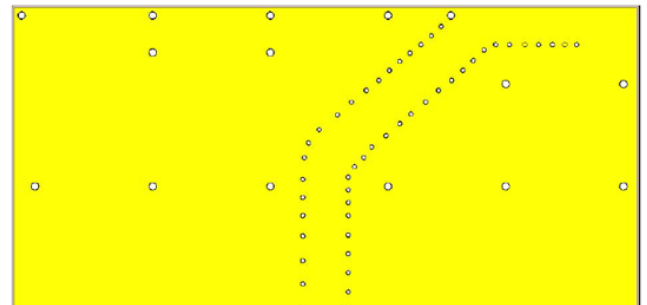


No keep out area on PCB bottom side

Dimensions: mm



Charts- Antenna Return Loss & VSWR

SWA434D

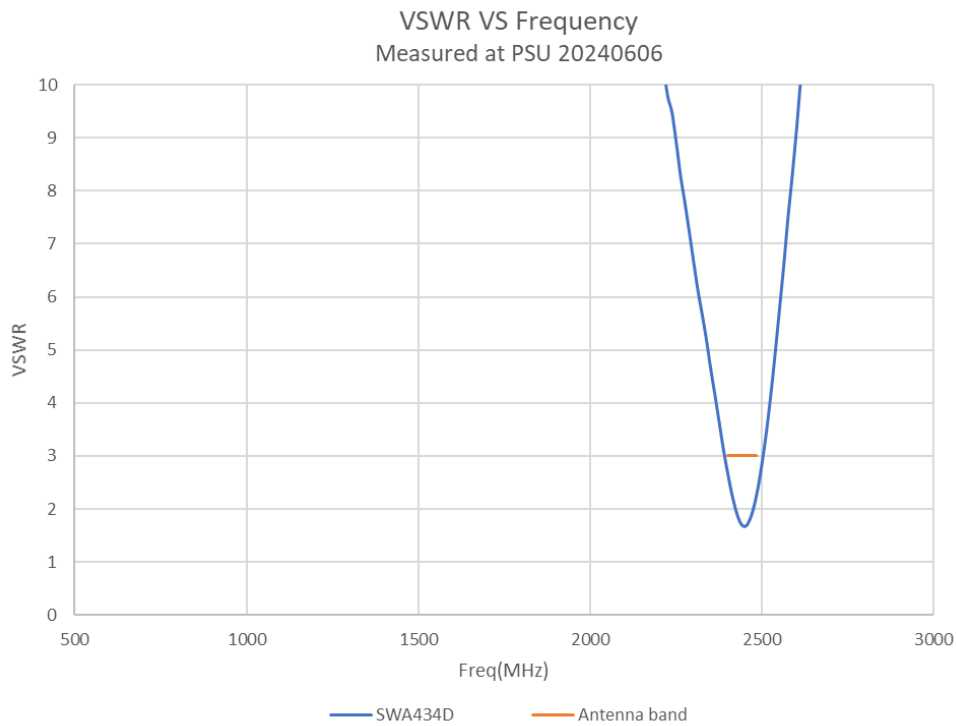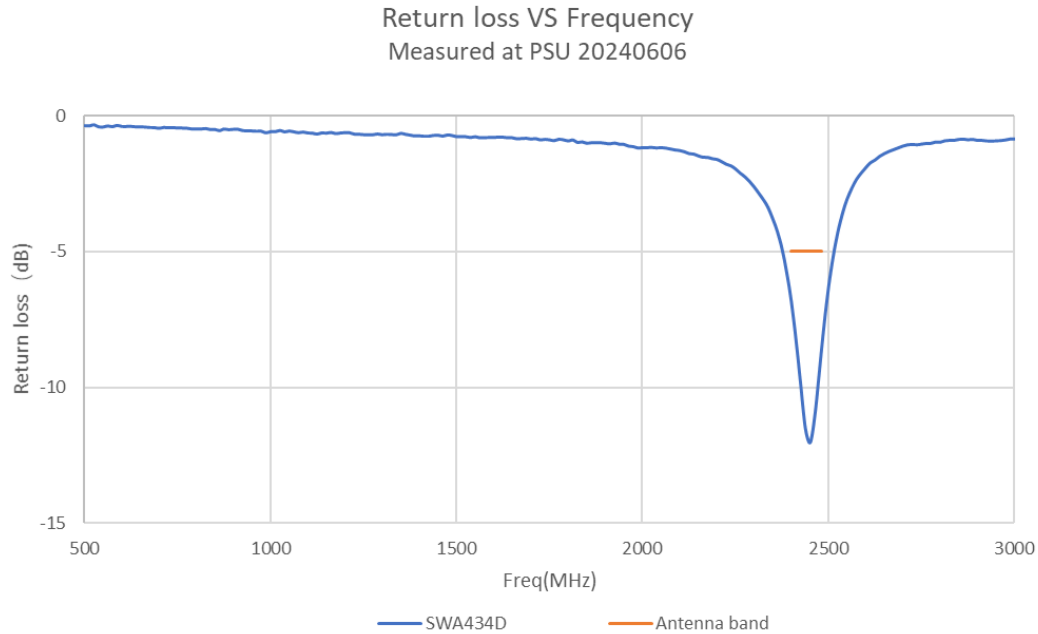

Charts- Efficiency & Peak Gain

SWA434D

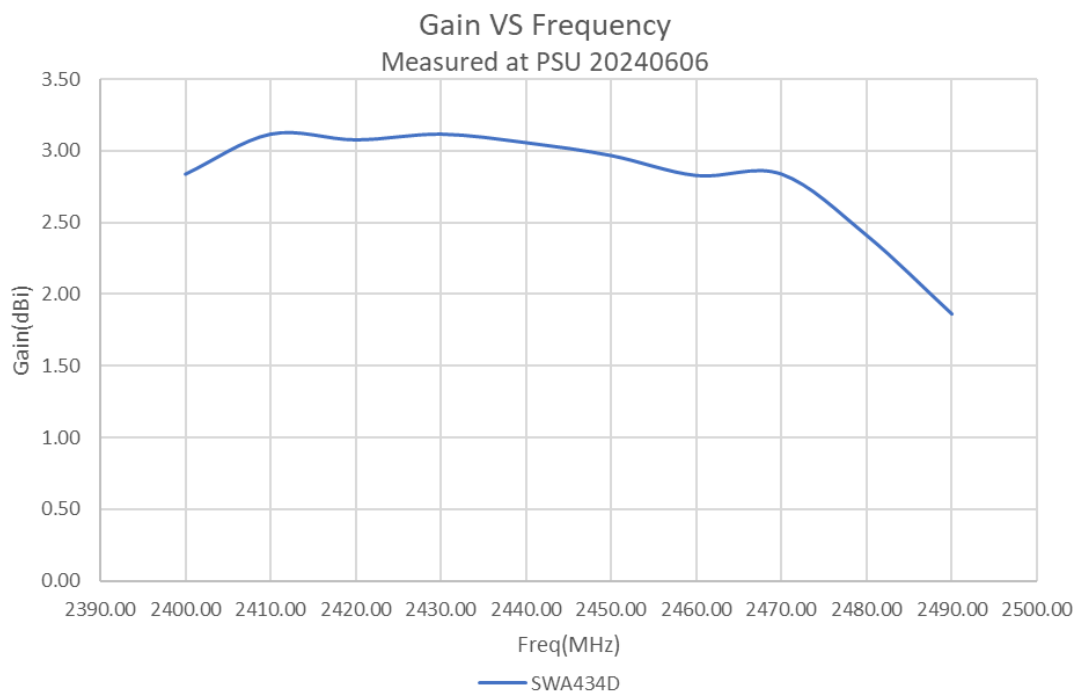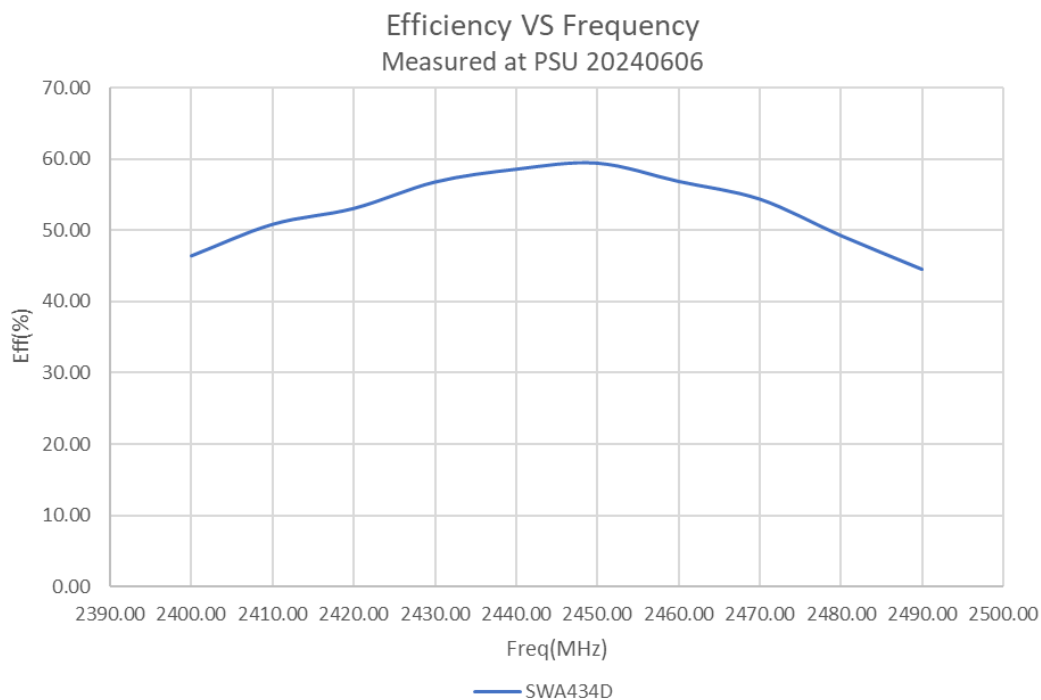





SMD Antenna

2.4GHz LDS Monopole Antenna

SWA434D





Charts – Antenna Radiation Gain Pattern

SWA434D

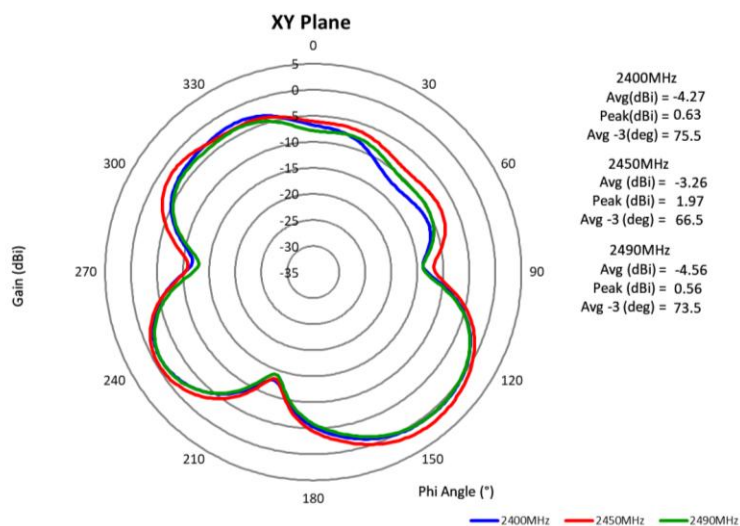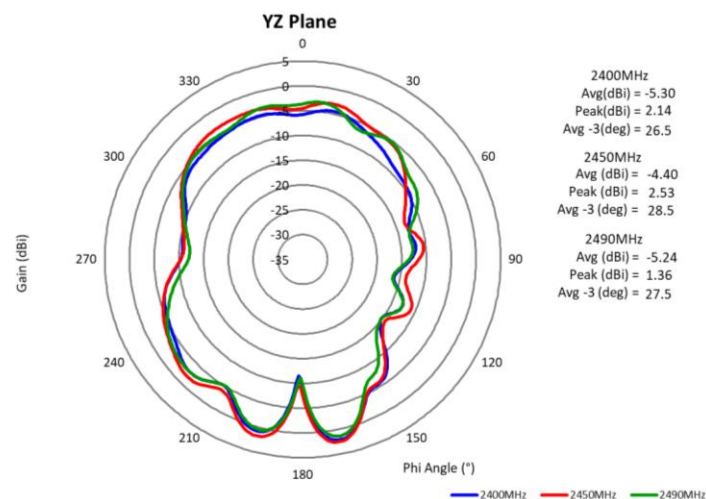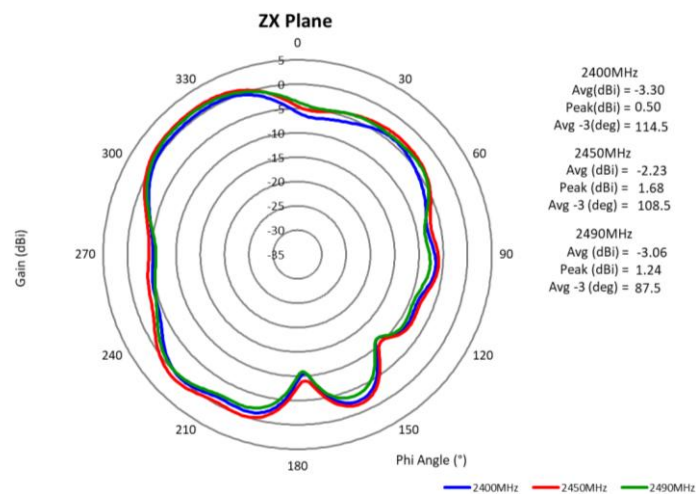

PCB Length Effect

SWA434D

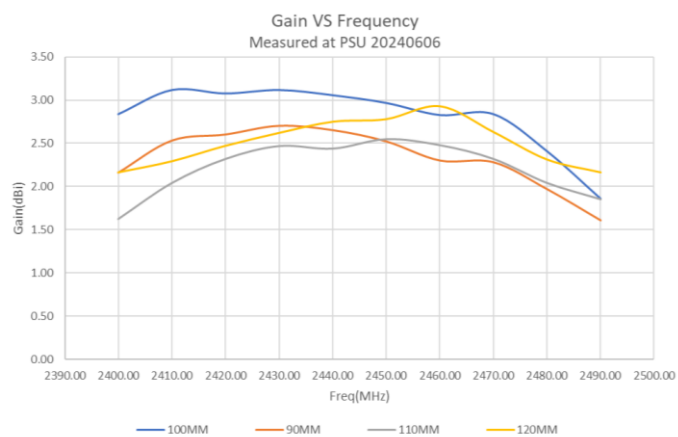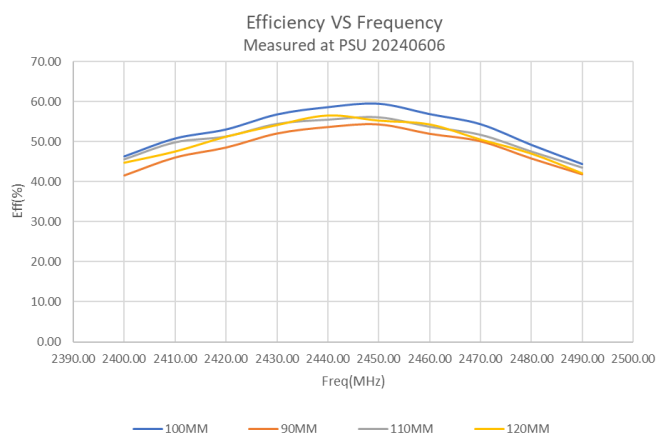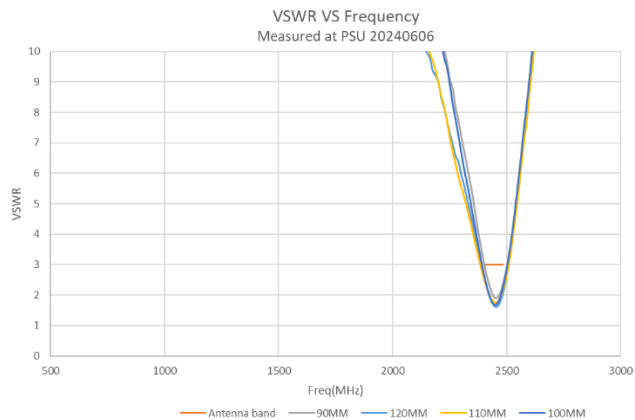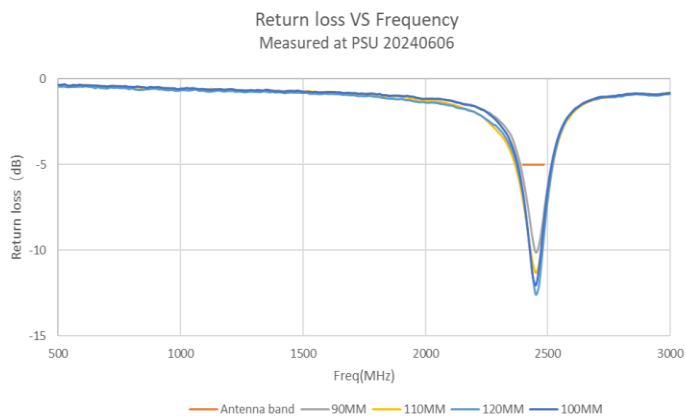

SMD Antenna


2.4GHz LDS Monopole Antenna

SWA434D

Packaging

SWA434D

1. Reel & tape packing
2. 500pcs/reel → 6 reels/inner box → 2 inner boxes/package box
3. Total 6000pcs for one package, package box size: 390mm*215mm*165mm

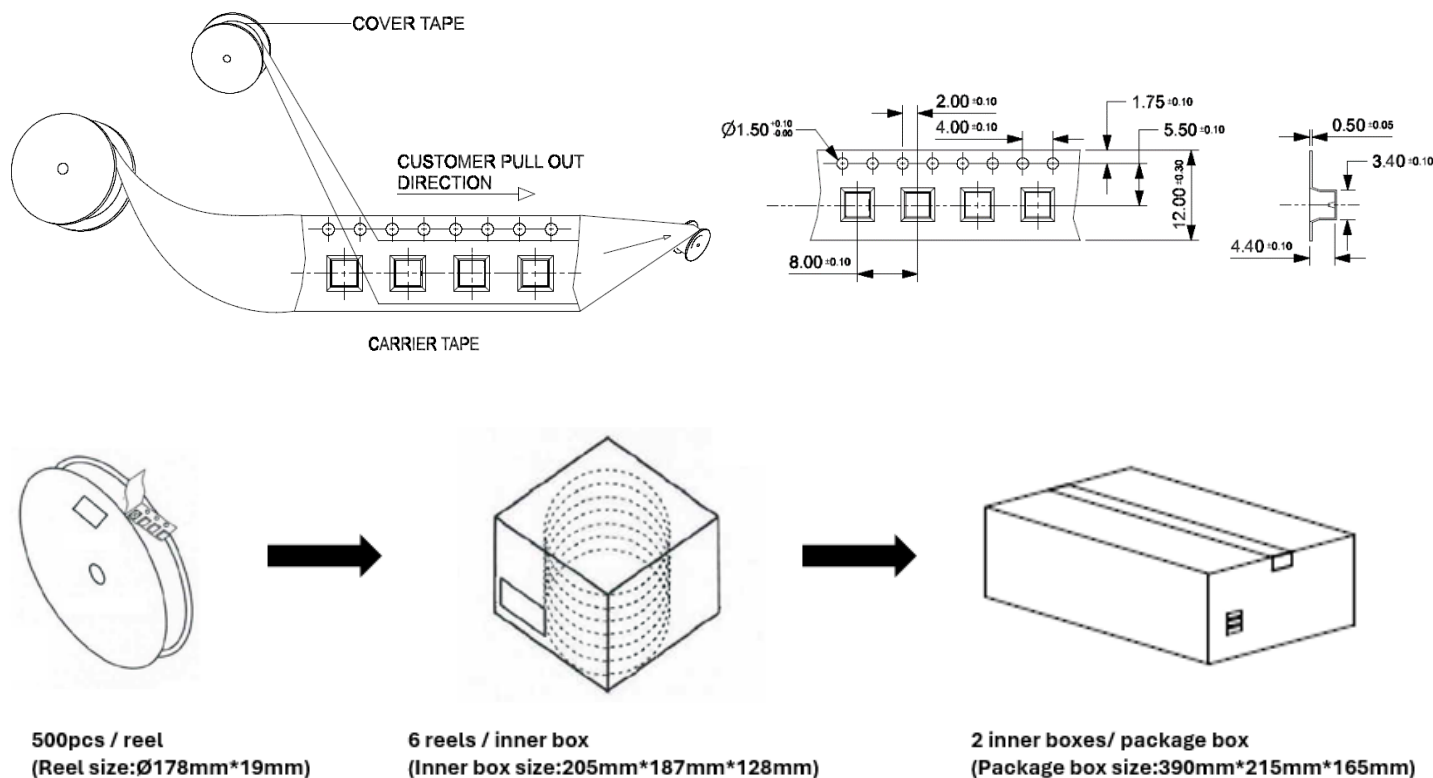

For More Information:

Americas - antennas.us@pulseelectronics.com | Europe - antennas.eu@pulseelectronics.com | Asia - antennas.as@pulseelectronics.com | Questions? +1-800-ANTENNA
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright , 2020. Pulse Electronics, Inc. All rights reserved.
Company address: Pulse Electronics, a YAGEO Company, 15255 Innovation Drive, Suite #100, San Diego, CA 92128.

'YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.'