

**CRI10024T****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration

**General ordering data**

|            |                                                                                                                                                                                   |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | CUBESERIES, Relay, Number of contacts: 1, CO contact AgNi, Rated control voltage: 24 V DC +10 % / -20 %, Continuous current: 16 A, Plug-in connection, Test button available: Yes |
| Order No.  | <a href="#">3052360000</a>                                                                                                                                                        |
| Type       | CRI10024T                                                                                                                                                                         |
| GTIN (EAN) | 4099987022194                                                                                                                                                                     |
| Qty.       | 10 pc(s).                                                                                                                                                                         |

## CRI10024T

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 25.5 mm | Depth (inches)  | 1.004 inch |
| Height     | 29 mm   | Height (inches) | 1.142 inch |
| Width      | 13 mm   | Width (inches)  | 0.512 inch |
| Net weight | 15 g    |                 |            |

## Temperatures

|                     |                                       |                       |                |
|---------------------|---------------------------------------|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C                        | Operating temperature | -40 °C...70 °C |
| Humidity            | 35...85 % RH (at ambient temperature) |                       |                |

## Rated data UL

|                         |         |
|-------------------------|---------|
| Certificate No. (cURus) | E223474 |
|-------------------------|---------|

## Control side

|                       |                        |                  |               |
|-----------------------|------------------------|------------------|---------------|
| Rated control voltage | 24 V DC + 10 % / -20 % | Rated current DC | 16.7 mA       |
| Power rating          | 400 mW                 | Coil resistance  | 1440 Ω ± 10 % |
| Status indicator      | No                     |                  |               |

## Load side

|                                         |                                      |                                         |                            |
|-----------------------------------------|--------------------------------------|-----------------------------------------|----------------------------|
| Rated switching voltage                 | 250 V AC                             | Continuous current                      | 16 A                       |
| Max. switching frequency at rated load  | 0.1 Hz                               | Max. switching voltage, AC              | 250 V                      |
| Max. switching voltage, DC              | 250 V                                | AC switching capacity (resistive), max. | 4000 VA                    |
| DC switching capacity (resistive), max. | 384 W @ 24 V                         | Switch-on delay                         | ≤ 15 ms                    |
| Switch-off delay                        | ≤ 8 ms                               | Contact type                            | 1 CO contact (AgNi)        |
| Mechanical service life                 | 5 x 10 <sup>6</sup> switching cycles | Min. switching power                    | 10 mA @ 12 V, 100 mA @ 5 V |

## General data

|                        |                                             |                                      |     |
|------------------------|---------------------------------------------|--------------------------------------|-----|
| Operating altitude     | ≤ 2000 m, above sea level                   | Test button available                | Yes |
| Version of test button | Lockable test button, Momentary test button | Mechanical switch position indicator | Yes |
| Colour                 | Transparent                                 | UL 94 flammability rating            | V-2 |

## Insulation coordination

|                                                               |                             |                                                  |                             |
|---------------------------------------------------------------|-----------------------------|--------------------------------------------------|-----------------------------|
| Rated voltage                                                 | 250 V                       | Pollution severity                               | 3                           |
| Surge voltage category                                        | III                         | Insulating material group                        | IIIa                        |
| Clearance and creepage distances for control side - load side | ≥ 8 mm                      | Dielectric strength for control side - load side | 5 kV <sub>eff</sub> / 1 min |
| Dielectric strength of open contact                           | 1 kV <sub>eff</sub> / 1 min | Impulse withstand voltage                        | 6 kV (1.2/50 μs)            |
| Impulse withstand voltage at neighbouring contacts            | 4 kV (1.2/50 μs)            |                                                  |                             |

## Further details of approvals / standards

|                         |                 |                       |          |
|-------------------------|-----------------|-----------------------|----------|
| Certificate No. (CSA)   | 607226-80220633 | Certificate No. (VDE) | 40057912 |
| Certificate No. (cURus) | E223474         |                       |          |

## CRI10024T

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Connection data

|                        |                    |                 |      |
|------------------------|--------------------|-----------------|------|
| Wire connection method | Plug-in connection | Pitch in mm (P) | 5 mm |
|------------------------|--------------------|-----------------|------|

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ETIM 8.0    | EC001437    | ETIM 9.0    | EC001437    |
| ETIM 10.0   | EC001437    | ECLASS 9.0  | 27-37-16-01 |
| ECLASS 9.1  | 27-37-16-01 | ECLASS 10.0 | 27-37-16-01 |
| ECLASS 11.0 | 27-37-16-01 | ECLASS 12.0 | 27-37-16-01 |
| ECLASS 13.0 | 27-37-16-01 | ECLASS 14.0 | 27-37-16-01 |
| ECLASS 15.0 | 27-37-16-01 |             |             |

## Environmental Product Compliance

|                                      |                          |
|--------------------------------------|--------------------------|
| RoHS Compliance Status               | Compliant with exemption |
| RoHS Exemption (if applicable/known) | 7cl                      |
| REACH SVHC                           | No SVHC above 0.1 wt%    |

## Approvals

Approvals



|                         |                                                                                                                                                                             |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals MAMID         | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319226/-T1z1mm-S800/</a> |
| ROHS                    | Conform                                                                                                                                                                     |
| UL File Number Search   | UL Website                                                                                                                                                                  |
| Certificate No. (cURus) | E223474                                                                                                                                                                     |

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |


## CRI10024T

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Drawings


### Connection diagram

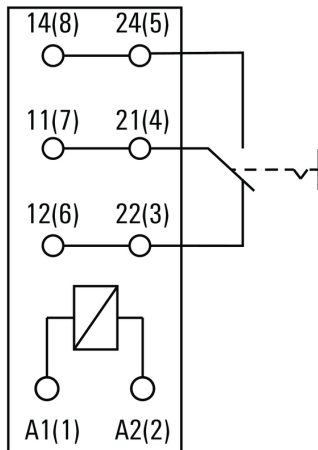


### Graph

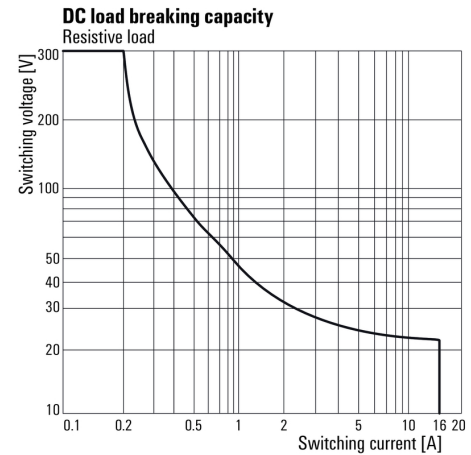


### Graph

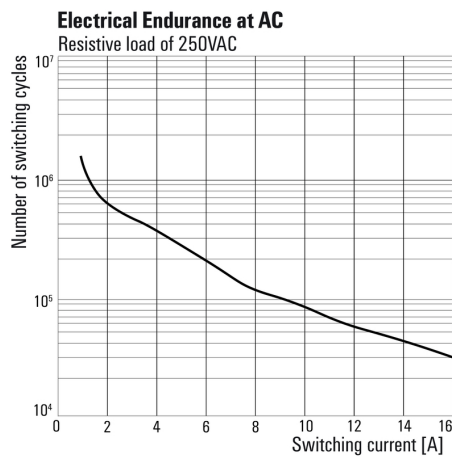

### Graph

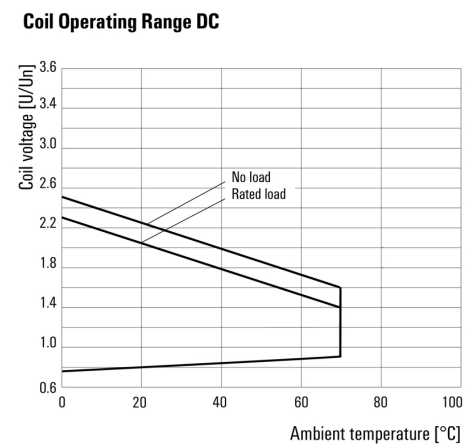

### Dimensional drawing

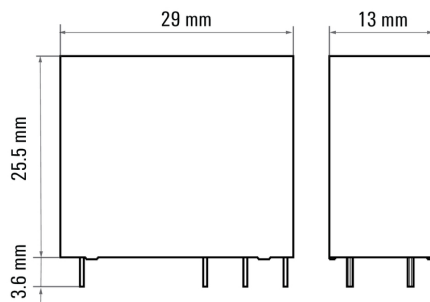


**CRI10024T****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

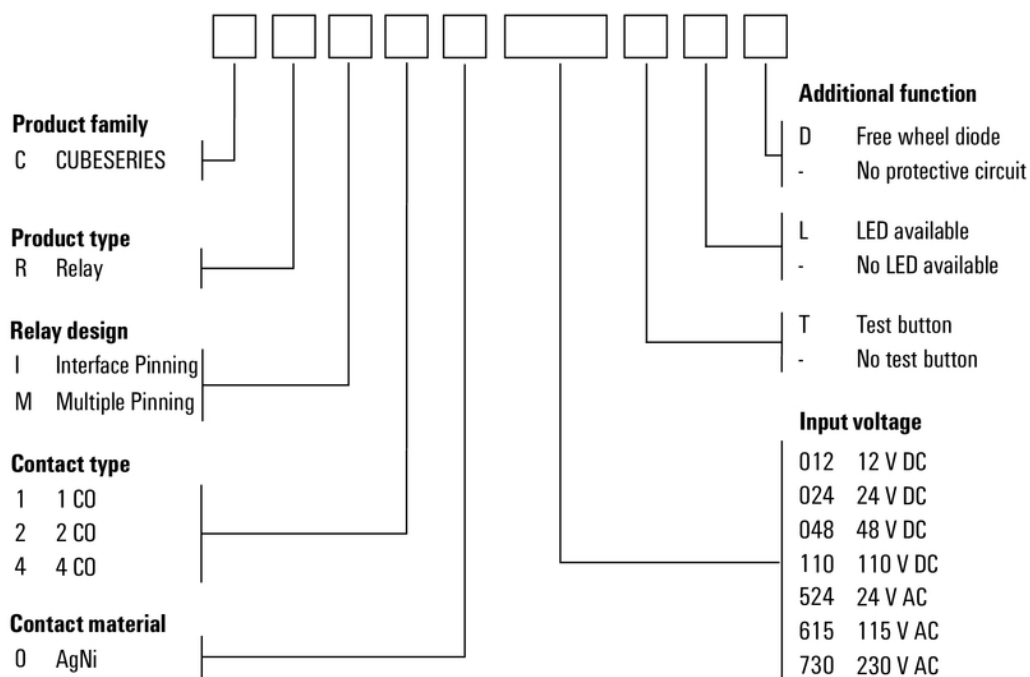[www.weidmueller.com](http://www.weidmueller.com)**Drawings****Miscellaneous****Type code CUBESERIES relay versions**

Type codes