



General characteristics

Description	Multifunction time relay, multiscale and multivoltage, 2 relay outputs		
Function	Multifunction		
Supply circuit			
Rated auxiliary supply voltage U_s	12...240VAC/DC		
Rated auxiliary supply voltage U_s AC	min Max	VAC VAC	12 240
DC	min Max	VDC VDC	12 240
Rated frequency	Hz		50/60
Operating voltage range	0.85...1.1 U_s		
Maximum power consumption / dissipation	W		1.1VA/0.8W (12...48VAC/DC), 1.8VA/1.2W (110...240VAC/DC)
Immunity time for microbreakings	ms		≤15
Timing circuit			
Time setting range	0.1s...10days		
Setting accuracy	%		<±9
Repeat accuracy	%		<±0.2
Influence of voltage variation	%		<±0.1
Influence of temperature variation	%		<±0.2
External command input	Minimum ON time Connenction time	ms	25 permanent
Resetting time	During timing Elapsed time	ms ms	≥100 ≥50
Relay outputs			
Number of relays	Nr.		2
Contact arrangement	1 inst./delayed N/O + 1 delayed C/O		
Maximum switching voltage	VAC		250
IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}\text{C}$	A		8
UL/CSA and IEC/EN 60947-5-1 designation	B300		
Insulation (input-output)			
Rated insulation voltage U_i	V		250
Rated impulse withstand voltage U_{imp}	kV		4
Power frequency withstand voltage	kV		2

Connections

Terminals type	Screw		
Tightening torque (Max)	Tightening torque Max	Nm	0.8
	Tightening torque Max	lbin	7 / 7...9 UL
Conductor section			
AWG/Kcmil	min		24...12
	max		12...18
IEC	min	mm ²	0.2
	max	mm ²	4


Operations

Mechanical life	cycles	30000000
Electrical life (with rated load)	cycles	100000



Ambient conditions

Temperature			
Operating temperature	min	°C	-20
	max	°C	+60
Storage temperature	min	°C	-30
	max	°C	+80
Relative humidity		%	<90%
Maximum Pollution degree			2
Overvoltage category			III
Housing			
Execution (n° of modules)			1
Material			Self-extinguishing polyamide
Mounting			DIN rail 35 mm
Degree of protection			IP40 on front, IP20 terminals
Dimensions (W x H x D)		mm	17.5 x 104.7 x 64.9
Weight		g	94

Dimensions

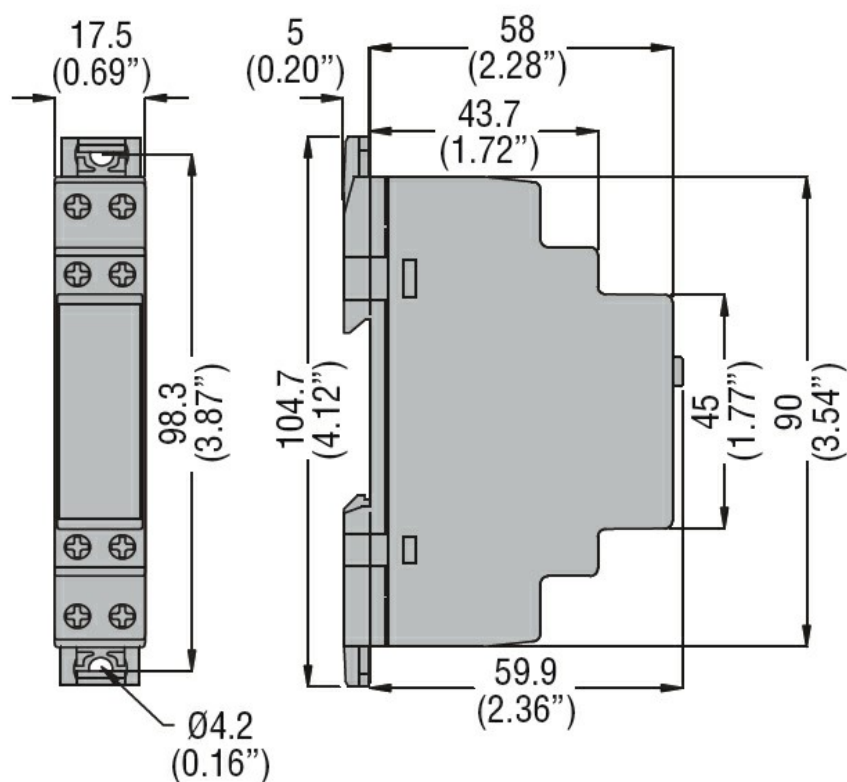

Wiring diagrams

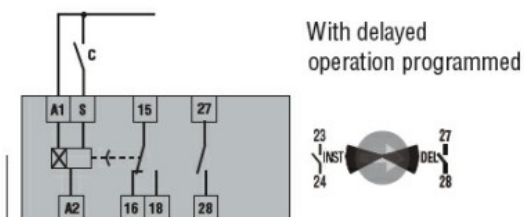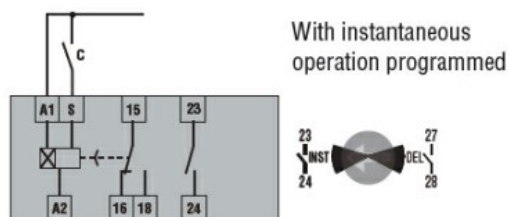

Certifications and compliance

Compliance

CSA C22.2 n°14
IEC/EN 61812-1
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001439 -
Timer relay