



Auxiliary contact characteristics

Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	4

Operational characteristics

IEC maximum current (I_{max})	A	63
-----------------------------------	---	----

Mechanical features


Tightening torque for terminals	min	Nm	2.5
	max	Nm	3

Conductor section	AWG/Kcmil	min	10
		max	4

Flexible c/w lug conductor section	min	mm ²	4
	max	mm ²	25

Terminals	tool	Ph2
Weight	g	48

Dimensions

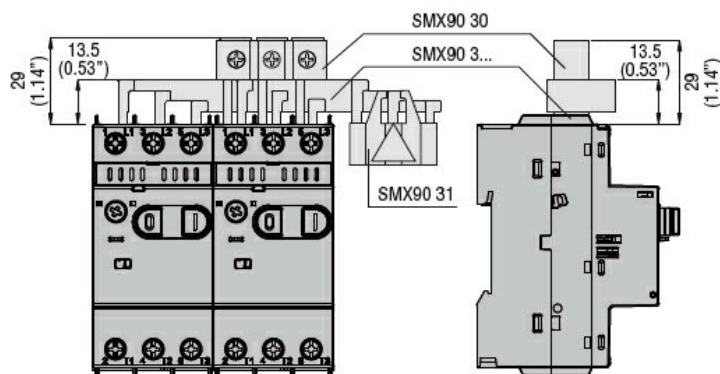

Certifications and compliance

Compliance	IEC/EN 60947-1
	IEC/EN 60947-5-1

Certificates	EAC
--------------	-----

ETIM classification