



**Contact characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	250
Rated impulse withstand voltage $U_{imp}$	kV	4


**Mechanical features**

Max socket terminal tightening torque	Nm	0.6Nm
Socket screw tightening tool (cross / flat blade)		Phillips 1/4.5mm

Conductor section				
	AWG/Kcmil			
		min		20
		max		14
	IEC			
		min	mm <sup>2</sup>	0.5
		max	mm <sup>2</sup>	2.5


Fixing	On 35mm DIN rail and with screw
--------	---------------------------------

**Dimensions**

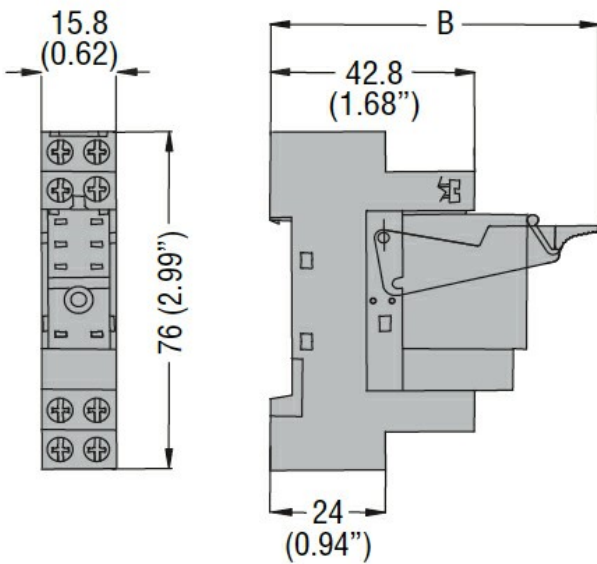

B: 72.5mm (2.85") con HR3X88  
82.5mm (3.25) con XR5X88

**Wiring diagrams**

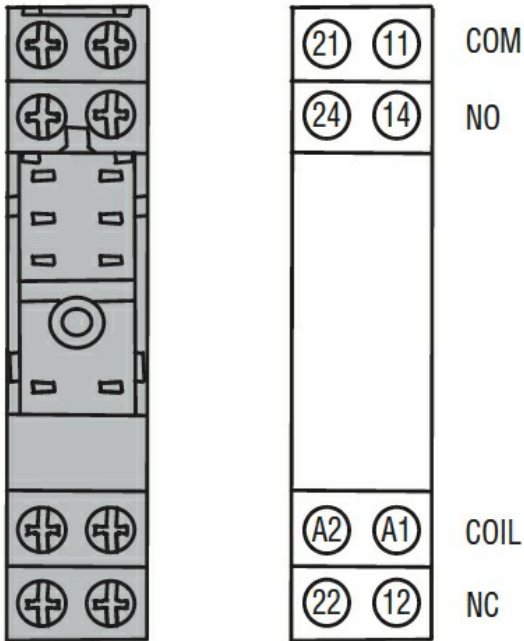

**Certifications and compliance**

Compliance

IEC/EN 61810

Certificates

CSA

cULus

cURus

EAC

**ETIM classification**

ETIM 8.0

EC001456 -  
Relay socket