

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: CHANGED SR TO PVC. UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN

(2X .463
[11.75]
MIN.)

2X MOLDED HOOD
ABS, BLACK

2X STRAIN RELIEF
PVC, BLACK

LATCHES

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 24AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, BLACK

"P1"

PIN 1

"P2"

PIN 1


2X USB SERIES "A"
LATCHING PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

2X NO LOGO

"P1"

WIRING DIAGRAM

"P2"

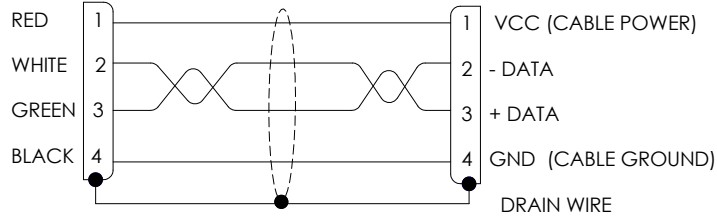

MODEL NUMBER	LENGTH METERS [FEET]
CAUALAL-03M	0.3 [.98]
CAUALAL-05M	0.5 [1.64]
CAUALAL-075M	0.75 [2.46]
CAUALAL-1M	1.0 [3.28]
CAUALAL-2M	2.0 [6.56]
CAUALAL-3M	3.0 [9.84]
CAUALAL-4M	4.0 [13.12]
CAUALAL-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.27] .XXX = ±.005 [1.27] PROJECTION 	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY M.MARTINEZ APPROVED BY S.SMITH	DATE 10/23/09 10/23/09 10/23/09	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY USB PRODUCT DESCRIPTION CBL,USB A/A LATCHING BLK SIZE A FSCM NO. 43321 DWG. NO. CAUALAL REV. E	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE CAD FILE: CAUALAL.SLDDRW	
	COLOR VARIATIONS MAY OCCUR		SHEET 1 OF 1	