

ACCLIMATE™

IP67 SEALED USB-C PANEL MOUNT

BCU/BPCU/BRU SERIES

BCU
Mates with:
BPCU, BRU

BPCU
Mates with:
BCU

BRU
Mates with:
BCU

SPECIFICATIONS

Overmold & Inner Mold:
PVC, Black (BCU)

Lock Nut:
Thermoplastic, Black (BCU)

Rubber Pad:
Silicone, Black (BCU)


Housing Material:
Thermoplastic, Black
(BPCU, BRU)

Gasket Material:
Silicone, Black
(BPCU, BRU)


Hex Nut:
Thermoplastic, Black
(BPCU, BRU)

Operating Temp Range:
-40 °C to +85 °C

BCU	END 1	PLATING OPTION	ASSEMBLED LENGTH	END 2 OPTION	STYLE
	-C = Sealed Type C Plug	-S = 30 μ" (0.76 μm) Gold	-0.50 = .5 meter -1.00 = 1 meter -2.00 = 2 meters Standard Lengths	-UC = Unsealed Type C Plug -SC = Sealed Type C Plug -BC = Blunt Cut	-P = Plastic

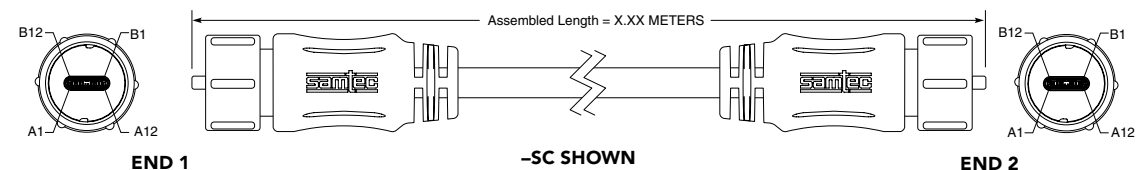


BPCU	END 1	PLATING OPTION	ASSEMBLED LENGTH	END 2 OPTION	STYLE
	-C = Sealed Type C Receptacle	-S = 30 μ" (0.76 μm) Gold	-0.25 = .25 meter -0.50 = .5 meter -0.75 = .75 meter -1.00 = 1 meter Standard Lengths	-UC = Unsealed Type C Plug -BC = Blunt Cut	-P = Plastic

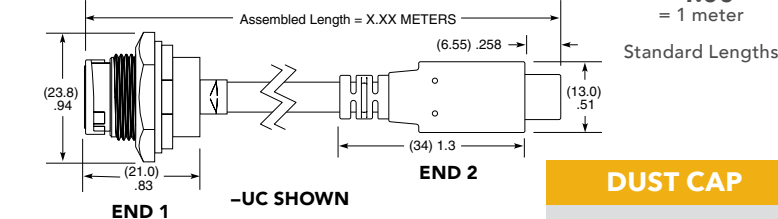


DUST CAP

DCA-BRU-C-01

PANEL OPENING



BRU	C	PLATING OPTION	LEAD STYLE	STYLE
		-S = 30 μ" (0.76 μm) Gold	-VT = Vertical -RA = Right-angle	-P = Plastic

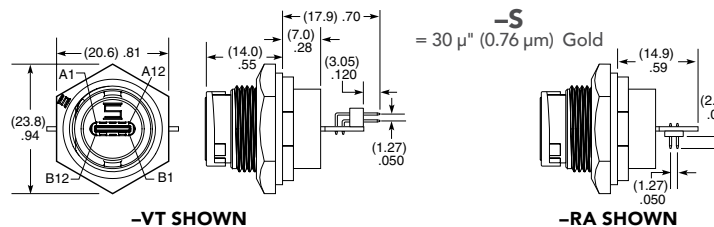

Note:
Some lengths, styles and
options are non-standard,
non-returnable

samtec.com?BCU, samtec.com?BPCU or samtec.com?BRU

F-226 WEB

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.