

EHCSA

Conductive polymer hybrid aluminum electrolytic surface mount capacitor



Photo is representative

Product features

- AEC-Q200
- High ripple current
- Low ESR and low leakage current
- Endurance with ripple current: 2,000/4,000 hours at +135 °C
- Wide variety of voltage options
- Surface mount package with multiple size options
- Moisture sensitivity level (MSL): 1

Applications

- LED headlights
- On-board charger (OBC)
- Battery management systems (BMS)
- ADAS
- 48 V systems
- Engine control unit (ECU)
- Electronic power system (EPS)

Environmental compliance and general specifications


- Storage temperature range (component): -55 °C to +135 °C
- Operating temperature range: -55 °C to +135 °C




Part number system

EHC	S	A	035	M	331	1010	T
Family	Type	Grade	Voltage (V)	Tolerance	Capacitance (µF)	Size code	Package code
EHC	S = SMD	A = automotive	025 = 25 035 = 35 050 = 50 063 = 63	M = ±20%	First two digits= capacitance value, third digit = number of zeros example: 331 = 330 µF	Refer to size code table	T= Tape and reel, 15" diameter reel

Dimensions-mm

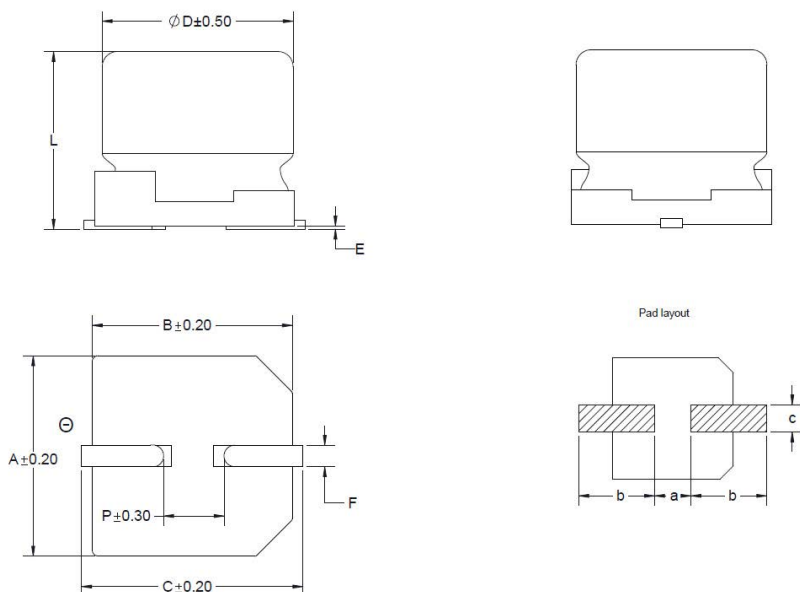

Part marking

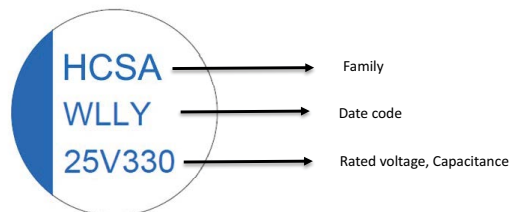

Size code table

Size code	Dimension - mm									Pad layout - mm		
	Diameter	L	L tolerance	A	B	C	F	E	P	a ref	b ref	c ref
0606	6.3	6.0	±0.2	6.6	6.6	7.3	0.5 to 0.8	0.3 maximum	2.1	2.1	3.5	1.6
0608	6.3	7.5	±0.5	6.6	6.6	7.3	0.5 to 0.8	0.3 maximum	2.1	2.1	3.5	1.6
0810	8.0	10.2	±0.3	8.3	8.3	9.0	0.8 to 1.1	0.3 maximum	2.9	2.8	4.2	1.9
1010	10	10.2	±0.3	10.3	10.3	11	0.8 to 1.1	0.3 maximum	4.6	4.3	4.4	1.9
1012	10	12.3	±0.2	10.3	10.3	11	0.8 to 1.1	0.3 maximum	4.6	4.3	4.4	1.9
1016	10	16.5	±0.3	10.3	10.3	11	0.8 to 1.1	0.3 maximum	4.6	4.3	4.4	1.9

All soldering surfaces to be coplanar within 0.1 millimeters

Rating and part number

Rated voltage (Vdc)	Surge voltage (Vdc)	Capacitance ¹ @ 120 Hz (μF)	Leakage current ¹ (μA)	Dissipation factor ¹ (tanδ) @ 120 Hz	ESR ¹ @ 100 kHz (mΩ)	Ripple current @ 100 kHz, +135 °C (A)	Size code	Part number
25	31.3	56	14	0.14	50	0.90	0606	EHCSA025M5600606T
		100	25	0.14	30	1.40	0608	EHCSA025M1010608T
		150	37.5	0.14	22	1.8	0810	EHCSA025M1510810T
		220	55	0.14	22	1.8	0810	EHCSA025M2210810T
		270	67.5	0.14	20	2.2	1010	EHCSA025M2711010T
		330	82.5	0.14	20	2.2	1010	EHCSA025M3311010T
		470	117.5	0.14	16	2.5	1012	EHCSA025M4711012T
		560	140	0.14	20	2.2	1010	EHCSA025M5611010T
		560	140	0.14	15	2.9	1016	EHCSA025M5611016T
		680	170	0.14	16	2.5	1012	EHCSA025M6811012T
		820	205	0.14	11	4.0	1016	EHCSA025M8211016T
		1000	250	0.14	11	4.0	1016	EHCSA025M1021016T
35	43.8	47	16.5	0.12	60	0.90	0606	EHCSA035M4700606T
		68	23.8	0.12	35	1.4	0608	EHCSA035M6800608T
		100	35	0.12	22	1.8	0810	EHCSA035M1010810T
		150	52.5	0.12	22	1.8	0810	EHCSA035M1510810T
		150	52.5	0.12	20	2.2	1010	EHCSA035M1511010T
		220	77	0.12	20	2.2	1010	EHCSA035M2211010T
		220	77	0.12	16	2.5	1012	EHCSA035M2211012T
		270	94.5	0.12	20	2.2	1010	EHCSA035M2711010T
		330	115.5	0.12	16	2.5	1012	EHCSA035M3311012T
		470	164.5	0.12	15	2.9	1016	EHCSA035M4711016T
50	62.5	22	11.0	0.10	80	0.75	0606	EHCSA050M2200606T
		33	16.5	0.10	40	1.10	0608	EHCSA050M3300608T
		47	23.5	0.10	24	1.50	0810	EHCSA050M4700810T
		68	34.0	0.10	24	1.50	0810	EHCSA050M6800810T
		100	50.0	0.10	22	1.80	1010	EHCSA050M1011010T
		120	60.0	0.10	22	1.80	1010	EHCSA050M1211010T
		150	75.0	0.10	18	2.00	1012	EHCSA050M1511012T
		180	90.0	0.10	16	2.50	1012	EHCSA050M1811012T
		220	110.0	0.10	13	3.80	1016	EHCSA050M2211016T
		270	135.0	0.10	13	3.80	1016	EHCSA050M2711016T
63	78.8	10	6.3	0.08	120	0.70	0606	EHCSA063M1000606T
		22	13.9	0.08	80	0.90	0608	EHCSA063M2200608T
		33	20.8	0.08	24	1.50	0810	EHCSA063M3300810T
		47	29.6	0.08	24	1.50	0810	EHCSA063M4700810T
		56	35.3	0.08	22	1.80	1010	EHCSA063M5601010T
		68	42.8	0.08	22	1.80	1010	EHCSA063M6801010T
		82	51.7	0.08	22	1.80	1010	EHCSA063M8201010T
		100	63.0	0.08	18	2.20	1012	EHCSA063M1011012T
		120	75.6	0.08	18	2.20	1012	EHCSA063M1211012T
		150	94.5	0.08	16	2.50	1016	EHCSA063M1511016T
180	113.4	0.08	16	2.50	1016	EHCSA063M1811016T		

1. +20 °C ±2 °C.

Frequency coefficient of rated ripple current

Frequency	120 Hz	1 kHz	10 kHz	50 kHz	100 kHz to 300 kHz
Coefficient	0.05	0.30	0.70	0.85	1.0

Impedance at low temperature

Impedance ratio	Performance
$Z(-55\text{ °C}) / Z(+20\text{ °C})$	≤ 2.0
$Z(-40\text{ °C}) / Z(+20\text{ °C})$	≤ 1.5

Impedance at 100 kHz at $-55\text{ °C} \pm 3\text{ °C}$ or $-40\text{ °C} \pm 2\text{ °C}$

Endurance

Characteristics	Performance
Appearance	No significant damage
Capacitance	$\leq \pm 30\%$ of the initial value
Dissipation factor $\tan\delta$	$\leq 200\%$ of the initial specified value
ESR	$\leq 200\%$ of the initial specified value
Leakage current	\leq the initial specified value

+ 135 °C, size 0606/0608 (2000 hours), size 0810/1010/1012/1016 (4000 hours), apply the rated ripple current without exceeding the rated voltage

Storage condition and shelf life

The minimum shelf life is two (2) years from date code manufactured provided product is maintained in its original packaging and stored in a controlled environment under the conditions of $+15$ to $+35\text{ °C}$ / $< 75\%$ relative humidity.

A capacitor left for a long period is prone to have a greater flow of leak current. This happens because the oxide film deteriorates under a no-load condition. Voltage application to the capacitor reduces the leak current.

However, at the start of voltage application, a large flow of film recovery current increases the leak current, which may cause a circuit failure, etc.

Avoid the following storage environmental conditions:


- Environments resulting in water adhesion, high temperatures, high humidity, and condensation.
- Environments resulting in oil adhesion or environments filled with oil components in a gaseous state.
- Environments resulting in saltwater adhesion or environments filled with salt.
- Environments filled with acidic toxic gases (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine, methyl bromide, etc.).
- Environments filled with ammonia or other alkaline toxic gases.
- Environments exposed to acids or alkaline solvents.
- Environments exposed to direct sunlight, ozone, UV light, or radiation.
- Conditions related to vibration and shock.

Packaging information (mm)

Drawing not to scale

Supplied in tape and reel packaging, 1200 parts for 0606 per 15" (381mm) diameter reel

Supplied in tape and reel packaging, 500 parts for 0810 per 15" (381mm) diameter reel

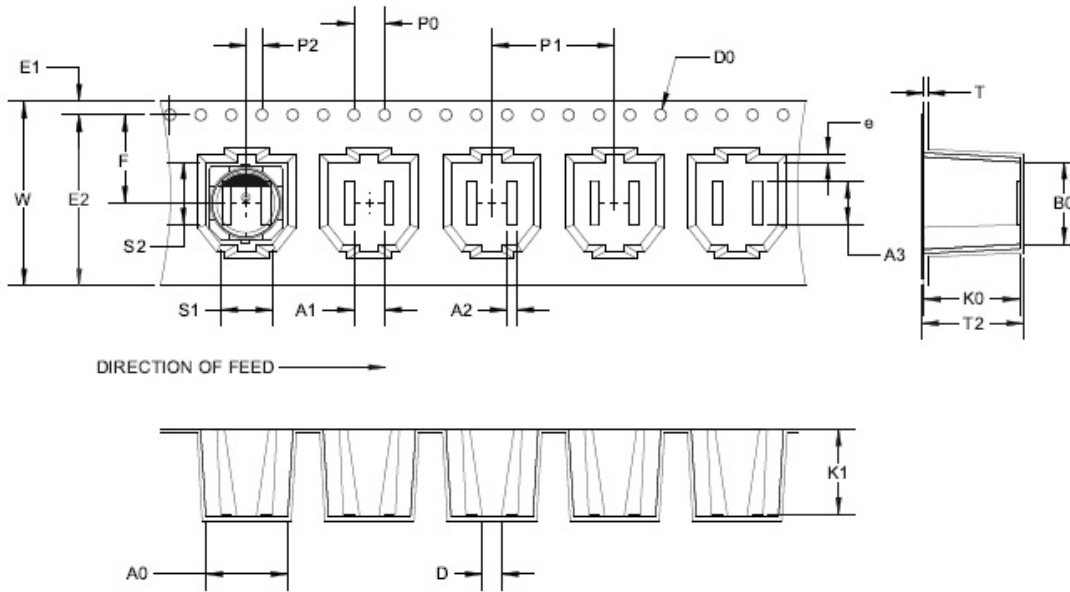

Size Code	0606	0810
Dimension	Value	Value
W±0.30	16.00	24.00
F	7.50 ±0.15	11.50 ±0.10
E1	1.75 ±0.15	1.75 ±0.10
E2 Min.	14.25	22.30
P0	4.00 ±0.05	4.00 ±0.10
P1±0.10	12.00	16.00
P2	2.00 ±0.05	2.00 ±0.10
D0	1.50 +0.10/-0	1.50 +0.15/-0
D±0.10	1.60	2.00
A0±0.10	7.00	8.65
B0±0.10	7.00	8.65
K0±0.10	6.50	10.50
K1±0.05	6.25	10.36
T±0.05	0.40	0.50
T2 Max.	7.07	11.21
e±0.10	0.60	0.50
S1±0.10	4.30	4.80
S2±0.10	5.20	7.30
A1±0.10	2.50	4.00
A2±0.10	0.80	1.00
A3±0.10	3.50	4.40


Packaging information (mm)

Drawing not to scale

Supplied in tape and reel packaging, 900 parts for 0608 per 15" (381mm) diameter reel

Supplied in tape and reel packaging, 500 parts for 1010 per 15" (381mm) diameter reel

Supplied in tape and reel packaging, 450 parts for 1012 per 15" (381mm) diameter reel

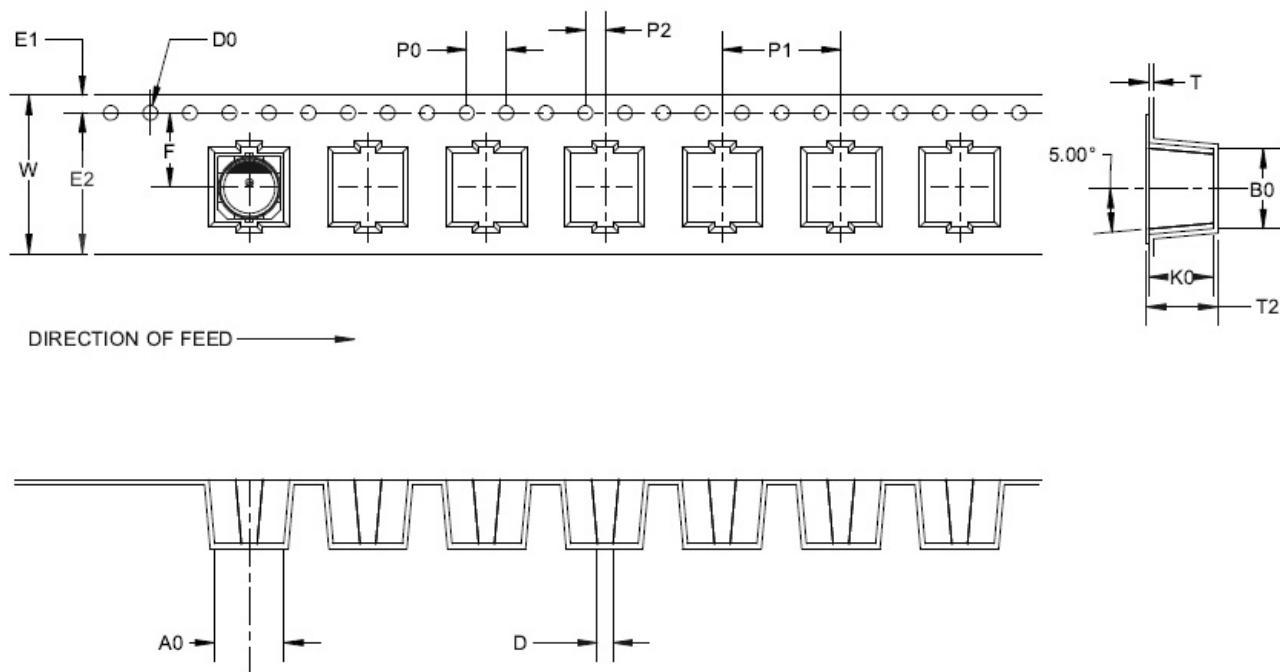


Size Code	0608	1010	1012
Dimension	Value	Value	Value
W±0.30	16.00	24.00	24.00
F±0.10	7.50	11.50	11.50
E1±0.10	1.75	1.75	1.75
E2 Min.	14.25	22.25	22.25
P0±0.10	4.00	4.00	4.00
P1±0.10	12.00	16.00	16.00
P2±0.10	2.00	2.00	2.00
D0+0.10/-0	1.50	1.50	1.50
D±0.10	1.60	1.60	1.60
A0±0.10	7.00	10.70	10.70
B0±0.10	7.00	10.70	10.70
K0	8.20±0.10	11.00±0.10	13.00±0.10
T±0.05	0.50	0.50	0.50
T2 Max.	8.87	11.67	13.67


Packaging information (mm)

Drawing not to scale

Supplied in tape and reel packaging, 200 parts for 1016 per 15" (381 mm.) diameter reel

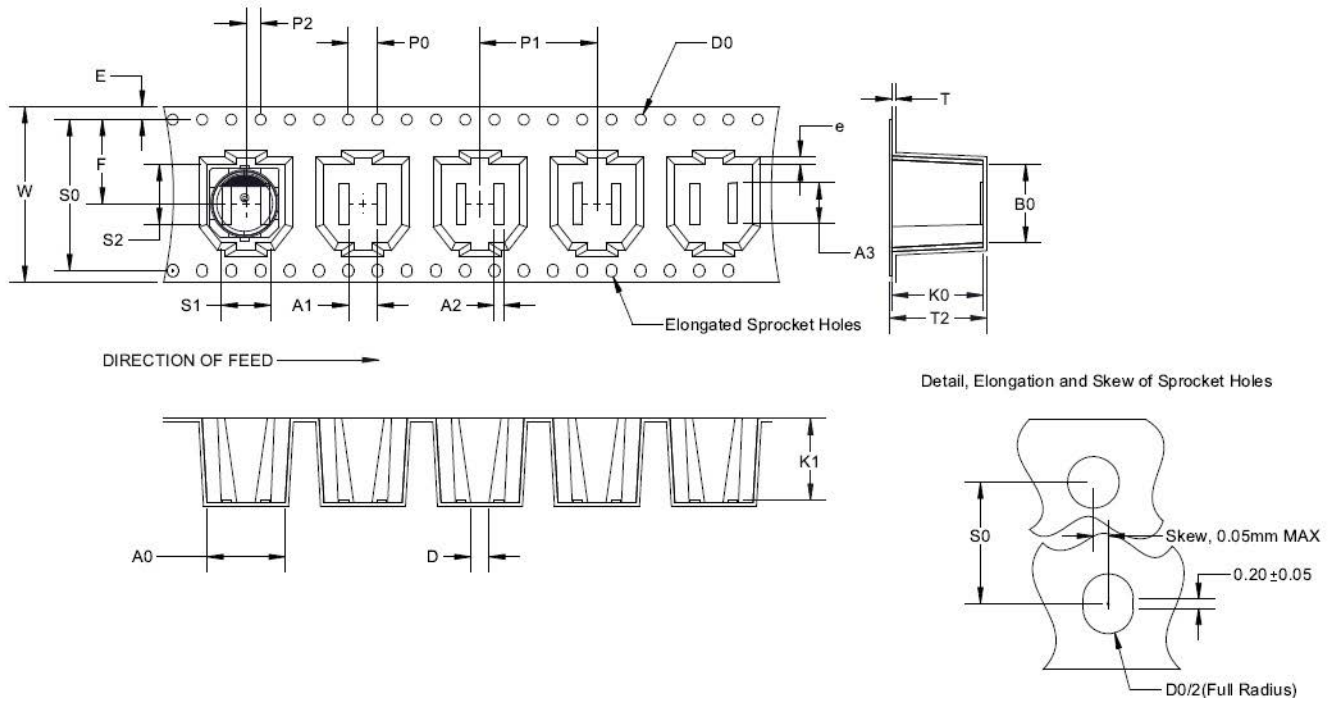

Size Code	1016
Dimension	Value
W±0.30	32.00
F±0.10	14.25
E±0.10	1.75
P0±0.10	4.00
P1±0.10	24.00
P2±0.10	2.00
D0+0.10/-0	1.50
D±0.10	1.60
A0±0.10	10.50
B0±0.10	10.50
K0±0.10	16.95
K1±0.05	16.85
T±0.05	0.50
T2 Max.	17.62
e±0.10	0.60
S0±0.10	28.40
S1±0.10	7.30
S2±0.10	8.70
A1±0.10	4.00
A2±0.10	1.00
A3±0.10	5.40

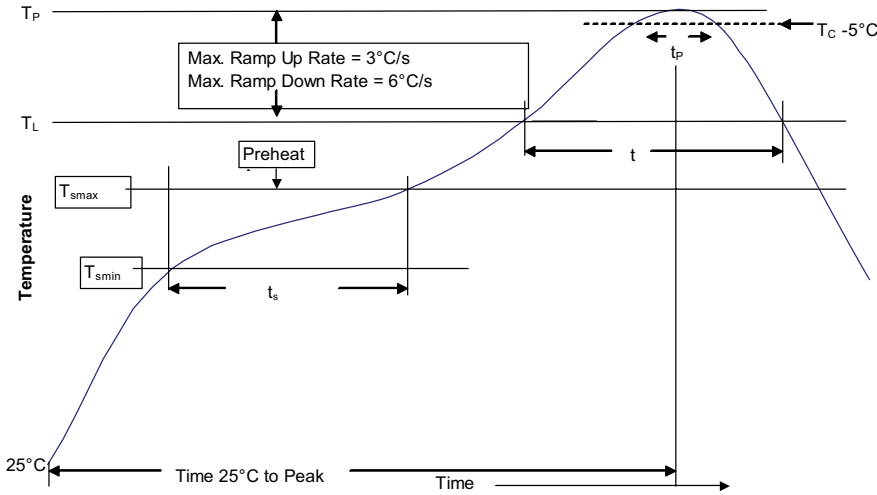

Profile feature

Preheat and soak	<ul style="list-style-type: none"> • Temperature minimum (T_{smin}) • Temperature maximum (T_{smax}) • Time (T_{smin} to T_{smax}) (t_s) 	<p>150 °C</p> <p>200 °C</p> <p>60 to 120 seconds</p>
Ramp up rate T_L to T_p		3 °C/ second maximum
Liquidous temperature (T_L) Time (t_L) maintained above T_L		217 °C 60 to 150 seconds
Peak package body temperature (T_p)		260 °C
Time (t_p)* within 5 °C of the specified classification temperature (T_C)		10 seconds
Ramp-down rate (T_p to T_L)		6 °C/ second maximum

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Manual solder

+350 °C, 20 Watt soldering iron, 4 to 5 seconds maximum with tip diameter of 1.0 mm maximum, generally manual, hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
 Eaton.com/electronics

© 2026 Eaton
 All Rights Reserved
 Printed in USA
 Publication No. ELX1547 BU-ELX22450
 Published February 2026

Eaton is a registered trademark.
 All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

