

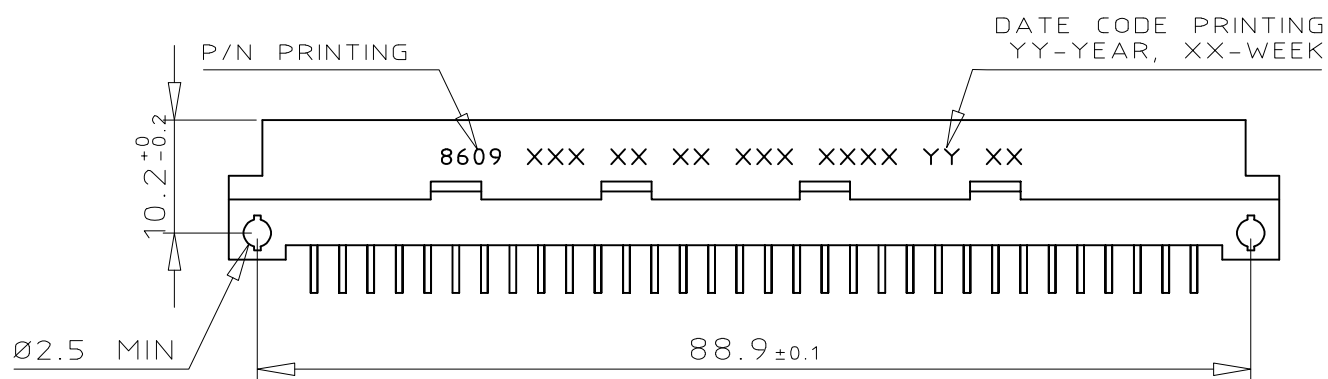
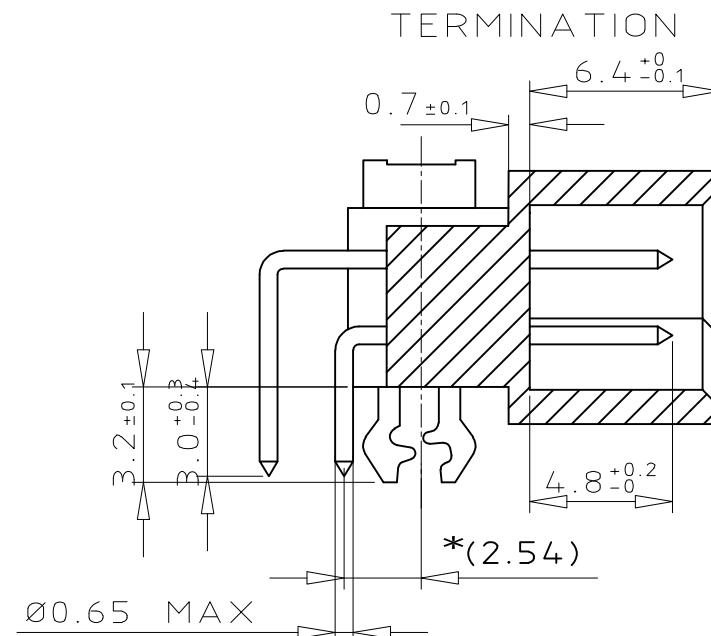


# DIMENSIONS

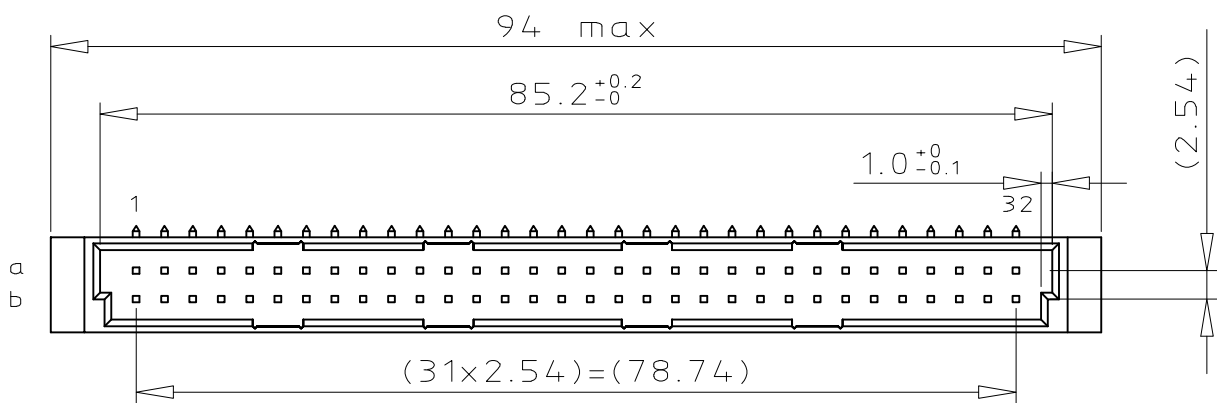


\*Foot print dimension (2.54) will be controlled by attribute grid suitability based on the recommended PCB layout.

## ORDERING INFORMATION

SERIES	8609	2	64	5	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a										
ROW b										
NO. OF CONTACTS										
TYPE OF INSULATOR										
2 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE B										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

## PCB LAYOUT

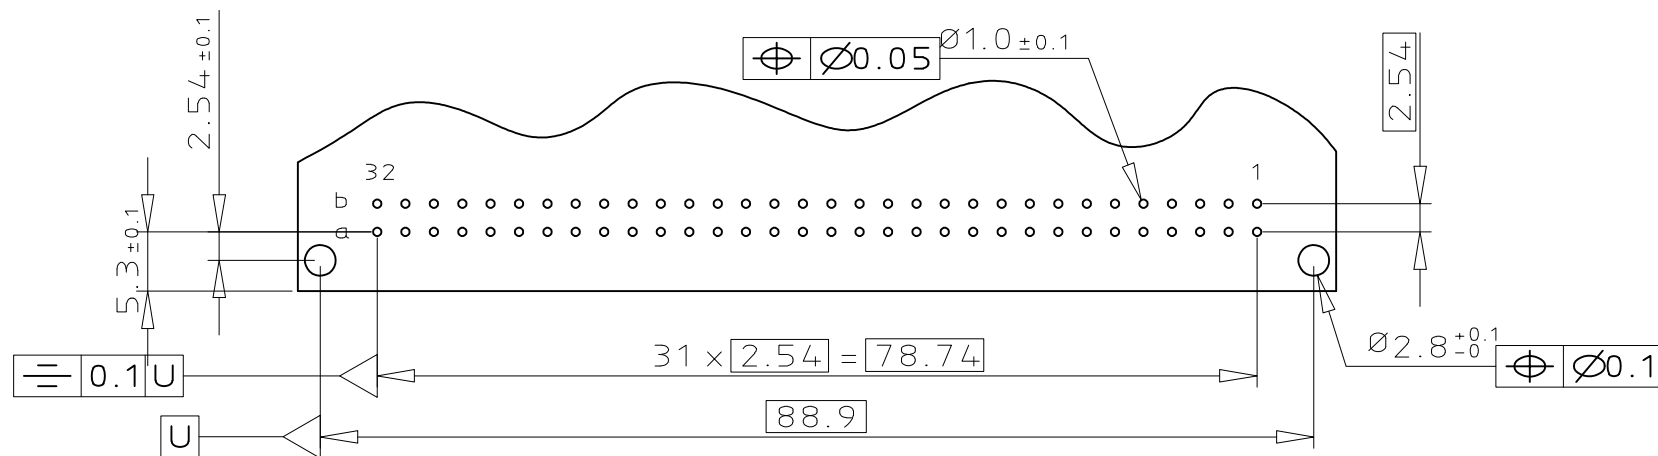

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code		surface		tolerance		projection		product family	
SEE DWG C-8609-0000A		ISO 1302 ✓		ISO 406 ISO 1101		mm		8609	
ltr		ecn no		dr		date		title	
A		104-0063		MINI		2004-09-17		DIN STANDARD HEADER	
B		105-0089		MINI		2005-05-19		ANGLED SPILL DIN 41612 STYLE B	
C		106-0061		MINI		2006-05-31		scale 3:2	
D		106-0164		MINI		2006-08-31		dwg no	
E		108-0146		KR		2008-10-21		sheet 1 of 1	
F		ELX-I-14289		MJA		2013-03-19		size	
G		ELX-I-40953		MJA		2021-05-19		A3	
sheet index		revision		G				type Product Customer Drawing	
1		sheet		1					