

# Solid-State Relays

## SRP1-CC Series



### Description

The SRP1-CC series of solid-state relays (SSRs) offers a dependable solution for DC output applications. Designed to meet industry standards, the Littelfuse SRP1-CC series provides consistent performance for everyday use. With a broad voltage range and practical design, these relays are suitable for a variety of applications, from industrial automation to renewable energy systems.

- **Reliable Operation:** The SRP1-CC series ensures stable performance, making it a solid choice for standard DC output needs.
- **IP20 Removable Protection:** The IP20-rated design ensures protection against dust and accidental contact. Easily remove the cover for maintenance or adjustments.

### Features & Benefits

| FEATURES                                                              | BENEFITS                                                                                                                                          |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MOSFET Technology</b>                                              | Provides efficient switching with low power dissipation and high overcurrent capability, ensuring reliable performance in demanding applications. |
| <b>Compliance with International Standards (cRUus, VDE, CE, UKCA)</b> | Ensures that the Solid-State Relay (SSR) has undergone rigorous testing, providing enhanced safety and product quality.                           |
| <b>Efficient Design with High Quality</b>                             | Balances cost-effectiveness with reliable performance, making it an ideal choice for budget-conscious projects                                    |

### Applications

- DC heaters
- Solenoid valves
- Fans and electric motors
- Battery connection/disconnection
- Packaging machinery
- Medical & test equipment

# Solid-State Relays

## SRP1-CC Series

### Ordering Information

| FOR HEATING CONTROL |                    |                |                        |                               |                     |            |
|---------------------|--------------------|----------------|------------------------|-------------------------------|---------------------|------------|
| CATALOG NUMBER      | OUTPUT MAX CURRENT | OUTPUT VOLTAGE | OUTPUT SWITCHING STYLE | OUTPUT OVERVOLTAGE PROTECTION | INPUT VOLTAGE RANGE | COMPLIANCE |
| SRP1-CCDDV-020NC-N  | 20A                | 100 VDC        | DC                     | -                             | 4-32 V DC           | cRUus, CE  |
| SRP1-CCDDL-020NC-N  | 20A                | 200 VDC        | DC                     | -                             | 4-32 V DC           | cRUus, CE  |
| SRP1-CCDDV-040NC-N  | 40A                | 100 VDC        | DC                     | -                             | 4-32 V DC           | cRUus, CE  |
| SRP1-CCDDL-040NC-N  | 40A                | 200 VDC        | DC                     | -                             | 4-32 V DC           | cRUus, CE  |

### Input/Control Specifications<sup>1</sup>


| GENERAL DATA |                                                             |         |                   |      |
|--------------|-------------------------------------------------------------|---------|-------------------|------|
| SYMBOL       | PARAMETER                                                   | RANGE   | VALUE             | UNIT |
| Uc           | Input (Control) Voltage*                                    | Maximum | 32                | V DC |
|              |                                                             | Nominal | 12-24             | V DC |
|              |                                                             | Minimum | 3,5               | V DC |
| Urv          | Reverse Voltage                                             | Maximum | -32               | V DC |
| Uc on        | Turn-On Voltage<br>(Pick-up/Engage/Activation Voltage)      | Minimum | 3,5               | V DC |
| Uc off       | Turn-Off Voltage<br>(Drop Out/Release Deactivation Voltage) | Nominal | 1,0               | V DC |
| Ic           | Input (Control) Current                                     | Maximum | 35                | mA   |
|              |                                                             | Minimum | 32                | mA   |
| -            | Input Impedance                                             | Nominal | Current Regulated | -    |
| Ton          | Turn-On Time                                                | Maximum | 40                | μs   |
| Toff         | Turn-Off Time                                               | Maximum | 40                | μs   |

\*Increase Min voltage by 1V for operations from -20 to -40°C.

### Input Current vs Input Voltage Graphs (For Power Supply Selection)

To ensure the Solid-State Relay (SSR) operates efficiently and reliably, it is essential to understand the relationship between input voltage and input current. The following input current graphs provide detailed information on the current consumption of our SSRs across the specified input voltage range (4-32 VDC). This data is crucial for selecting an appropriate power supply and ensuring the relay functions within its safe operating limits. Proper understanding of current consumption is vital for the optimal performance of your application.

#### 4-32 VDC Input

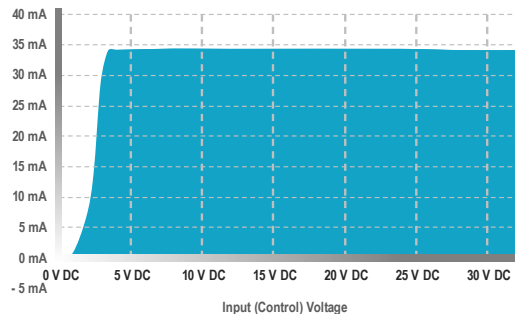

# Solid-State Relays

## SRP1-CC Series

### Output/Load Specifications<sup>1</sup>

| GENERAL DATA |                                                                |                          |                               |                               |                               |                               |                               |       |
|--------------|----------------------------------------------------------------|--------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------|
| SYMBOL       | PARAMETER                                                      | CONDITION                | RANGE                         | VALUE FOR 20A / 100V VERSIONS | VALUE FOR 20A / 200V VERSIONS | VALUE FOR 40A / 100V VERSIONS | VALUE FOR 40A / 200V VERSIONS | UNIT  |
| -            | Output Configuration                                           | -                        | -                             | SPST-NO                       | SPST-NO                       | SPST-NO                       | SPST-NO                       | -     |
| f            | Operating Frequency                                            | -                        | Minimum<br>Nominal<br>Maximum | -<br>-<br>>1000               | -<br>-<br>>1000               | -<br>-<br>>1000               | -<br>-<br>>1000               | Hz    |
| Ue           | Recommended Operating Voltage                                  | 47-63Hz                  | Minimum<br>Nominal<br>Maximum | 5<br>48<br>60                 | 5<br>90<br>110                | 5<br>48<br>60                 | 5<br>90<br>110                | V DC  |
| Utp          | Absolute Maximum Rating (Non-repetitive peak voltage)          | 47-63Hz                  | Minimum                       | 100                           | 200                           | 100                           | 200                           | V DC  |
| -Ut          | Reverse voltage drop (Internal diode at OFF state)             | Ie=50A / 80A / 56A, Uc=0 | Nominal                       | 1,3                           | 1,5                           | 1,3                           | 1,5                           | V     |
| PWM          | Pulse Width Modulation (PWM) Frequency                         | -                        | Maximum*                      | 1000                          | 1000                          | 1000                          | 1000                          | Hz    |
| V            | On-State Voltage Drop                                          | At Rated Current         | Maximum                       | 0,88                          | 0,97                          | 1,05                          | 1,93                          | Vrms  |
| RDS-ON       | On-State Dynamic Resistance                                    | -                        | Maximum                       | 56                            | 90                            | 30                            | 46                            | mΩ    |
| Ipeak        | Transient Over-Current (Surge/Overload/Non-Repetitive Current) | t= 0,1ms                 | Nominal                       | 200                           | 160                           | 320                           | 380                           | Apk   |
| Iik          | Leakage Current (Off-State)                                    | At Umax, Tjmax           | Maximum                       | 3                             | 3                             | 3                             | 3                             | mArms |
| Rthj/c       | Thermal Resistance Junction to Case (Rjc)                      | -                        | Maximum                       | 1,4                           | 1,2                           | 0,9                           | 0,7                           | °C/W  |

\*For high frequency, take 2 x Ie to calculate the heatsink; the protections must be chosen carefully.

Littelfuse SSRs are designed for various DC applications and can manage specific load types effectively. The maximum continuous current value provided in this datasheet applies to non-inductive or slightly inductive loads (DC-1 type), such as DC heating elements, or small solenoids.

| SYMBOL    | PARAMETER                                                                       | CONDITION | RANGE               | VALUE FOR 20A / 100V VERSIONS | VALUE FOR 20A / 200V VERSIONS | VALUE FOR 40A / 100V VERSIONS | VALUE FOR 40A / 200V VERSIONS | UNIT         |
|-----------|---------------------------------------------------------------------------------|-----------|---------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------|
| Ie (DC-1) | Load Current (Continuous)<br>– Non-inductive or slightly inductive loads (DC-1) | At 40 °C  | Maximum*<br>Minimum | 20<br>0,005                   | 20<br>0,005                   | 40<br>0,005                   | 40<br>0,005                   | A DC<br>A DC |

\*Heat sinking required, see derating curves.


# Solid-State Relays

## SRP1-CC Series

### Thermal Derating Curves (For Heatsink Selection)


To operate the Solid-State Relay (SSR) at its specified ratings, the use of a heatsink is mandatory. The following thermal derating curves illustrate the maximum load current that our SSRs can manage under varying ambient temperatures and heatsink sizes. It is crucial to select a heatsink that is most suitable for your specific application.

#### 20A | 100V Versions

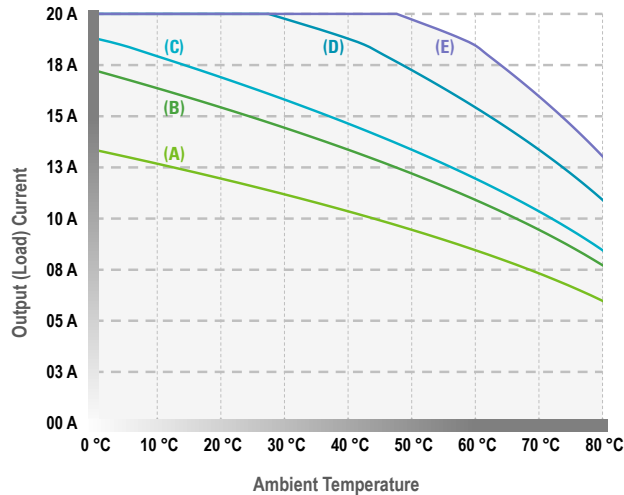


(A) No Heatsink (B) 6.0 °C/W: Heatsink (C) 5.0 °C/W: Heatsink (D) 3.0 °C/W: Heatsink (E) 2.1 °C/W: Heatsink

#### 20A | 200V Versions

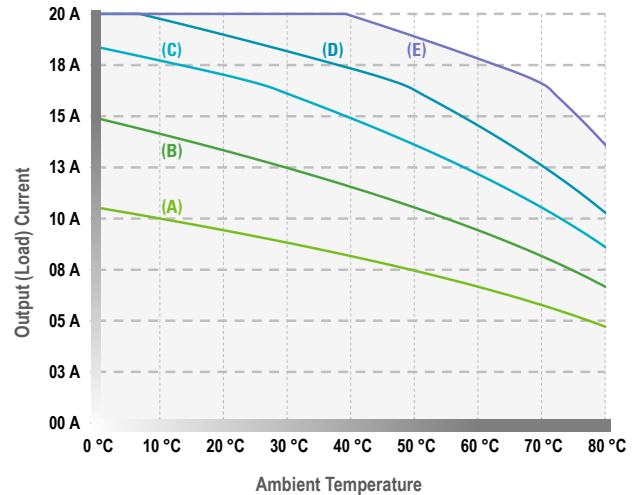


(A) 10 °C/W: Heatsink (B) 5.0 °C/W: Heatsink (C) 3.0 °C/W: Heatsink (D) 2.1 °C/W: Heatsink (E) 3.0 °C/W: Heatsink

#### 40A | 100V Versions

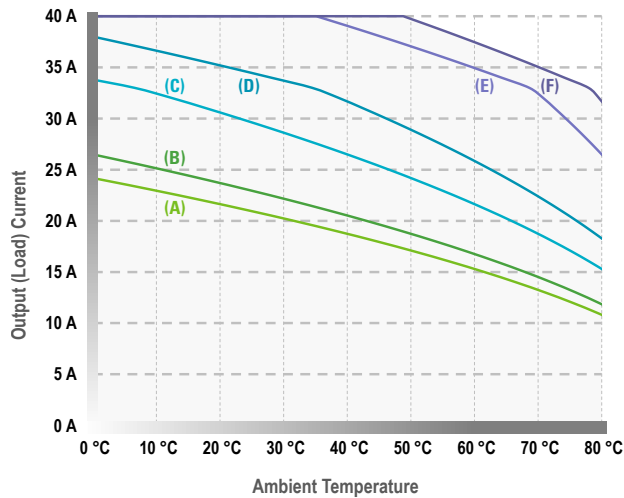

(A) 6.0 °C/W: Heatsink (B) 5.0 °C/W: Heatsink (C) 3.0 °C/W: Heatsink (D) 2.1 °C/W: Heatsink (E) 1.0 °C/W: Heatsink (F) 0.7 °C/W: Heatsink

#### 40A | 200V Versions

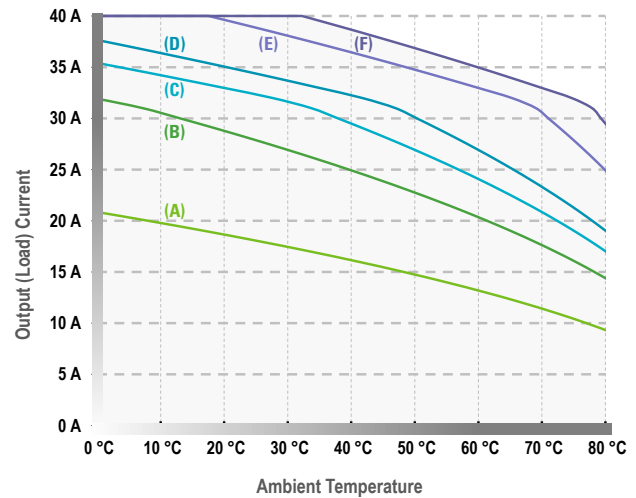

(A) 5.0 °C/W: Heatsink (B) 2.1 °C/W: Heatsink (C) 1.5 °C/W: Heatsink (D) 1.2 °C/W: Heatsink (E) 0.7 °C/W: Heatsink (F) 0.5 °C/W: Heatsink

### Considerations – Switching Type

DC output SSRs are versatile and can be used to control various types of loads, including resistive loads such as heating elements, and inductive loads like DC motors and valves. This flexibility makes them suitable for a wide range of industrial and commercial applications.

# Solid-State Relays

## SRP1-CC Series

### Considerations – Inrush Current

When dealing with DC loads, it's important to consider the inrush current, especially for inductive loads such as motors and valves:

- DC motors and valves can generate inrush currents that are 3-4 times their steady-state current. To accommodate this, it is recommended to select an SSR with a current rating 3-4 times the nominal current of the load, or to operate the SSR at 25%-35% of its maximum capacity to help manage these high currents and protect the relay and other components.
- For DC resistive loads, inrush current is generally less of a concern compared to inductive loads. However, it's still prudent to account for any potential surges, especially if the load includes capacitive elements. Ensuring the SSR operates within 80%-90% of its maximum capacity can enhance reliability and lifespan.


| NOMINAL SSR CURRENT RATING | MAXIMUM RECOMMENDED CURRENT RESISTIVE LOADS | MAXIMUM RECOMMENDED CURRENT INDUCTIVE LOADS |
|----------------------------|---------------------------------------------|---------------------------------------------|
| 20 A                       | 16-18 A                                     | 6-10 A                                      |
| 40 A                       | 32-36 A                                     | 12-20 A                                     |

### Output Surge Current Withstand Graphs (For Transient Protection)

To ensure the Solid-State Relay (SSR) can handle sudden increases in current without damage, it is essential to understand its surge current capacity. The following surge current graphs illustrate the maximum surge current that our SSRs can withstand over various durations. This information is crucial for selecting an SSR that can endure transient overcurrent events, ensuring the reliability and safety of your electrical system. Proper understanding of surge current capacity helps in preventing equipment failure and maintaining optimal performance in your application.


The graphs include a Single Pulse Surge Current curve used to define the protection offered by fuses, helping in the selection of appropriate protective devices. Additionally, it is important to ensure that the Repetitive Surge Current curve is not exceeded during normal operation, as frequent overload currents can decrease the life expectancy of the SSR. Therefore, caution is advised to maintain the longevity and reliability of the SSR.

#### 20A | 100V Versions

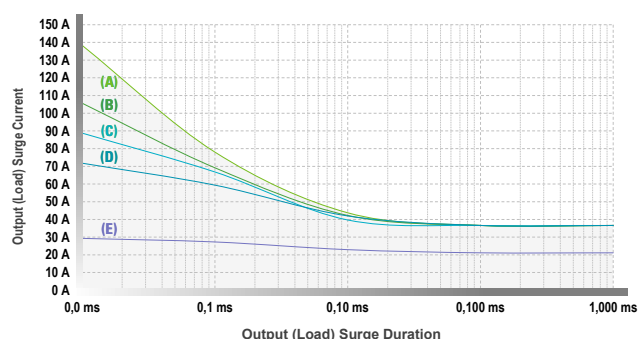

- (A) **Single Pulse Surge**: Initial SSR internal temperature at 125 °C  
 (B) **Repetitive Surges (5% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (C) **Repetitive Surges (10% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (D) **Repetitive Surges (20% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (E) **Repetitive Surges (50% Duty Cycle)**: Initial SSR internal temperature 125 °C

#### 20A | 200V Versions

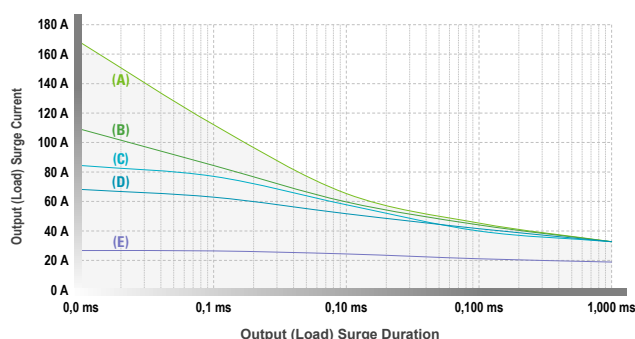


- (A) **Single Pulse Surge**: Initial SSR internal temperature at 125 °C  
 (B) **Repetitive Surges (5% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (C) **Repetitive Surges (10% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (D) **Repetitive Surges (20% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (E) **Repetitive Surges (50% Duty Cycle)**: Initial SSR internal temperature 125 °C

# Solid-State Relays


## SRP1-CC Series

### 40A | 100V Versions

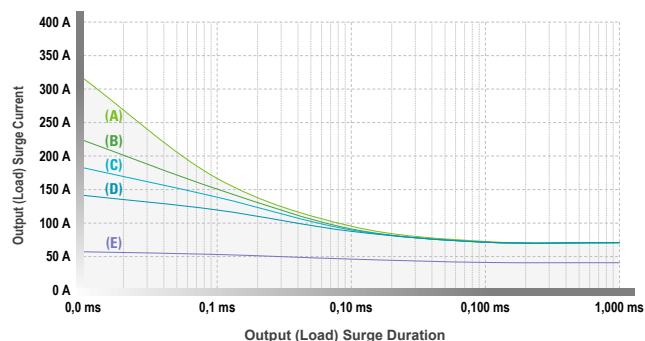

(A) **Single Pulse Surge**: Initial SSR internal temperature at 125 °C  
 (B) **Repetitive Surges (5% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (C) **Repetitive Surges (10% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (D) **Repetitive Surges (20% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (E) **Repetitive Surges (50% Duty Cycle)**: Initial SSR internal temperature 125 °C

### 40A | 200V Versions

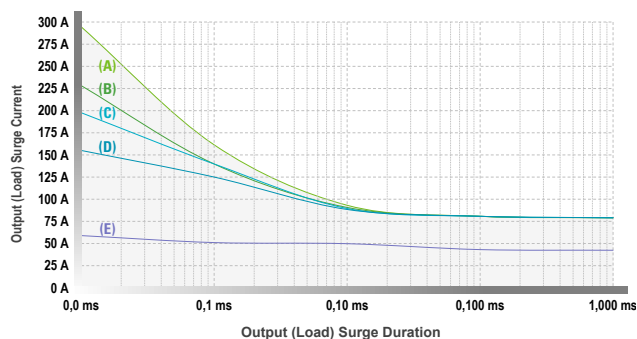

(A) **Single Pulse Surge**: Initial SSR internal temperature at 125 °C  
 (B) **Repetitive Surges (5% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (C) **Repetitive Surges (10% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (D) **Repetitive Surges (20% Duty Cycle)**: Initial SSR internal temperature 175 °C  
 (E) **Repetitive Surges (50% Duty Cycle)**: Initial SSR internal temperature 125 °C

## General Specifications<sup>1</sup>

| GENERAL DATA     |                                                                                                                                                                                                                                            |                                                                       |                    |                                                                   |                  |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------|-------------------------------------------------------------------|------------------|
| SYMBOL           | PARAMETER                                                                                                                                                                                                                                  | CONDITION                                                             | RANGE              | VALUE                                                             | UNIT             |
| -                | LED for Input (Control) Status Indicator                                                                                                                                                                                                   | -                                                                     | -                  | Continuously ON<br>Green LED, when<br>control input is<br>applied | -                |
| U <sub>i</sub>   | Isolation (Dielectric Strength)                                                                                                                                                                                                            | Input to Output<br>(50/60 HZ)<br>Input/Output to<br>Ground (50/60 HZ) | Nominal<br>Nominal | 2 500<br>2 500                                                    | V <sub>rms</sub> |
| R <sub>i</sub>   | Insulation Resistance                                                                                                                                                                                                                      | @ 500 V DC                                                            | Minimum            | 1                                                                 | GΩ               |
| C <sub>i</sub>   | Coupling Capacitance                                                                                                                                                                                                                       | Input/Output                                                          | Maximum            | <8                                                                | pF               |
| U <sub>imp</sub> | Impulse Withstand Voltage                                                                                                                                                                                                                  | -                                                                     | Nominal            | 2500                                                              | V <sub>rms</sub> |
| -                | Short Circuit Current Rating (SCCR)                                                                                                                                                                                                        | -                                                                     | -                  | 5                                                                 | kA               |
| -                | Endurance according to American Standard<br>UL508                                                                                                                                                                                          | -                                                                     | Typical            | 6 000                                                             | Cycles           |
| -                | MTTFd (Mean Time to Dangerous Failure)<br>(Calculated in accordance with the guidelines<br>for safety-related parts of control systems,<br>as specified by the international standard ISO<br>13849-1)                                      | -                                                                     | -                  | 45                                                                | Years            |
| -                | MTBF* (Mean Time Between Failures)<br>(Calculated in accordance with the Military<br>Handbook Guidelines for Reliability Prediction<br>of Electronic Equipment, as specified by the<br>US Department of Defense Standard MIL-<br>HDBK-217) | @ 40 °C ambient<br><br>@ 60 °C ambient                                | -<br><br>-         | 25<br><br>17                                                      | Years            |

\*All parameters at 50% power rating and 100% duty cycle.

# Solid-State Relays

## SRP1-CC Series

### General Specifications<sup>1</sup> (Continued)

| ENVIRONMENTAL DATA |                                                                                                                                             |                                                          |                    |                         |                    |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------|-------------------------|--------------------|
| SYMBOL             | PARAMETER                                                                                                                                   | CONDITION                                                | RANGE              | VALUE                   | UNIT               |
| -                  | Vibration<br>(Test conducted in accordance with the Vibration Environmental Testing Guidelines of the International Standard IEC 60068-2-6) | 5-100Hz                                                  | Nominal            | 10                      | g                  |
| -                  | Shock<br>(Test conducted in accordance with the Shock Environmental Testing Guidelines of the International Standard IEC 60068-2-27)        | 11ms                                                     | Nominal            | 30, 40, 50              | g                  |
| Tamb               | Ambient Temperature - Operating (Working)                                                                                                   | No icing, no condensation                                | Maximum<br>Minimum | 100 (212)<br>-40 (-40)* | °C (°F)<br>°C (°F) |
| Tstg               | Ambient Temperature - Storage                                                                                                               | No icing, no condensation                                | Maximum<br>Minimum | 90 (194)<br>-25 (-13)   | °C (°F)<br>°C (°F) |
| HR                 | Relative Ambient Humidity<br>(Per international standard IEC/EN 60068-2-78)                                                                 | Non-condensing<br>@ 40 °C                                | Nominal            | 40 to 85                | %                  |
| -                  | Pollution Degree                                                                                                                            | Non-conductive pollution with condensation possibilities | Nominal            | 2                       | -                  |


\*Value for 10A, 20A, 40A and 50A versions is -55 (-67) °C (°F).

| MECHANICAL DATA |                                                                                                                                                               |                           |                    |                                |            |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------|--------------------------------|------------|
| SYMBOL          | PARAMETER                                                                                                                                                     | CONDITION                 | RANGE              | VALUE                          | UNIT       |
| -               | Product Weight                                                                                                                                                | -                         | Typical            | 80 (0.18)                      | g (lbs)    |
| -               | Housing Material<br>(In accordance with the American Standard UL- 94 for Safety of Flammability of Plastic Materials for Parts in Devices and Appliances)     | -                         | -                  | Plastic UL 94 V-0              | -          |
| -               | Baseplate Material                                                                                                                                            | -                         | -                  | Aluminum,<br>Tinned-plated     | -          |
| -               | Touch Protection Level<br>(Test conducted in accordance with the IP Code of Degrees of Protection Testing Guidelines of the International Standard IEC 60529) | -                         | -                  | IP20                           | -          |
| -               | Screw Torque Range                                                                                                                                            | Input (Control) Terminals | Minimum<br>Maximum | 1.2 (11)<br>2.0 (18)           | Nm (in-lb) |
|                 |                                                                                                                                                               | Input (Control) Terminals | Minimum<br>Maximum | 2 (18)<br>3 (26)               | Nm (in-lb) |
|                 |                                                                                                                                                               | SSR Mounting              | Minimum<br>Maximum | 1.2 (11)<br>1.5 (13)           | Nm (in-lb) |
|                 |                                                                                                                                                               | SSR Mounting              | Minimum<br>Maximum | 1.2 (11)<br>1.5 (13)           | Nm (in-lb) |
| -               | Screw Thread Size                                                                                                                                             | Input Terminals           | -                  | M4 x 0.7                       | -          |
|                 |                                                                                                                                                               | Output Terminals          | -                  | M5 x 0.8                       | -          |
|                 |                                                                                                                                                               | SSR Mounting              | -                  | M4 x 12mm or<br>#6-32 Pan Head | -          |


# Solid-State Relays

SRP1-CC Series


## Product Dimensions (Millimeters)

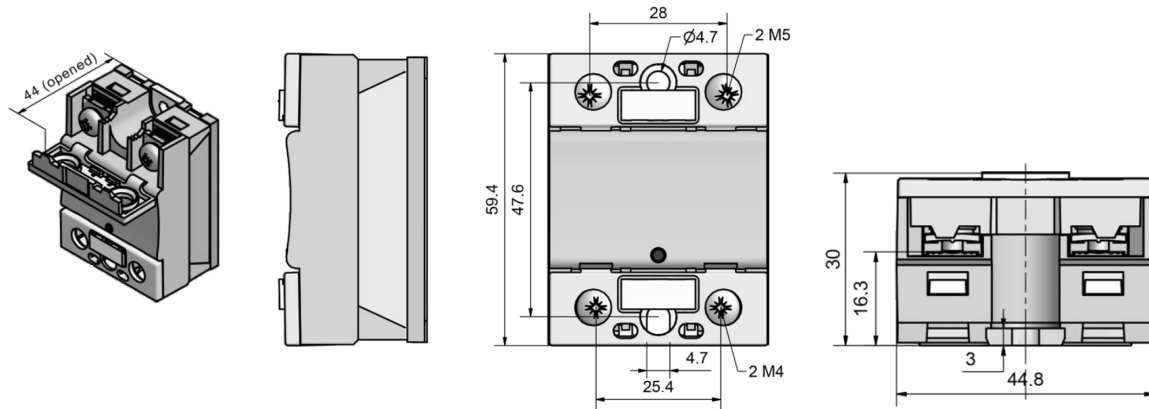

## Wiring Diagram

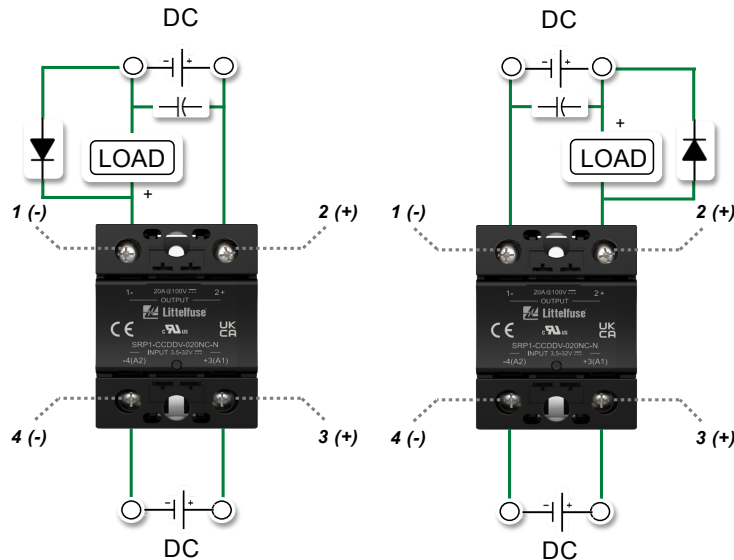

## Equivalent Circuit Block

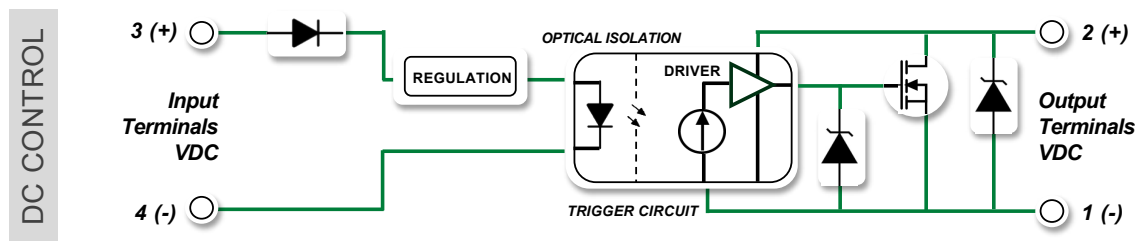



# Solid-State Relays

## SRP1-CC Series

### Short-Circuit Protection by Fuse

To safeguard solid-state relays (SSRs) against load short circuits, the use of fuses is essential, especially fast-acting ones. Here are the key considerations:



- **Fuse Selection:** The  $I^2t$  value (energy withstand capability) of the fuse should be less than half of the  $I^2t$  value of the relay. Standard fuses are inadequate because they cannot react swiftly enough to prevent fault currents from exceeding the maximum levels that thyristors (used in SSRs) can handle. Therefore, we strongly recommend employing ultra-fast fuses.
- **Fuse Placement:** Position the fuse in front of the SSR in the circuit. This strategic placement ensures that if the relay must unexpectedly break the earth insulation (due to overheating, case damage, or leakage with the heatsink), the fuse will protect the entire circuit from firing.
- **Resource for Fuse Options:** For the most suitable fuse options, consider checking the [Littelfuse website](https://www.littelfuse.com).

### Standards Conformity & Certifications

#### Product Safety Certifications

Products tested, compliant and certified to the following standards that states the requirements for electrical products to ensure they are safe for consumers to use.

| CERTIFICATION BODY MARK                                                             | CERTIFICATION BODY NAME | CERTIFICATION DESCRIPTION                                                                              | STANDARDS COVERED BY THE CERTIFICATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | cRUus                   | North American certificate of compliance with the Safety requirements for Industrial Control Equipment |  <b>UL508</b><br>American Standard of Safety for Industrial Control Equipment.<br> <b>CAN/CSA C22.2 No. 14-18</b><br>Canadian Standard of Safety for Industrial Control Equipment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|  | CE                      | Conformity with the European safety, health, and environmental protection requirements.                |  <b>LVD Directive 2014/35/EU</b><br>EU Directive of Safety for Low Voltage Gear Equipment.<br>In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3<br> <b>EMC Directive 2014/30/EU</b><br>EU Directive of Electromagnetic Compatibility.<br>In accordance with the Low Voltage Gear Testing Guidelines of the International Standard IEC 60947-4-3<br> <b>RoHS Directive 2015/863/EU</b><br>EU Directive of Hazardous Substances Restriction.<br>In accordance with the Assessment of electrical and electronic products with respect to the restriction of Hazardous substances Guidelines of the International Standard IEC 63000 |

# Solid-State Relays

## SRP1-CC Series

### EMC Compliance (Electro-Magnetic Compatibility)

#### Radiated Emissions

| -                                                                                 | STANDARD NAME | STANDARD DESCRIPTION                             | STANDARD NUMBER                 | LEVELS                                       |
|-----------------------------------------------------------------------------------|---------------|--------------------------------------------------|---------------------------------|----------------------------------------------|
|  | Radiated RF   | Radio interference field emission (radiated)     | International Standard CISPR 11 | Class A: 30M – 1GHz                          |
|  | Conducted RF  | Radio interference voltage emissions (conducted) | International Standard CISPR 11 | Class A (with external filter): 150k – 30MHz |

#### Immunity

| -                                                                                 | STANDARD NAME | STANDARD DESCRIPTION                        | STANDARD NUMBER                      | LEVELS                                                                                               |
|-----------------------------------------------------------------------------------|---------------|---------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------|
|  | ESD           | Immunity to Electrostatic Discharge (ESD)   | International Standard IEC 61000-4-2 | Level 3:<br>-Contact Discharge: $\pm 6$ kV<br>-Air Discharge: $\pm 8$ kV<br>-Performance Criteria: A |
|  | Burst         | Immunity Electrical Fast Transients (Burst) | International Standard IEC 61000-4-4 | 2 kV<br>Performance Criteria: B                                                                      |
|  | Surge         | Immunity to Electrical Surges               | International Standard IEC 61000-4-5 | 2 kV<br>Performance Criteria: B                                                                      |

While these products are designed to meet high industrial standards for Class A equipment, ensuring robust performance in demanding environments, they may cause radio interference when used in domestic settings. To mitigate this, additional noise reduction measures, such as filters or shielding, may be necessary. Ensure that the entire setup where the SSR is installed complies with all relevant EMC regulations required by the application.

### Environmental Compliance<sup>2</sup>

Products comply to the following environmental standard requirements for electrical products to ensure they are safe for consumers to use.

| -                                                                                   | STANDARD NAME | STANDARD DESCRIPTION                                                                                                                | STANDARD NUMBER                            |
|-------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|  | RoHS          | Conformity with the European Restriction of Hazardous Substances in electrical and electronic products                              | European Directive 2015/863/EU (IEC 63000) |
|  | REACH         | Conformity with the Registration, Evaluation, Authorization and Restriction of Chemicals regulation to ensure safe use of chemicals | European Directive 1907/2006               |
|  | WEEE          | Conformity with the Waste Electrical and Electronic Equipment regulation to ensure proper disposal and recycling of e-waste         | Regulation 2002/96/EC                      |

# Solid-State Relays

## SRP1-CC Series

### Accessories

| IMAGE                                                                               | CATALOG NUMBER | TYPE              | DESCRIPTION                                                                           |
|-------------------------------------------------------------------------------------|----------------|-------------------|---------------------------------------------------------------------------------------|
|    | SADH-C1N600    | DIN Rail Adapter  | Allows SSR to be mounted on a 35 mm DIN type rail. It has a 6 °C/W Thermal Resistance |
|    | C103PM         | DIN Rail          | 35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length                        |
|    | SADH-NN210     | Heatsink          | 2.1 °C/W Thermal Resistance                                                           |
|    | SADH-NN175     | Heatsink          | 1.75 °C/W Thermal Resistance                                                          |
|    | SADH-NN120     | Heatsink          | 1.2 °C/W Thermal Resistance                                                           |
|    | SADH-NN100     | Heatsink          | 1.0 °C/W Thermal Resistance                                                           |
|    | SADH-NN050     | Heatsink          | 0.5 °C/W Thermal Resistance, 24 VDC                                                   |
|   | SADH-ND030     | Heatsink          | 0.3 °C/W Thermal Resistance, 24 VDC                                                   |
|  | SADH-NA030     | Heatsink          | 0.3 °C/W Thermal Resistance, 230 VAC                                                  |
|  | SANT-C1NM40    | Mounting Screws   | Screw Kit for heatsink mounting                                                       |
|  | SANP-C1N030    | Thermal Interface | Thermal Pad (Usable for 1 relay)                                                      |
|  | SANG-CNN090    | Thermal Interface | Heat Sink Thermal Paste 20 ml (Usable for 60+ relays)                                 |
|  | P0200-19       | Thermal Interface | Heat Sink Compound 2 grams (Usable for 1 relay)                                       |
|  | P0200-20       | Thermal Interface | Heat Sink Compound 100 grams (Usable for 50+ relays)                                  |

Notes:

<sup>1</sup>All parameters at 25 °C unless otherwise specified.

<sup>2</sup>The environmental compliance data reflects the most current information available and adheres to our rigorous standards for quality and sustainability. These specifications are valid from the product's initial release and are subject to change with ongoing improvements.

### Warning Information

**Caution: Material Damage, Electric Shock, and Arc Flash Hazard.** Before installing or working with this equipment, take the following precautions:

1. **Disconnect all power:** Ensure that all power sources are disconnected.

2. **Verify connections:** Double-check all connections.

Failure to adhere to these instructions may lead to **serious injury or damage** of equipment.

**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).