

FUSES




Non resettable fuses

A12FA 380V

6,3 × 32

Miniature Fuses Type A12FA 380V

super-quick-acting FF
high breaking capacity
Ceramic tube

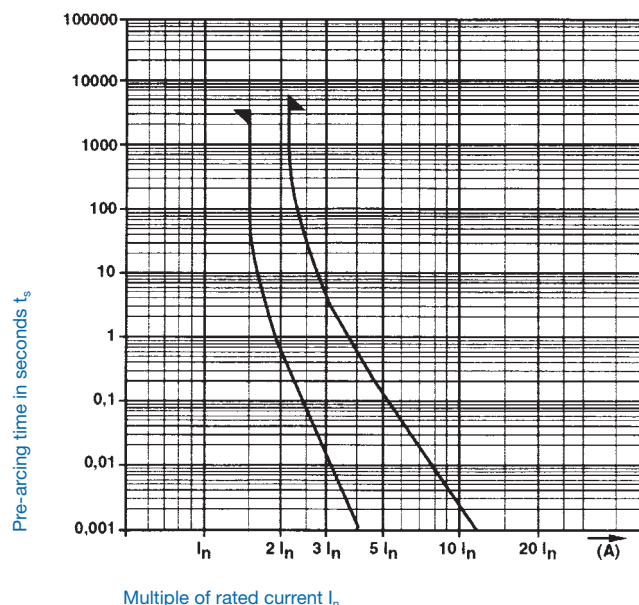

Standards

none

Approvals

UL

Pre-arcing time/current characteristic (at T_a 23 °C)

Rated current I_n	$n \cdot I_n$	
	$1,5 \cdot I_n$	$2,1 \cdot I_n$
	min.	max.
0,1 – 12,5 A	1 h	1 h

Technical data

Weight 3 g

Order No.	Rated current I_n Rated voltage U_n	Breaking capacity	Voltage drop	Sustained power dissipation	Pre-arcing I^2t	Approvals
			at I_n max. mV	at $1,5 \cdot I_n$ max. W	at $10 \cdot I_n$ A ² s	
7022.0000	0,100 A / 380 V	150 kA / 380 V AC p.f. / $\cos \varphi \geq 0,2$	2600	1,5	$1,5 \cdot 10^{-3}$	•
7022.0010	0,125 A / 380 V		2300	1,5	$2,9 \cdot 10^{-3}$	•
7022.0020	0,160 A / 380 V		1700	1,4	$5,8 \cdot 10^{-3}$	•
7022.0030	0,200 A / 380 V		1500	1,2	$1,3 \cdot 10^{-2}$	•
7022.0040	0,250 A / 380 V		1500	2,2	$1,9 \cdot 10^{-2}$	•
7022.0050	0,315 A / 380 V		2150	4,1	$2,2 \cdot 10^{-2}$	•
7022.0060	0,400 A / 380 V		2750	2,85	$2,3 \cdot 10^{-2}$	•
7022.0070	0,500 A / 380 V		2850	3,65	$4,1 \cdot 10^{-2}$	•
7022.0080	0,630 A / 380 V		2000	3,2	$1 \cdot 10^{-1}$	•
7022.0090	0,800 A / 380 V		2050	4,15	$1,7 \cdot 10^{-1}$	•
7022.0100	1 A / 380 V		1750	4,45	$4,4 \cdot 10^{-1}$	•
7022.0110	1,25 A / 380 V		740	4,15	$2 \cdot 10^{-1}$	•
7022.0120	1,60 A / 380 V		570	3,05	$5,4 \cdot 10^{-1}$	•
7022.0130	2 A / 380 V		615	4,50	$8,1 \cdot 10^{-1}$	•
7022.0140	2,50 A / 380 V		465	4,35	1,8	•
7022.0150	3,15 A / 380 V		440	5	3,4	•
7022.0160	4 A / 380 V		335	4,8	8,1	•
7022.0170	5 A / 380 V		395	7,7	12	•
7022.0180	6,30 A / 380 V		170	3	6	•
7022.0190	8 A / 380 V		135	3	15	•
7022.0200	10 A / 380 V		155	4,75	20	•
7022.0210	12,50 A / 380 V		210		15	•