

4-1904124-3 ✓ ACTIVE

Micro Relay A

TE Internal #: 4-1904124-3

Automotive Power Relay, DC, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 12 VDC Coil Voltage, 12 VDC Contact Voltage, Micro Relay A

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **Automotive Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form C SPDT-CO**

Current Type: **DC**

Contact Current Rating: **25 A**

Features

Product Type Features

Relay & Contactor Type	Automotive Power Relay
------------------------	------------------------

Configuration Features

Contact Arrangement	1 Form C SPDT-CO
---------------------	------------------

Electrical Characteristics

Contact Switching Load (Min)	1000mA @ 5VDC
------------------------------	---------------

Contact Limiting Short-Time Current	150 A
-------------------------------------	-------

Contact Limiting Making Current	120 A
---------------------------------	-------

Coil Resistance	119 Ω
-----------------	--------------

Contact Limiting Continuous Current	30 A
-------------------------------------	------

Contact Limiting Breaking Current	30 A
-----------------------------------	------

Insulation Initial Dielectric Between Open Contacts	500 Vrms
---	----------

Contact Current Rating	25 A
------------------------	------

Coil Voltage Rating	12 VDC
---------------------	--------

Contact Voltage Rating	12 VDC
------------------------	--------

Coil Power Rating DC	1.42 W
----------------------	--------

Insulation Initial Dielectric Between Contacts & Coil	500 Vrms
---	----------

Body Features



Product Weight	16 g[.565 oz]
----------------	---------------

Enclosure Type	Dust Protected
----------------	----------------

Contact Features

Contact Material	Silver Alloy
------------------	--------------

Termination Features

Main Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Coil Termination & Connection Type	Quick Connect Terminals
------------------------------------	-------------------------

Mechanical Attachment

Product Mount Type	Socket Mount
--------------------	--------------

Dimensions

Product Width	15.5 mm[.61 in]
---------------	-----------------

Product Length	23 mm[.906 in]
----------------	----------------

Product Height	25.4 mm[1 in]
----------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	125 °C[257 °F]
---	----------------

Operation/Application

Coil Magnetic System	Monostable
----------------------	------------

Current Type	DC
--------------	----

Other

Contact Current Class	>25 – ≤32 A
-----------------------	-------------

Coil Power Rating Class	>1 – ≤1.5 W
-------------------------	-------------

Height Class (Mechanical)	>22 – ≤27 mm[>.866 – ≤1.063 in]
---------------------------	---------------------------------

Length Class (Mechanical)	>22 – ≤33 mm[>.866 – ≤1.299 in]
---------------------------	---------------------------------

Width Class (Mechanical)	>14 – ≤16 mm[>.551 – ≤.63 in]
--------------------------	-------------------------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted
---	----------------------------



	Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | Micro Relay A

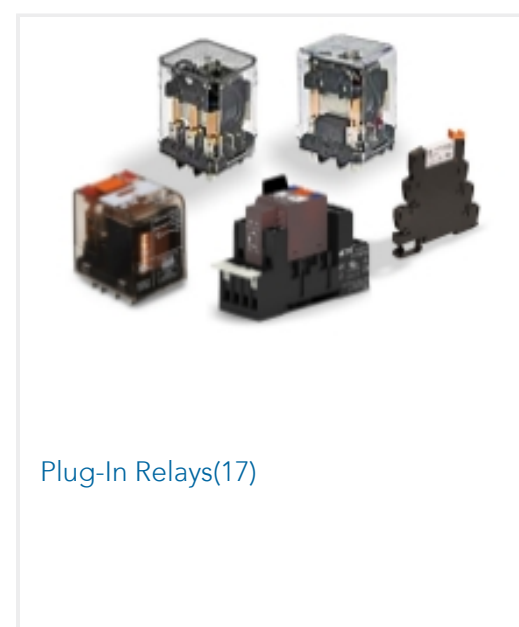

Customers Also Bought



TE Part #K1143392
Battery Disconnecter 35-411-120-R




TE Part #T1610243121-000
H24B-SGR-LB-PG21



TE Part #4-1393247-4
W31-X2M1G-7.50=W23/W31




TE Part #4-1393249-9
W58-XC4C12A-5=W58

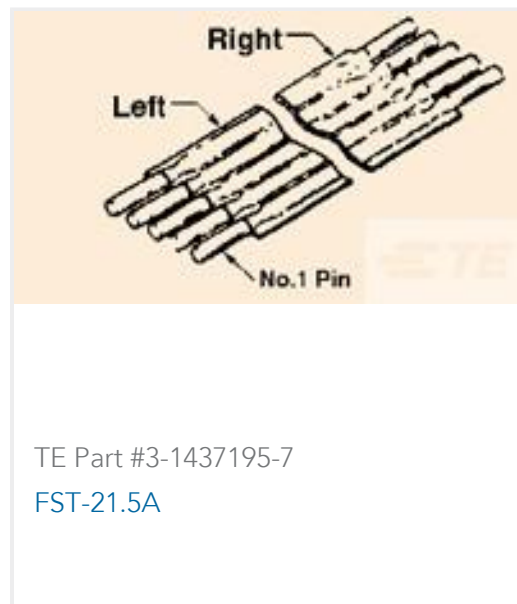

TE Part #3-1437195-7
FST-21.5A



TE Part #1-2335143-1
MINI I/O PLUG KIT TYPE II L,(100pc)

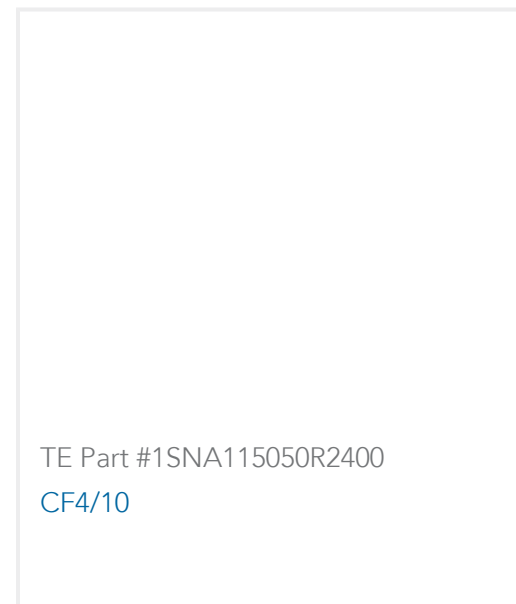

TE Part #1SNA115050R2400
CF4/10



TE Part #C39701-000
B-155-3810



TE Part #1-1904045-5
V23333Z1001B045-EV-100



TE Part #1-1105000-2
HD.M-C-STI.AU.0,3

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_4-1904124-3_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1904124-3_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1904124-3_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Automotive Relay Application Notes

English

Micro Relay A, Micro ISO, Plug-in

English



Product Specifications

Definitions General Purpose Relays

English