


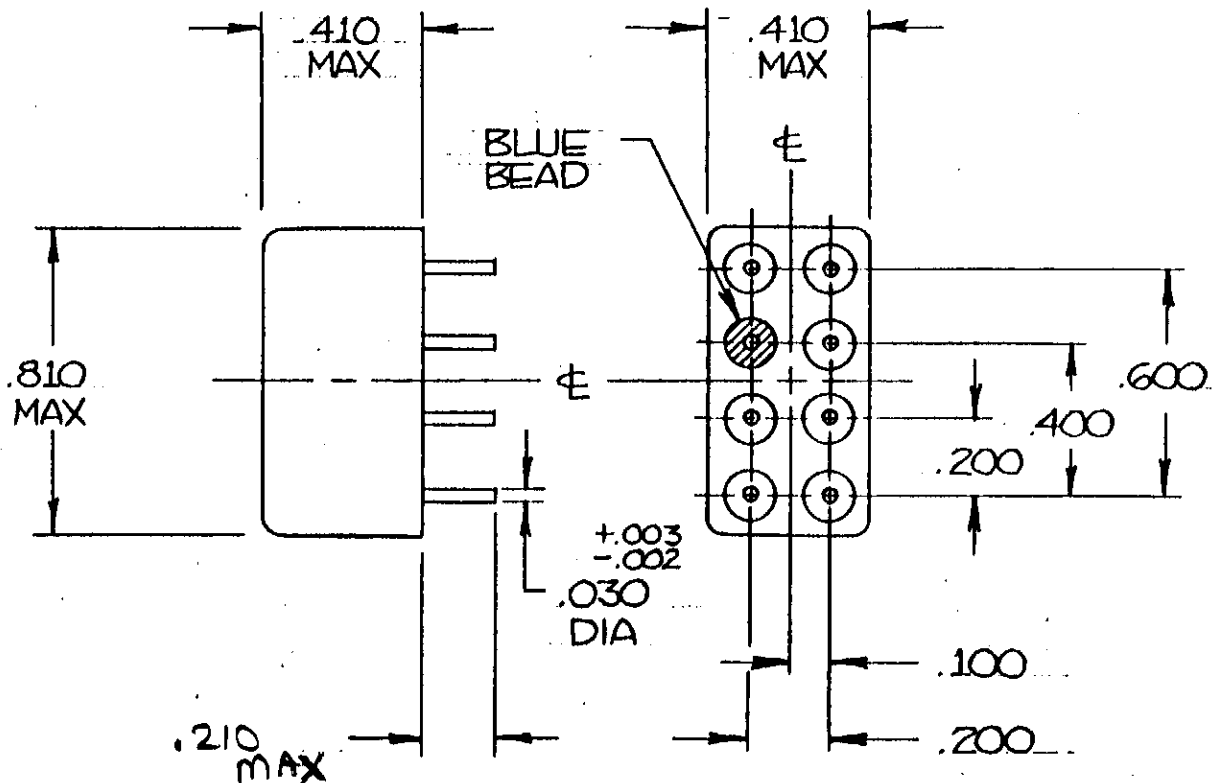

COIL: @ +25°C

RESISTANCE 814 OHMS ± 10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 12.1 VDC

MUST RELEASE

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 20 g's

SHOCK 150 g's 11 MS.DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 3.5 MS MAX

RELEASE TIME 3 MS MAX

CONTACT BOUNCE 1 MS MAX

CUSTOMER DATA SHEET

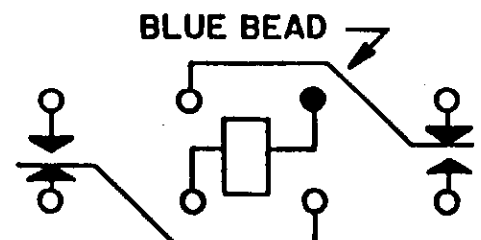

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC 100,000 OPERATIONS

DR. 8/1/91 JAB

CK. 8/1/91 JAB



Communications  
Instruments, Inc.

CUST. P+B

CUST. NO. HC-110-24

TYPE HFW RELAY

**HFW1201S142**