


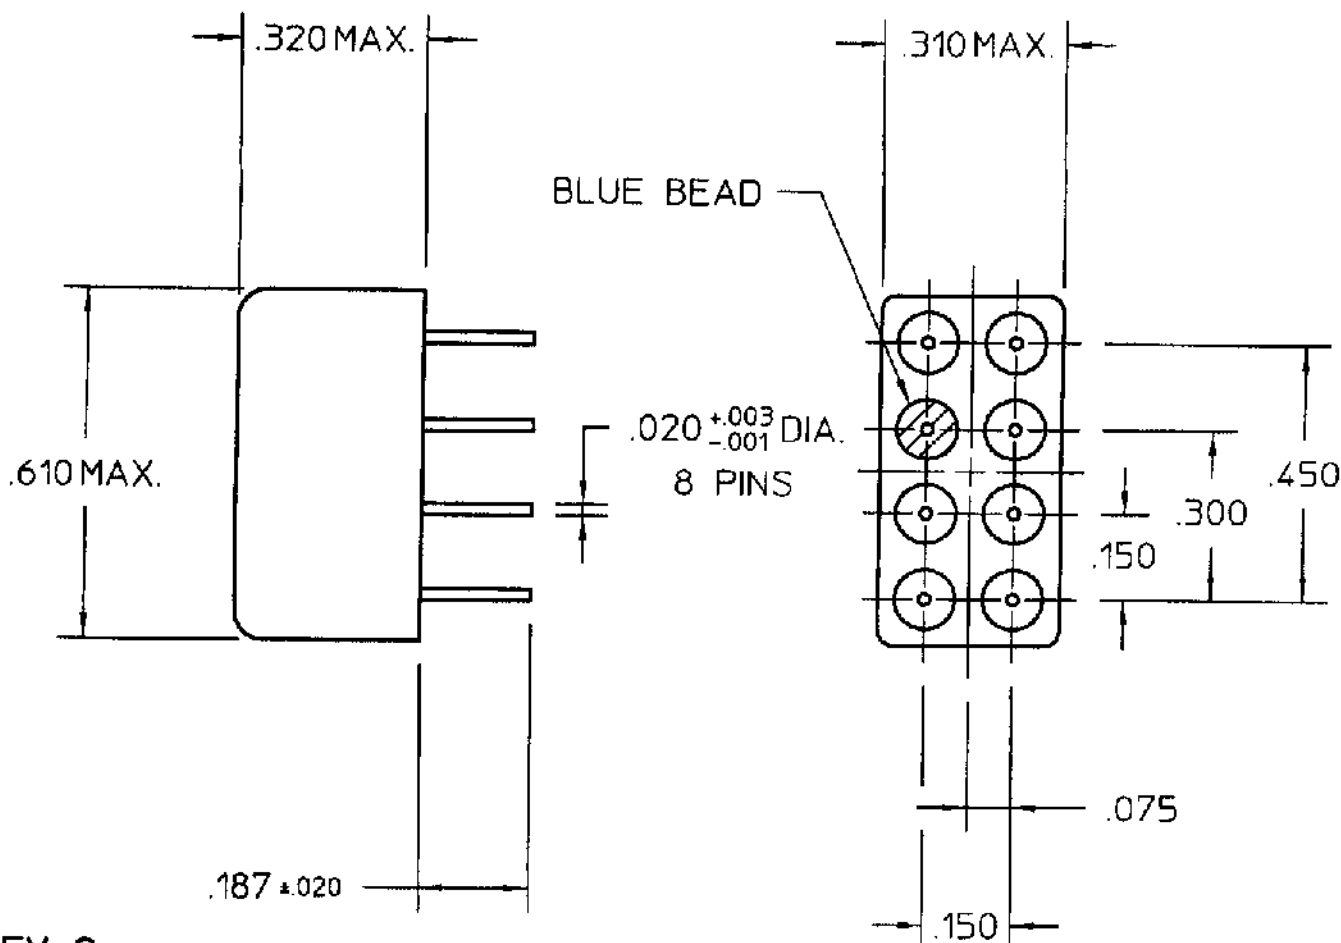

REV. 2

DCO 142602

TOL. = ±.010

COIL: @ 25°C
 RESISTANCE _____ 210 OHMS ± 10%
 NOMINAL VOLTAGE _____ 12.0 VDC
 MUST OPERATE _____ 5.4 VDC


 MUST RELEASE _____ 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 4 MS MAX.
 _____ CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

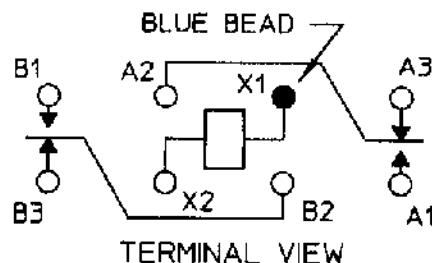

CONTACT RATING: _____ LOW LEVEL TO
 _____ 2 AMPS 28 VDC RESISTIVE
 _____ 50,000 OPERATIONS

DR. PBB 1/9/01

CK. 1/10/01

CI Technologies
 advanced control electronic solutions

CUST. _____ QPL

CUST. NO. _____ M39016/13-056P REV. _____

'3SBC' RELAY

3SBC2001A2