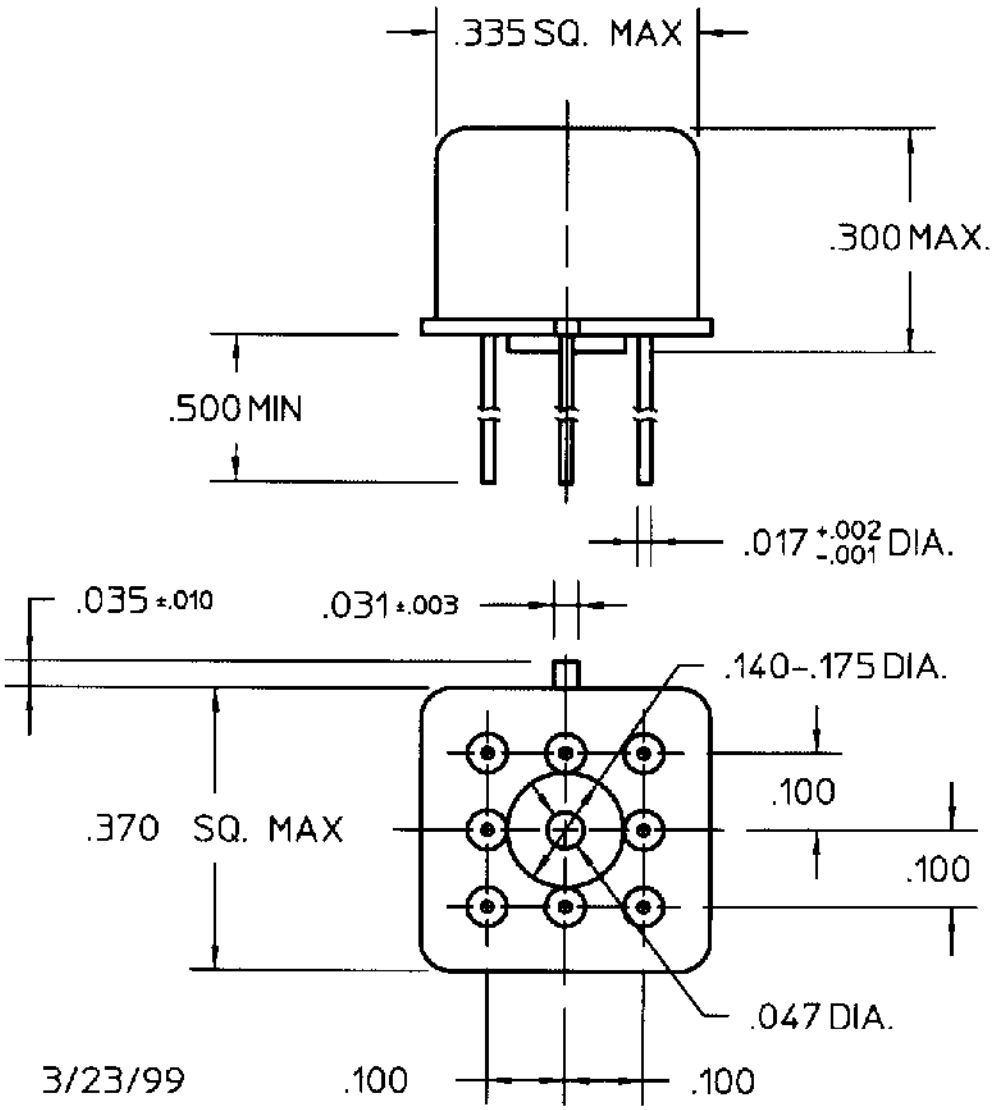

REV. 2 3/23/99
DCO 140960

COIL: @ 25°C

RESISTANCE	98 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.5 VDC
MUST RELEASE	.28 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/28/95 CK Jerry 3-23-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO.

TYPE MGA RELAY

MGAC-6W