


KEMET Part Number: PEH200YT4220MB2
(A451SM222M450A)

Aluminum Electrolytic, 85C, KEMET, PEH200, 2200 uF, 20%, 450 V, -40/+85C

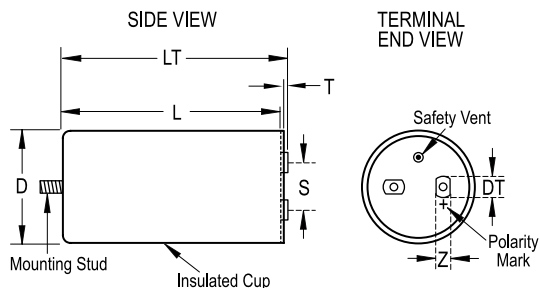

Dimensions

D	76.6mm +/-1mm
L	106mm +/-1mm
T	3.8mm NOM
S	32mm +/-0.5mm
DT	15mm NOM
LT	113mm +/-1mm
Z	13mm NOM

Packaging Specifications

Weight:	585 g
Sleeving:	Yes
Packaging:	Bulk
Packaging Quantity:	9

General Information

Dielectric:	Aluminum Electrolytic
Supplier:	KEMET
Series:	PEH200
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Notes:	Dimensions D And L Include Sleeving. MS = M12x16

Specifications

Capacitance:	2200 uF
Capacitance Tolerance:	20%
Voltage DC:	450 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Life:	19000 Hrs (Rated Voltage And Ripple Current At 85C)
Resistance:	29 mOhms (100Hz 20C), 15 mOhms (100kHz 20C)
Current:	12.1 Amps (100Hz 85C), 50.1 Amps (10kHz 50C), 35.6 Amps (10kHz 40C)
Leakage:	6970 uAmps (5min 20C)
Inductance:	17 nH (ESL)