
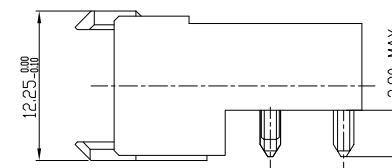
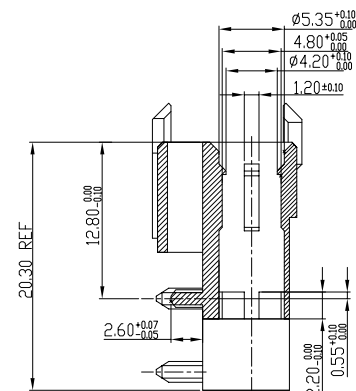


LAY-OUT
P.C.B.- HOLE

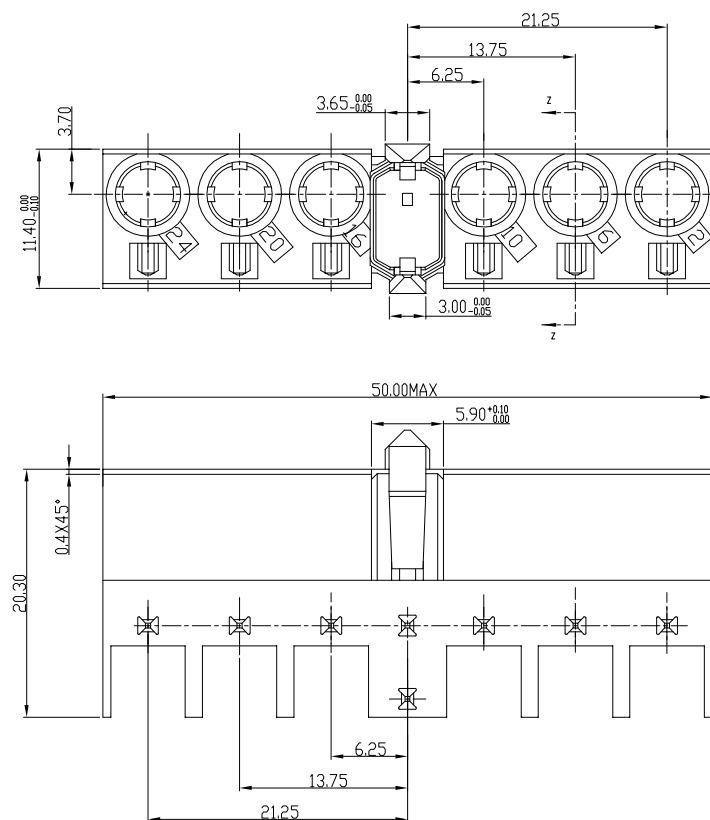

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MATERIAL: PLOYESTER 30% GLASS FILLED REINFORCED.
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A VAVE SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK CIRCUIT BOARD

rev	ecn no	dr	date
A	CONVERSION REVISION 05	KN	14-09-01
B	DG05-0333	Kasorn	16-09-05
C	DG07-0011	Kasorn	11-01-07

Material PLOYESTER 30% GLASS FILLED			Spec ref		
Mat code		✓	tolerance	projection	MM
Heattreat			1DEC±0.2 1DEC 2DEC ± 0.10 2DEC ANGLES±1°10EKEN		
Plating/Finish					
Dr	W.Panis	07-04-92			size
Eng			Product family		A4
Chr			Model Name		ECN
Appr			Model Revision		REL Level
FCI		title		BSC201418004	
		MILLIPACS 2/FEMALE BODY/TYPE L		Rev	
Pro/E file	catalog no	HM2R04PILF		CUSTOMER	sheet 1 of 1