


# IC70 In-Cabinet IO-Link Hubs



## Compact, Cost-Efficient IO-Link Hubs for Integrating Discrete I/O


- Save space with a compact, DIN-rail mountable design
- Increase system flexibility with configurable input/output channels
- Reduce wiring and PLC logic with built-in delays and port mirroring
- Speed up troubleshooting with real-time status LEDs

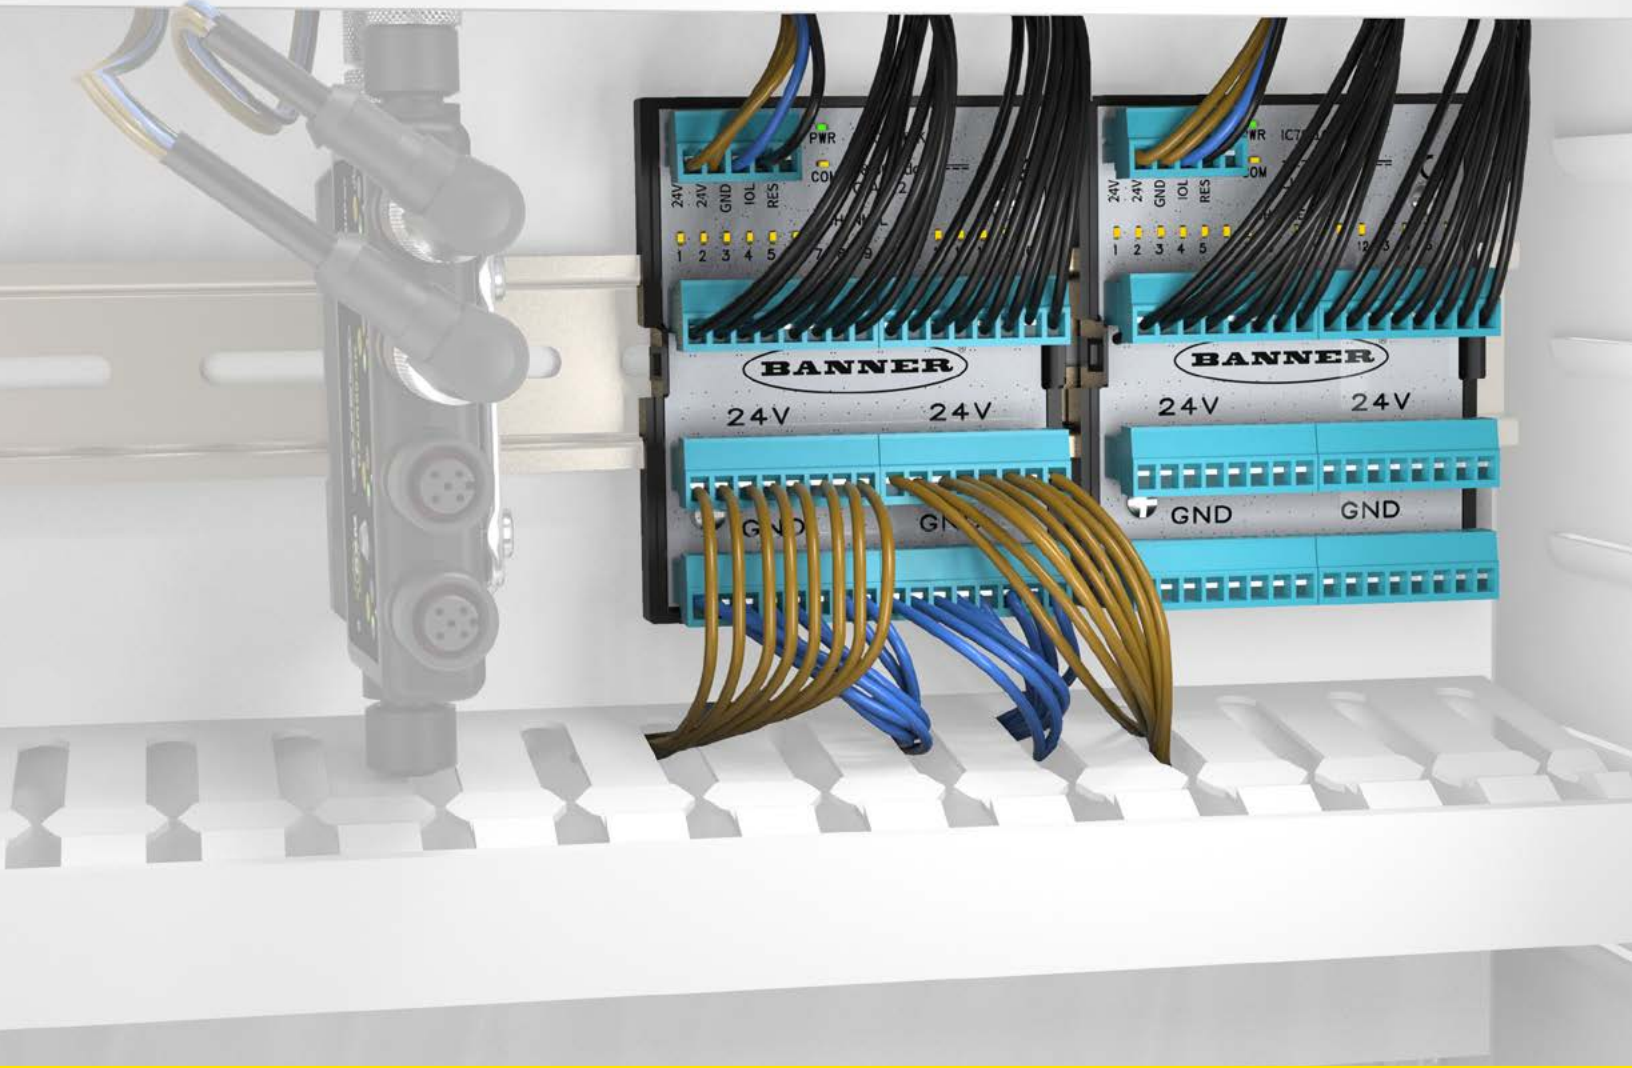

# IC70 In-Cabinet IO-Link Hubs


Description	Connections	Model
16-Channel PNP IO-Link Hub with each channel configurable as an input or output	Screw terminals (included)	IC70-16P-K
16-Channel NPN IO-Link Hub with each channel configurable as an input or output		IC70-16N-K

## Specifications

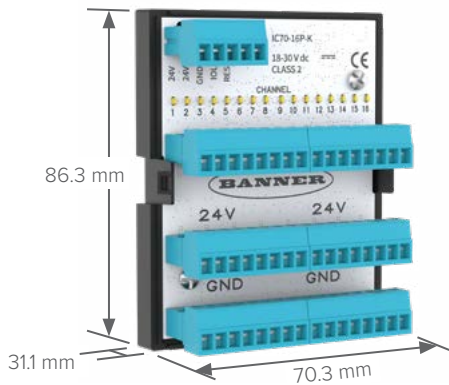

Supply Voltage	18 to 30 V DC
Included	6 screw terminal blocks 1 5-pin screw terminal
Operating Conditions	-40 to +70 °C
Environmental Rating	IP20
Certifications	CE UK CA

## Accessories



**BWA-IC70-ST**  
Screw terminal block (6)  
and 5-pin screw terminal (1)  
replacements



**DXMR90-4K**  
IO-Link master



**SMBR90RADIN**  
DIN rail mounting bracket  
for DXMR90-4K

### 4-Pin M12

Straight connector models listed; for right-angle models, add **A** to the end of **M12F4** (example, BC-M12F4A-22-2)

#### Female

**BC-M12F4-22-2**  
2 m (6.5')  
**BC-M12F4-22-5**  
5 m (16.4')  
**BC-M12F4-22-10**  
10 m (32.8')

#### Male

**BC-M12M4-22-2**  
2 m (6.5')  
**BC-M12M4-22-5**  
5 m (16.4')  
**BC-M12M4-22-10**  
10 m (32.8')



Banner Engineering Corp.

1-888-373-6767 • [www.bannerengineering.com](http://www.bannerengineering.com)

© 2025 Banner Engineering Corp. Minneapolis, MN USA

PN B\_51938070 rev. A