



T1C12400300-12F

SPECIFICATIONS

IP 20



SELV




- Leading & Trailing Edge Triac dimable
- Constant current LED Driver
- Flicker free, O/P Ripple Current < 10%
- Dimming level 10% to 100%
- Output Wattage 12W
- Output Current: 300mA $\pm$ 7%
- Output voltage range of 26-40VDC
- SELV Equivalent
- Application
 - LED indoor lighting
 - LED architectural lighting

General Specifications


Rated Input Voltage	220-240/240/230VAC, 50/60Hz
Operating Input Voltage Range	198-264VAC, 50/60Hz
Input Current	0.1 A Max.
Input Power	15W Max.
Power Factor	>0.9 @ 230Vac Full Load
THD (Typical)	< 30% @ 230Vac Full Load
Efficiency	>80%
Driver Type	Constant Current
Output Current	300mA $\pm$ 7%
Output Voltage Range	26-40VDC
Output Power	12W
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	Triac, Leading Edge & Trailing Edge Dimming
RFI/EMI	CE
Output Type	Class II
Ambient Operating Temperature Range	-10°C to 50°C
Max. Case Temperature	80°C
Sound Rating	NA
Input Surge Protection	Line-Neutral 1kV
Protections	Input Over Current : NON-Resettable
	Input Over Voltage : NA
	Input Under Voltage : NA
	Output Short Circuit : Auto recovery
	Output Open Circuit : Auto recovery
	Output Overload : YES
	Over Temperature : NA
Service Life	30,000 hours @ Tc Max
Approvals / Class	Dry Locations
Warranty	3 Years
Weight	0.092Kg

Note - Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.

Mechanical Data

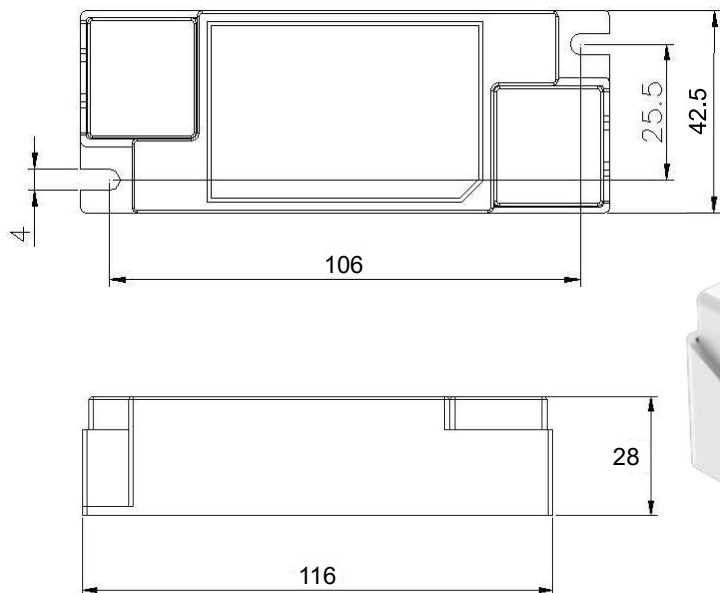


Product Image

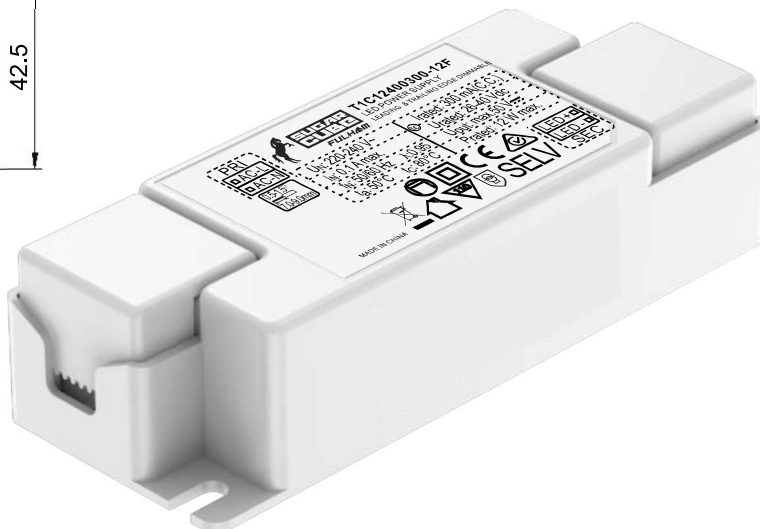

Note : All Dimensions are in mm.


Tolerance=±0.5mm

Wiring Diagrams

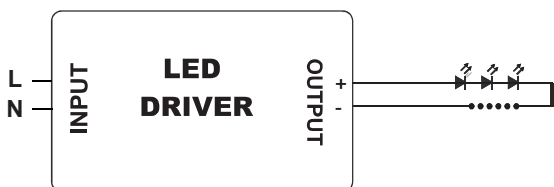

Specification item		Value (Unit)
Input	Input wire cross-section	0.75...1.5mm ²
	Input wire gauge.	16...20AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5mm ²
	Output wire gauge.	16...20AWG
	Output wire strip length	7...9mm

Packaging

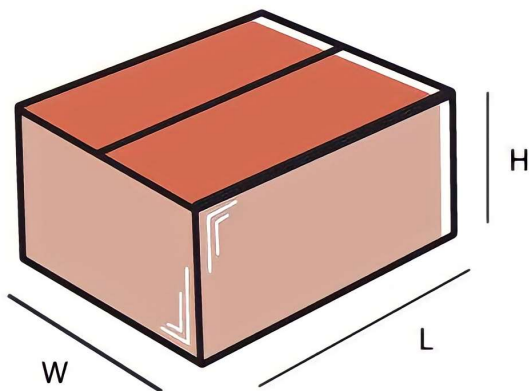

Master carton

OUTER DIMENSION		
L	W	H
390mm	290mm	230mm
Net Weight	Gross Weight	QUANTITY
8.25 kg	8.75 kg	90 pc.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc MAX from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.