


Pin number

Pin View

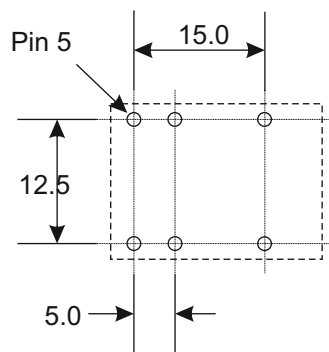

PCB Top Side View

**Electrical Specification**

Primary Nominal Current: Pin 3+4 ~ 5+6, 20A  
 Primary Maximum Current: Pin 3+4 ~ 5+6, 40A  
 Frequency Range: 40 ~ 20KHz  
 Accuracy: 1%  
 DCR Primary: <0.5 Ohms  
 Rated Voltage: 380VAC  
 Ratio: 1:2000  
 Material classification: Class F, 155°C  
 Operating Range: -20°C to +65°C  
 Storage Range: -30°C to +85°C  
 Isolation Voltage: Pri ~ Sec: >4200VAC, 5mA For 1Min.  
 Impulse Withstand Voltage: 5KV Peak.  
 Conforms to: IEC 60044-1, CE

**Mechanical Specification**

All Material UL94-V0 rated.  
 Case: Black  
 Weight: 13g  
 RoHS & REACH Compliant



Image



**VIGORTRONIX**  
 16 De Havilland Way  
 Windrush Park, Witney  
 Oxon, OX29 0YG, UK  
 Tel: +44 (0)1993 777570  
 Fax: +44 (0)1993 777580  
 www.vigortronix.com

**DRAWING**

**Specification: VTX-151-15520S**  
**20Amp Nominal 1:2000**

Issue	Date	Drawn	PCN No	Checked
1	24-03-14	GPH		
2	06-05-14	GPH	063	
3				

**DRAWING NUMBER**

**VTX-151-15520S**