

SERIES: PSK-30F | DESCRIPTION: INTERNAL AC-DC POWER SUPPLY

FEATURES


- universal input (85~305 Vac, 100~430 Vdc)
- -40~85°C operating range
- short circuit, under voltage, and over current protection
- isolation voltage 4,000 Vac
- certified to UL/EN/IEC 62368-1
- designed to meet EN 61558-1, EN 60335-1
- CISPR32/EN55032 Class B with application circuit
- Class II
- low stand-by power consumption (<0.3 W)
- high efficiency up to 89%
- 2,000 m operating altitude
- OVC III



MODEL	output voltage (Vdc)	output current max (A)	output power max (W)	ripple and noise ¹ max (mVp-p)	efficiency ² typ (%)
PSK-30F-3	3.3	6.0	19.8	150	85
PSK-30F-5	5	6.0	30.0	150	86
PSK-30F-9	9	3.33	30.0	150	88
PSK-30F-12	12	2.5	30.0	150	89
PSK-30F-15	15	2.0	30.0	150	89
PSK-30F-24	24	1.29	31.0	150	88
PSK-30F-48	48	0.625	30.0	150	89

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with 1 μ F ceramic and 10 μ F electrolytic capacitors on the output.
 2. At 230 Vac input.
 3. All specifications are measured at Ta=25°C, humidity <75%, nominal input voltage, and rated output load unless otherwise specified.

PART NUMBER KEY

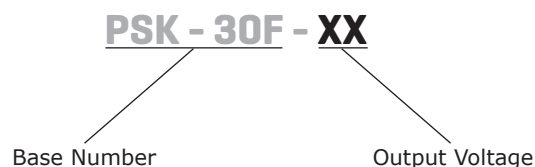

INPUT

parameter	conditions/description	min	typ	max	units
voltage	AC input	85		305	Vac
	DC input	48 Vdc output model		430	Vdc
		all other outputs		430	Vdc
frequency		47	50~60	63	Hz
current	at 115 Vac			1.0	A
	at 230 Vac			0.5	A
inrush current	at 115 Vac		25		A
	at 230 Vac		50		A
leakage current	at 230 Vac/50 Hz			0.1	mA
recommended external input fuse	2A/300V, slow-blow, required				

OUTPUT

parameter	conditions/description	min	typ	max	units
capacitive load	3.3, 5 Vdc output model			6,600	μF
	9, 12 Vdc output model			4,400	μF
	15 Vdc output model			3,300	μF
	24 Vdc output model			1,000	μF
	48 Vdc output model			470	μF
output voltage accuracy	3.3 Vdc output model		±3		%
	all other outputs		±2		%
line regulation	at full load		±0.5		%
load regulation	0~100% load	3.3 Vdc output model	±2.0		
		5 Vdc output model	±1.5		%
		all other outputs	±1.0		%
hold-up time	at 230 Vac		55		ms
temperature coefficient			±0.02		%/°C
no load power consumption	at 230 Vac		0.3	0.55	W

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection	auto recovery	110			%
short circuit protection	continuous, auto recovery				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute, 5mA max	4,000			Vac
safety approvals	certified to 62368-1: UL, EN, IEC designed to meet 61558-1: EN designed to meet 60335-1: EN				
safety class	Class II				
conducted emissions	CISPR32/EN55032 CLASS B, EN55014-1				
radiated emissions	CISPR32/EN55032 CLASS B, EN55014-1				
ESD	IEC/EN61000-4-2 Contact ±6 kV; Air ±8 kV, perf. Criteria A				
radiated immunity	IEC/EN61000-4-3 10 V/m, perf. Criteria A IEC/EN55014-2, perf. Criteria A				
EFT/burst	IEC/EN61000-4-4 ±2 kV, perf. Criteria B IEC/EN61000-4-4 ±4 kV, perf. Criteria A (see Fig. 2 & 3 for recommended circuit) IEC/EN55014-2, perf. Criteria B				

SAFETY & COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
surge	IEC/EN61000-4-5 line to line ± 2 kV, perf. Criteria B				
	IEC/EN61000-4-5 line to line ± 2 kV; line to PE ± 4 kV, perf. Criteria A (see Fig. 2 & 3 for recommended circuit)				
	IEC/EN55014-2, perf. Criteria A				
conducted immunity	IEC/EN61000-4-6 10 Vrms, perf. Criteria A				
MTBF	MIL-HDBK-217F at 25°C	500,000			hours
RoHS	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		85	°C
storage temperature		-40		85	°C
storage humidity		0		95	%



SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	5~10 seconds max	255	260	265	°C
hand soldering	3~5 seconds max	350	360	370	°C


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	69.50 x 39.00 x 24.00 [2.736 x 1.535 x 0.945 inches]				mm
weight			102		g
case material	black plastic, flame-retardant and heat-resistant (UL94V-0)				
cooling method	natural convection				

DERATING CURVES

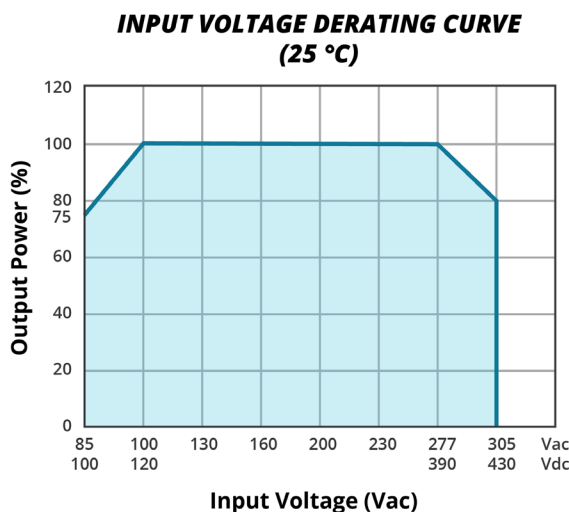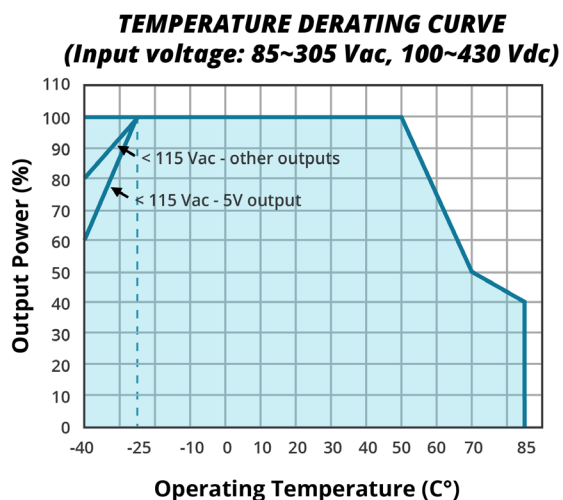


EFFICIENCY CURVES

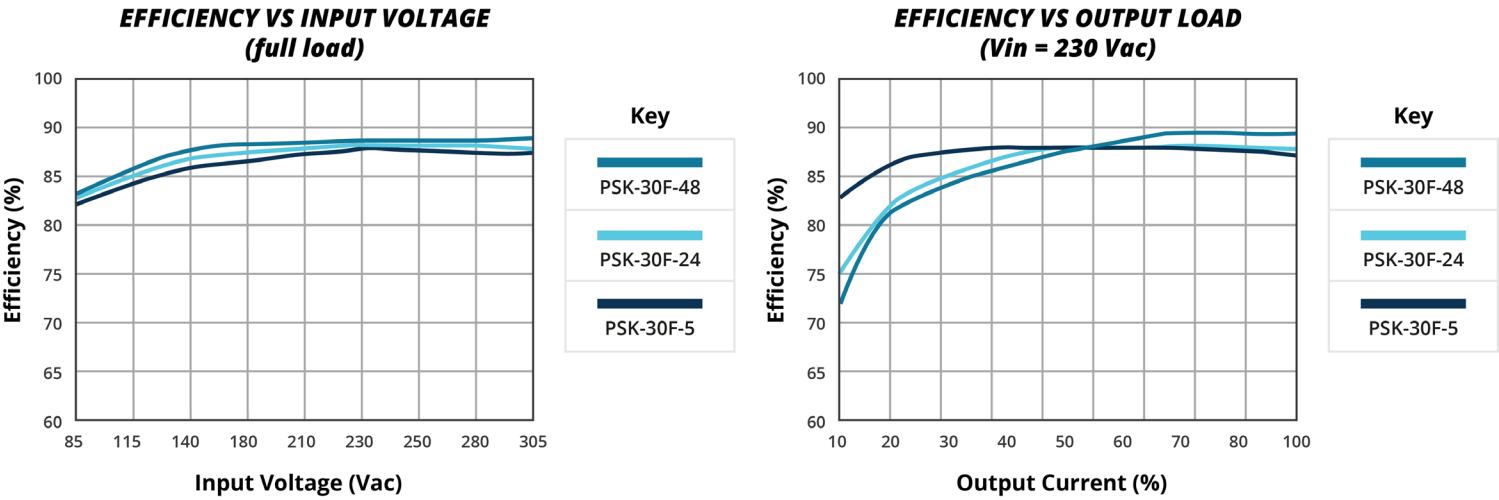

MECHANICAL DRAWING

units: mm [inch]
pin diameter tolerance: ± 0.1 [± 0.004]
tolerance: ± 0.80 [± 0.031]

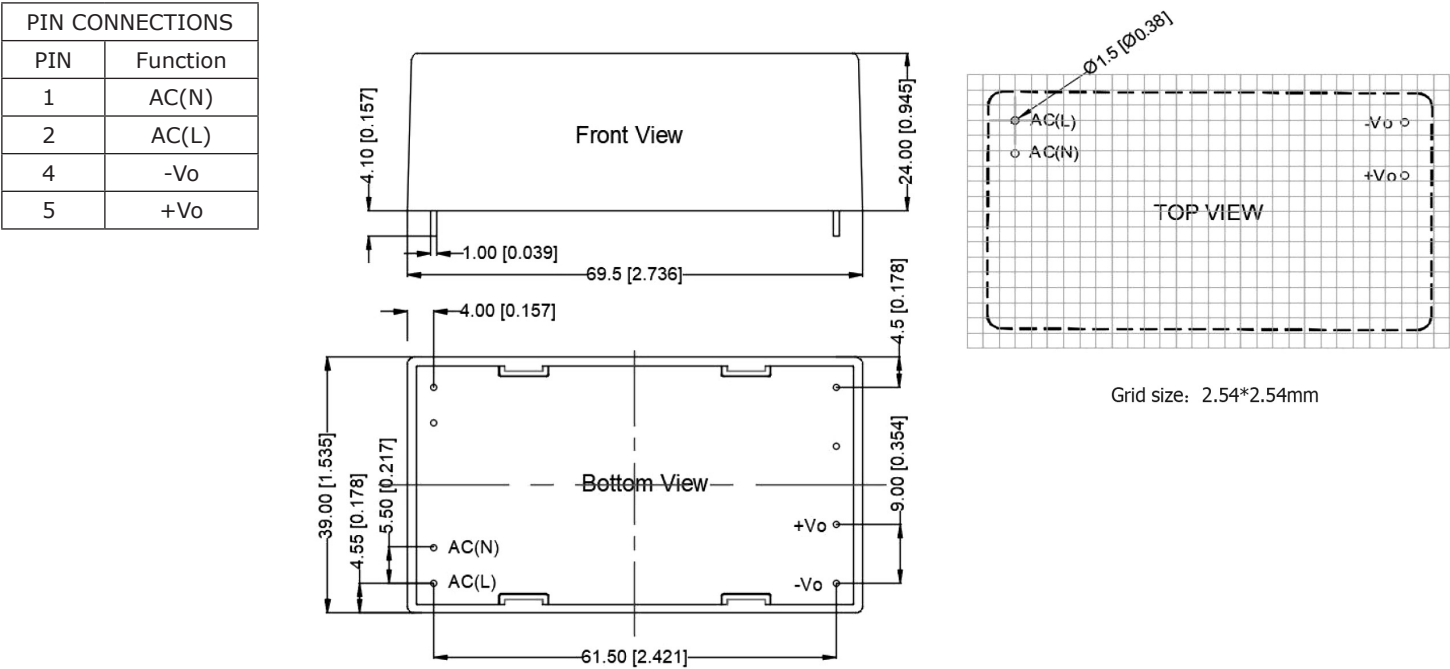

APPLICATION DESIGN REFERENCE

Figure 1

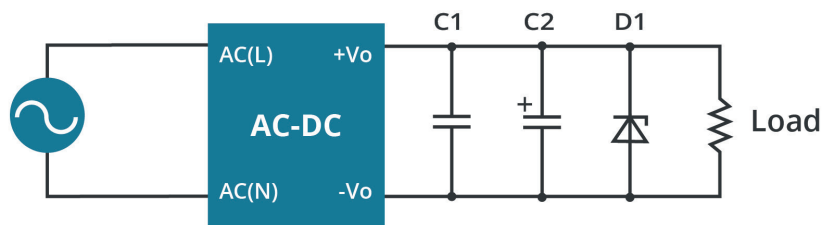


Table 1

Part No.	C1	C2	D1
PSK-30F-3.3/5	1 μ F/16V	220 μ F/16V	see note below
PSK-30F-9/12		100 μ F/25V	
PSK-30F-15/24	1 μ F/35V	100 μ F/35V	
PSK-30F-48	1 μ F/100V	10 μ F/63V	

Note: D1 is a TVS transistor that can protect the downstream circuit in case of module abnormalities. It is recommended to choose a model that is 1.2 times the output voltage.

EMC RECOMMENDED CIRCUIT

Figure 2


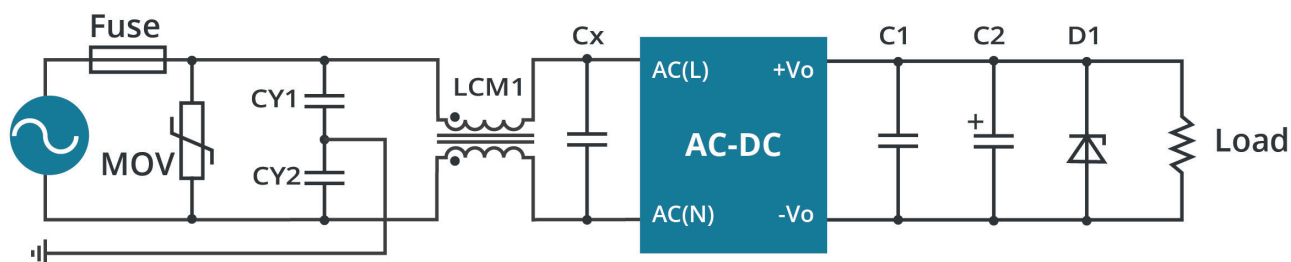


Figure 3

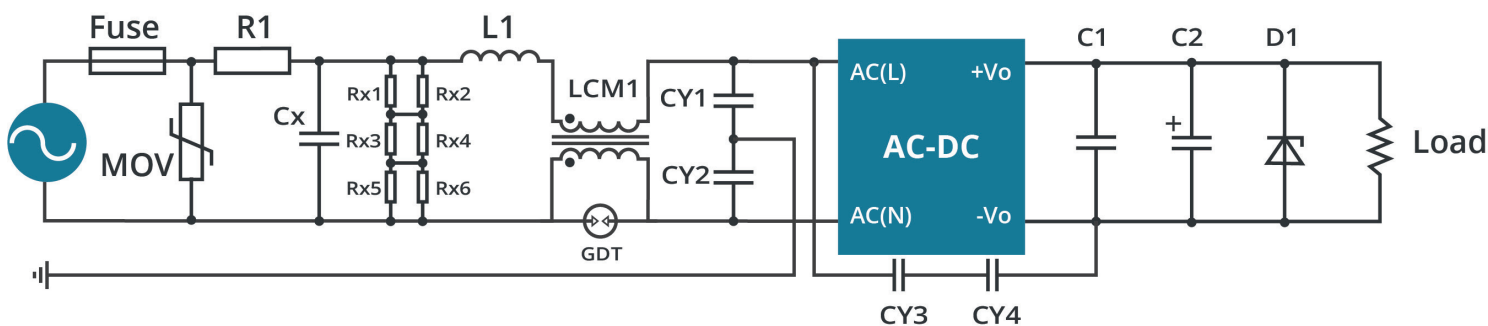

Note: When the output of the product needs to be connected to PE or connected to PE through Y capacitor. Recommended.

Table 2

Components	Recommended Value	Components	Recommended Value
FUSE	3.15A/300V, slow-blow, required	CY1, CY2	2.2nF/400Vac
MOV	14D561K	CY3, CY4	1.0nF/400Vac
R1	6.8 Ω /5W wire wound resistor, required	GDT	300V/1kA
Cx	0.33 μ F/305Vac	LCM	20mH, common mode inductance
L1	1.2mH, 0.5A	Rx1, Rx2, Rx3, Rx4, Rx5, Rx6	1.5M Ω /1206

Notes: 4. The input voltage should not exceed the specified range value, otherwise it may cause permanent and irreparable damage.
5. It is recommended to use at a load of over 5%. If the load is below 5%, the ripple index of the product may exceed the specifications, but it does not affect the reliability of the product.

REVISION HISTORY

rev.	description	date
1.0	initial release	09/19/2025

The revision history provided is for informational purposes only and is believed to be accurate.



15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383
Belfuse.com
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.