

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Primary-switched power supply unit TRIO POWER, Screw connection, CAN bus, Panel mounting, input: 1-phase, output: 24 V DC / 104 A, adjustable from 24 V DC ... 28 V DC

Product description

The TRIO POWER power supply units for panel mounting offer high power of up to 2.5 kW in a compact housing. With their flexible panel mounting and comprehensive functions, the robust power supply units can be used in a wide range of applications, such as machine building, robotics, or battery storage systems. The integrated O-ring diode enables a simple parallel connection and thus an increase in power without additional components. Extensive monitoring solutions via LEDs, a CAN bus interface, and remote access also facilitate monitoring and settings on the power supply unit.

Your advantages

- High power density and high efficiency with a compact design
- Robust and reliable due to dynamic boost with a powerful output characteristic curve
- Smart diagnostics with comprehensive monitoring via LED signaling and CAN bus interface
- Easy power increase with parallel connection with integrated O-ring diode
- Customized use through flexible panel mounting options

Commercial data

Item number	1635194
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CMHW13
Product key	CMHW13
GTIN	4067923157835
Weight per piece (including packing)	2,392 g
Weight per piece (excluding packing)	2,000 g
Customs tariff number	85044095
Country of origin	Country of origin will be provided upon delivery.

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Technical data

Input data

AC operation

Supply system configuration	Star network (TN, TT, IT (PE))
Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	100 V AC ... 240 V AC -15 % ... +10 % 100 V AC ... 240 V AC \pm 10 % (UL)
Derating	85 V AC ... 90 V AC (\leq 1350 W) 90 V AC ... 180 V AC (\leq 1500 W) 2.5 %/K, > 55 °C
Electric strength, max.	300 V AC 15 s
Typical national grid voltage	120 V AC 230 V AC
Voltage type of supply voltage	AC
Inrush current	< 15 A (115 V AC, 25 °C) < 40 A (230 V AC, 25 °C)
Inrush current integral (I^2t)	< 3364 A ² s
Frequency range (f_N)	50 Hz ... 60 Hz \pm 5 %
Mains buffering time	typ. 10 ms (120 V AC) typ. 10 ms (230 V AC@80% load)
Buffer time	typical 16 ms (120 V AC) typical 16 ms (230 V AC@80% load)
Current consumption	16.7 A (100 V AC) 20 A (85 V AC) 15 A (180 V AC) 11.7 A (230 V AC) max. 18 A (UL)
Protective circuit	Transient protection
Power factor (cos phi)	0.97 (230 V AC)
Device mains fuse	25 A internal (device protection)
Discharge current to PE	< 2 mA

DC operation

Input voltage range	140 V DC ... 340 V DC -15 %; +10 %
Current consumption	13.8 A (120 V DC) 7.6 A (350 V DC)

Output data

Efficiency	typ. 92 % (120 V AC) typ. 93.5 % (230 V AC)
Nominal output voltage	24 V DC
Setting range of the output voltage (U_{Set})	24 V DC ... 28 V DC (> 24 V DC, constant capacity restricted)

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Nominal output current (I_N)	104 A
Dynamic Boost ($I_{Dyn.Boost}$)	max. 145.8 A (5 s)
Short-circuit-proof	yes
No-load proof	yes
Crest factor	typ. 1.43 (120 V AC) typ. 1.44 (230 V AC)
Output power	max. 1500 W (< 180 V AC)
Output power (P_N)	2500 W
Output power ($P_{Dyn. Boost}$)	max. 3500 W (5 s)
Connection in parallel	yes, for increased efficiency and redundancy max. 4
Connection in series	yes, for increased output voltage (observe SELV limit) max. 2
Feedback voltage resistance	≤ 35 V DC
Protection against overvoltage at the output (OVP)	≤ 35 V DC
Residual ripple	typ. 240 mV _{PP} (maximum)
Control deviation	< 0.5 % (change in load, static 10 % ... 90 %) < 5 % (change in load, dynamic 10 % ... 90 %) < 0.5 % (change in input voltage ± 10 %)
Rise time	≤ 100 ms ($U_{Out} = 10$ % ... 90 %)
Minimum no-load power dissipation	< 17.67 W (120 V AC)
Maximum no-load power dissipation	< 10.75 W (230 V AC)
Minimum nominal load power dissipation	< 138.32 W (120 V AC)
Power loss nominal load max.	< 175.36 W (230 V AC)
Integrated fuse protection	no
Fuse protection (secondary side)	electronic

Connection data

Input

Position	1.x
----------	-----

Connection technology

Position marking	1.1 (L/+), 1.2 (N/-), 1.3 (\oplus
------------------	--------------------------------------

Conductor connection

Connection method	Screw connection
rigid	1.3 mm ² ... 3 mm ²
	2.5 mm ² (recommended)
flexible	1.3 mm ² ... 3 mm ²
	2.5 mm ² (recommended)
flexible with ferrule without plastic sleeve	1.3 mm ² ... 3 mm ²
	2.5 mm ² (recommended)
flexible with ferrule with plastic sleeve	1.3 mm ² ... 3 mm ²
	2.5 mm ² (recommended)

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

AWG	18 ... 12 (Cu)
	14 (recommended)
Stripping length	10 mm (Rigid/flexible/ferrule)
Tightening torque	1.13 Nm ... 1.47 Nm
	10 lb _F -in. ... 13 lb _F -in.

Output

Position	2.x
----------	-----

Connection technology

Position marking	2.1 (+), 2.2 (-)
------------------	------------------

Conductor connection

Connection method	Screw connection (Busbar)
rigid	0.2 mm ² ... 35 mm ²
	35 mm ² (recommended)
flexible	0.2 mm ² ... 35 mm ²
	35 mm ² (recommended)
AWG	6 ... 2 (Cu)
	2 (recommended)
Stripping length	10 mm (rigid/flexible/ring cable lug/fork-type cable lug)
Tightening torque	3 Nm

Signal, communication

Position	3.x, 4.x
----------	----------

Connection technology

Position marking	3.1 - 3.10, 4.1 - 4.10
------------------	------------------------

Conductor connection

Connection method	2x 10-pos. pin strip
rigid	0.1 mm ² ... 0.4 mm ²
	0.34 mm ² (recommended)
flexible	0.1 mm ² ... 0.4 mm ²
	0.34 mm ² (recommended)
flexible with ferrule without plastic sleeve	0.1 mm ² ... 0.4 mm ² (Cu)
	0.34 mm ² (recommended)
flexible with ferrule with plastic sleeve	0.1 mm ² ... 0.4 mm ²
	0.34 mm ² (recommended)
AWG	30 ... 22 (Cu)
	22 (recommended)

Interfaces

CAN-Bus

Interface	CAN bus
Number of interfaces	1

Connection method	10-pos. system connector
Supported protocols	CAN 2.0A, CAN 2.0B
Locking	Locking clip
Transmission physics	wired
Topology	Daisy Chain
Transmission speed	250 kbps
Transmission length	max. 20 m
Termination resistor	120 Ω (Terminating the end device)
Number of bus devices	max. 16

Signaling

LED signaling

Types of signaling	LED DC OK - signal state operation ($U_N = 24 \text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the operating state of the DC output voltage (DC OK)
Color	Red, green (multicolor LED)
LED off	Supply voltage input AC not present (Off)
LED on (green), DC OK	$U_{OutSet} \times 0.95 < U_{Out} < U_{OutSet} \times 1.05$ and $I_{Out} < I_N$ (On (green), DC OK)
LED on (flashing green)	$U_{OutSet} \times 1.05 < U_{Out} < U_{OutSet} \times 1.1$ or $U_{OutSet} \times 0.9 < U_{Out} < U_{OutSet} \times 0.95$ or $I_N < I_{Out} < I_N \times 1.1$ (on (flashing green))
LED on (red)	$U_{OutSet} \times 0.9 > U_{Out}$ or $U_{OutSet} \times 1.1 < U_{Out}$ or $I_{Out} > I_N \times 1.1$, continuously for 6 s (on (red))

LED signaling

Types of signaling	LED OVP - signal state operation ($U_N = 24 \text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the surge protection operating state (OVP)
Color	Red, green (multicolor LED)
LED off	Supply voltage input AC not present (Off)
LED on (green)	$U_{OUT} < U_{OutSet} \times 1.1$ (on (green))
LED on (flashing green)	$U_{OutSet} \times 1.1 < U_{Out} < OVP$ (on (flashing green))
LED on (red)	$U_{Out} > OVP$ (on (red))

LED signaling

Types of signaling	LED OCP - signal state operation ($U_N = 24 \text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the overcurrent protection operating state (OCP)
Color	Red, green (multicolor LED)
LED off	Supply voltage input AC not present (Off)
LED on (green)	$I_{Out} < I_N \times 1.1$ (on (green))
LED on (flashing green)	$I_N \times 1.1 < I_{Out} < I_N \times 1.3$ (on (flashing green))
LED on (red)	$I_{Out} > I_N \times 1.3$ continuously for 6 s (on (red))

LED signaling

Types of signaling	LED OTP - signal state operation ($U_N = 24 \text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the overtemperature protection operating state (OTP)

Color	Red, green (multicolor LED)
LED off	Supply voltage input AC not present
LED on (green)	$T_{Amb} < OTP - 10\text{ °C}$ (on (green))
LED on (flashing green)	$OTP - 10\text{ °C} < T_{Amb} < OTP$ (on (flashing green))
LED on (red)	$OTP < T_{Amb}$ (on (red))

LED signaling

Types of signaling	LED FAN - signal state operation ($U_N = 24\text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the operating state of the fan (in operation or malfunction)
Color	Red, green (multicolor LED)
LED on (green)	FAN normal operation (on (4 x LED green))
LED on (red)	FAN failure (on (4 x LED red))

LED signaling

Types of signaling	LED SCP - signal state operation ($U_N = 24\text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the short-circuit protection operating state (SCP)
Color	Red, green (multicolor LED)
LED on (flowing red)	Short circuit (on (4 x LED red continuous))

LED signaling

Types of signaling	LED Charging Mode – signal state operation ($U_N = 24\text{ V DC}$, $I_{Out} = I_N$)
Function	Visualization of the charging mode
Color	Red, green (multicolor LED)
LEDs on (green flashing)	Charging mode activated (on (4 x LED green flashing))

Signal state

State condition	$0.95 * U_{OutSet} < U_{Out} < 1.05 * U_{OutSet}$ and I_{OutN}
-----------------	--

Signal output DC OK

Position	4.x
Type of signaling	DC OK switch contact - signal state operation ($U_N = 24\text{ V DC}$, $I_{Out} = I_N$)
Position marking	4.1 (13), 4.2 (14)
Function	Operating state forwarding
Switch contact (floating)	OptoMOS
Switching voltage	max. 30 V DC (SELV)
Current carrying capacity	max. 10 mA
State condition (Contact closed)	$U_{out} < 18\text{ V DC}$ (Contact closed)
State condition (Contact open)	$U_{out} > 18\text{ V DC}$ (Contact open)

Electrical properties

Number of phases	1
Insulation voltage input/output	4 kV AC (type test)
	1.5 kV AC (routine test)

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Product properties

Product family	TRIO POWER
MTBF (IEC 61709, SN 29500)	> 500000 h (25 °C)
	> 250000 h (40 °C)
	> 100000 h (55 °C)
Environmental protection directive	RoHS Directive 2011/65/EU
	Reach

Insulation characteristics

Protection class	I
Degree of pollution	2

Life expectancy (electrolytic capacitors)

Temperature	25 °C
Additional text	8 years

Dimensions

Item dimensions

Width	108 mm
Height	41 mm
Depth	322 mm

Mounting

Mounting type	Panel mounting
Assembly note	Side mounting: 3x M4 screws - installation depth < 4 mm Back mounting: 4x M4 screws - installation depth < 3 mm Mounting with Assembly adapter UWA 20/13 (Item no. 1697537)
With protective coating	no

Material specifications

Flammability rating according to UL 94	V0 (Housing, terminal blocks)
Hood version	Aluminum (AlMg3)
Side element version	Aluminum

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 70 °C (>55 °C Derating: 3,33 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (start-up type tested)	-40 °C
Maximum altitude	≤ 5000 m
Maximum altitude (Output power derating)	> 2000 m (Derating: 10%/1000 m)
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Shock (operation)	11 ms, 15g, per spatial direction (IEC 60068-2-27)

Vibration (operation)	10 Hz ... 18.2 Hz, amplitude ± 0.75 mm (IEC 60068-2-6)
	18.2 Hz ... 150 Hz, 1g, 90 min.

Standards and regulations

Overvoltage category

EN 61010-1	III (≤ 2000 m)
	II (≤ 5000 m)

Overvoltage category

EN 61010-2-201	III (≤ 2000 m)
	II (≤ 5000 m)

Safety of power supply units up to 1100 V (insulation distances)

Standard designation	Safety of power supply units up to 1100 V (insulation distances)
Standards/specifications	DIN EN 61558-2-16

Electrical safety

Standard designation	Electrical safety
Standards/specifications	IEC 61010-2-201 (SELV)

Safety for measurement, control, and laboratory equipment

Standard designation	Safety for equipment for measurement, control, and laboratory use
Standards/specifications	IEC 61010-1

Protective extra-low voltage

Standard designation	Protective extra-low voltage
Standards/specifications	IEC 61010-1 (SELV)
	IEC 61010-2-201 (PELV)

Safe isolation

Standard designation	Safe isolation
Standards/specifications	IEC 61010-2-201

Limitation of harmonic line currents

Standard designation	Limitation of harmonic line currents
Standards/specifications	EN 61000-3-2

Mains variation/undervoltage

Standard designation	Mains variation/undervoltage
Standards/specifications	SEMI F47 - 0706

Approvals

UL

Identification	UL/C-UL Listed UL 61010-1
----------------	---------------------------

UL

Identification	UL/C-UL Listed UL 61010-2-201
----------------	-------------------------------

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

UL

Identification	UL/C-UL Approved UL 62368-1
----------------	-----------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
EMC requirements for noise emission	EN 61000-6-3
Noise immunity	Immunity in accordance with EN 61000-6-1 (residential), EN 61000-6-2 (industrial)

Conducted noise emission

Standards/regulations	EN 55016 EN 61000-6-4 (Class A)
-----------------------	------------------------------------

Noise emission

Standards/regulations	EN 55016 EN 61000-6-4 (Class A)
-----------------------	------------------------------------

Harmonic currents

Standards/regulations	EN 61000-3-2 EN 61000-3-2 (Class A)
Frequency range	0 kHz ... 2 kHz

Flicker

Standards/regulations	EN 61000-3-3 EN 61000-3-3
-----------------------	------------------------------

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	4 kV (Test Level 3)
Discharge in air	8 kV (Test Level 3)
Comments	Criterion A

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m (Test Level 3)
Frequency range	1 GHz ... 6 GHz
Test field strength	10 V/m (Test Level 3)
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Fast transients (burst)

Input	asymmetrical 2 kV (Test Level 3)
Output	asymmetrical 2 kV (Test Level 3)
Signal	asymmetrical 1 kV (Test Level 3)
Comments	Criterion B

Surge voltage load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge voltage load (surge)

Input	symmetrical 2 kV (Test Level 4)
	asymmetrical 4 kV (Test Level 4)
Output	symmetrical 0.5 kV (Test Level 2)
	asymmetrical 1 kV (Test Level 2)
Signal	asymmetrical 1 kV (Test Level 2)
Comments	Criterion B

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

Input/output/signal	asymmetrical
Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V (Test Level 3)

Voltage dips

Standards/regulations	EN 61000-4-11
Voltage	230 V AC
Frequency	50 Hz
Voltage dip	70 %
Number of periods	25 periods
Additional text	Class 3
Comments	Criterion A
Voltage dip	40 %
Number of periods	10 periods
Additional text	Class 3
Comments	Criterion B
Voltage dip	0 %
Number of periods	1 period
Additional text	Class 3
Comments	Criterion A

Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected

TRIO-PM/1AC/24DC/2500W - Power supply



1635194


<https://www.phoenixcontact.com/gb/products/1635194>

	by the device itself.
Criterion C	Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements.

Drawings

Schematic diagram

Housing

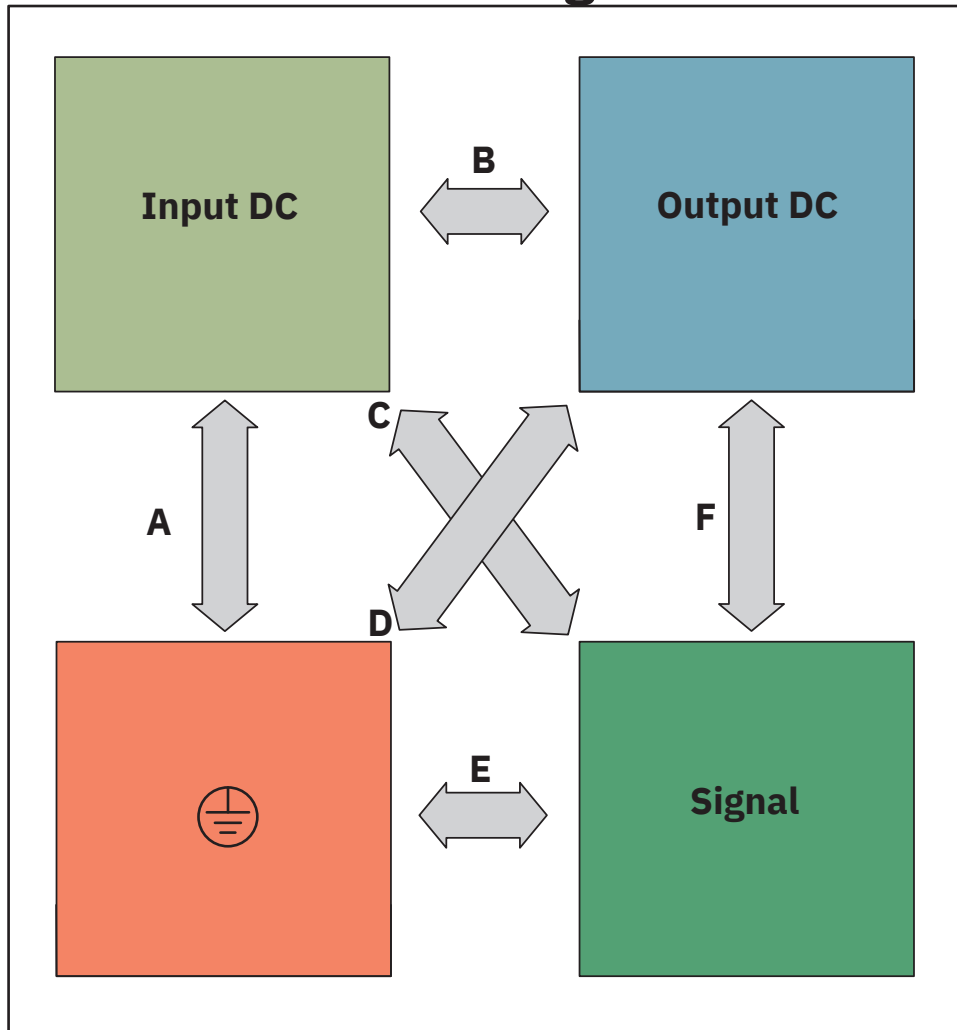

Test sections, insulation voltage


TRIO-PM/1AC/24DC/2500W - Power supply



1635194


<https://www.phoenixcontact.com/gb/products/1635194>

Schematic diagram

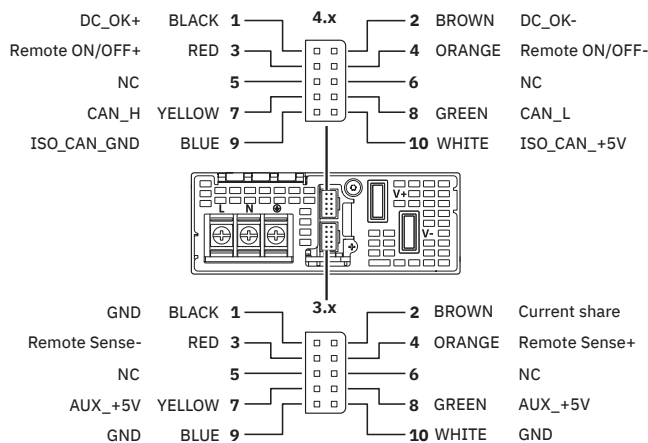


Signal assignment for data cable


Diagram

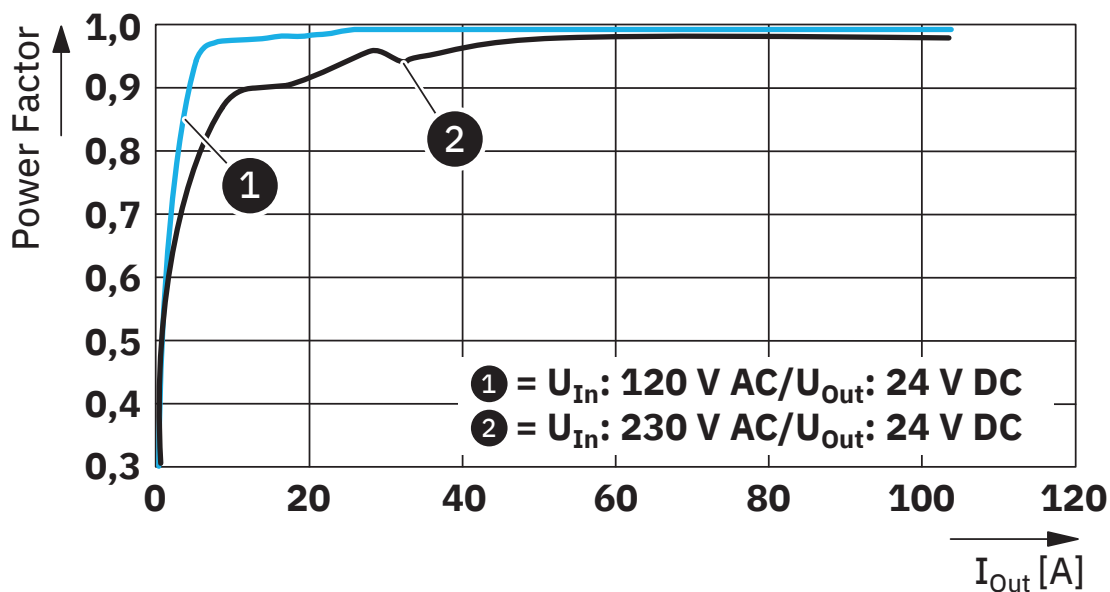

Power factor

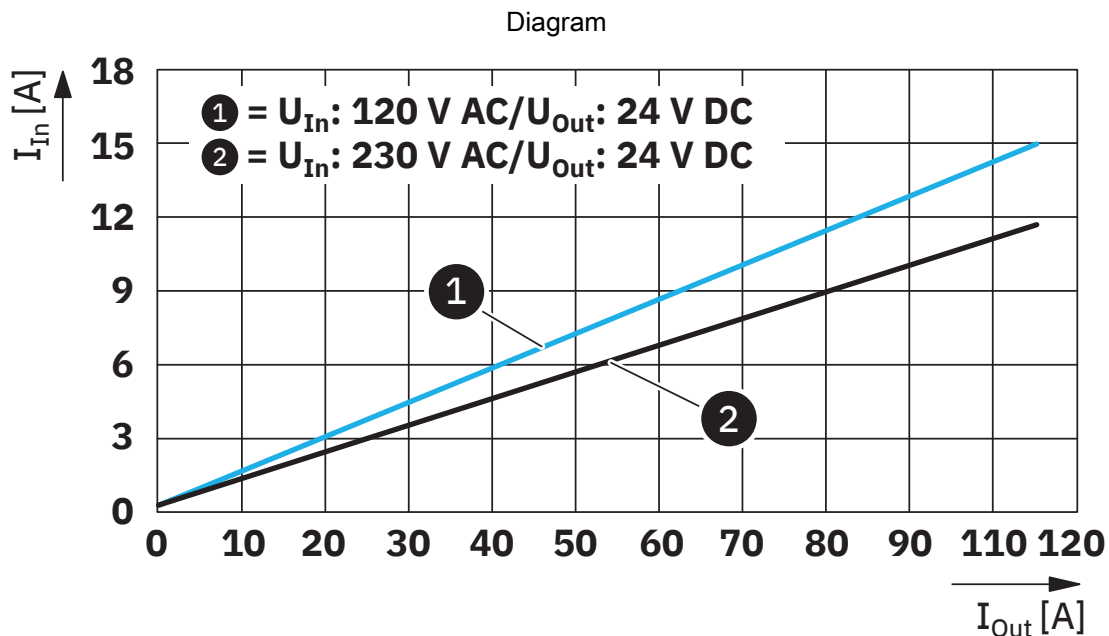

Input current/output current

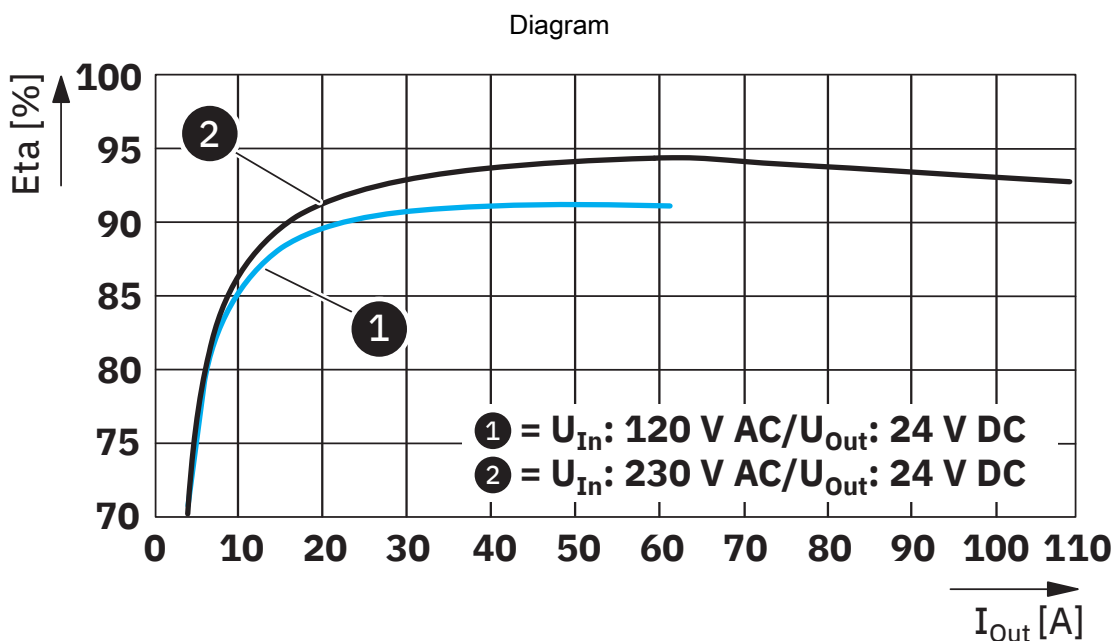


Efficiency

1635194


<https://www.phoenixcontact.com/gb/products/1635194>

Diagram

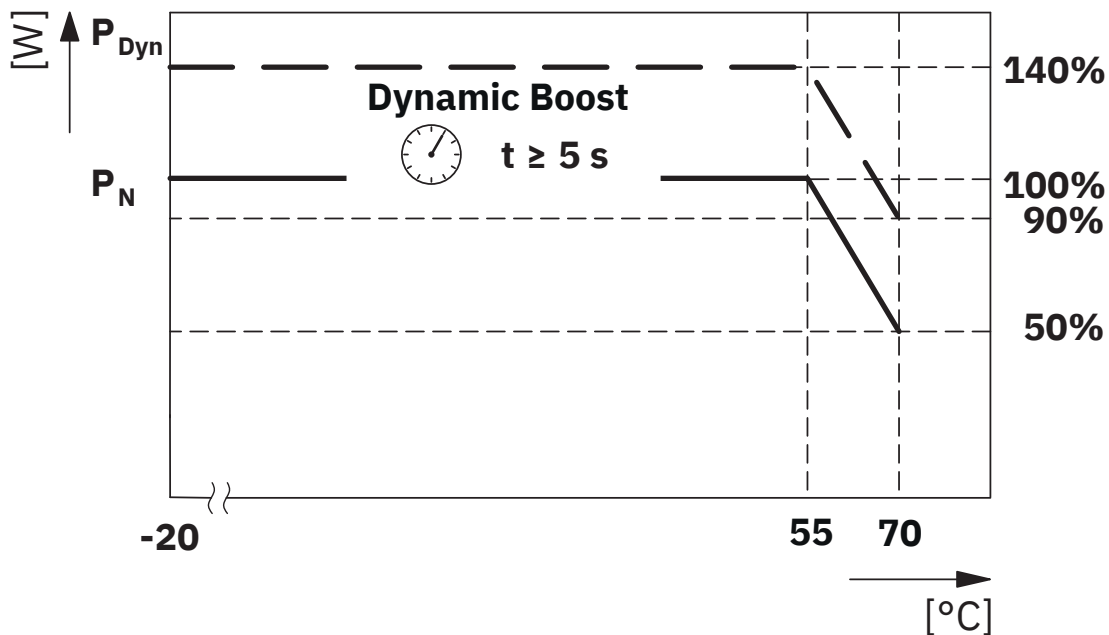

Temperature-dependent derating

Diagram

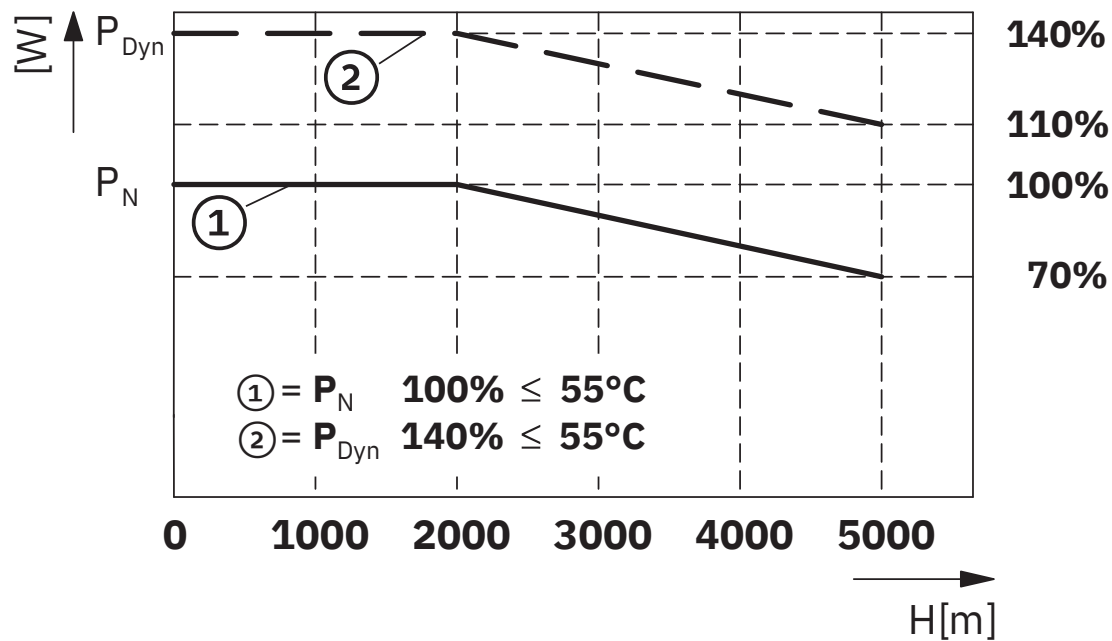

Altitude-dependent derating


TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Block diagram

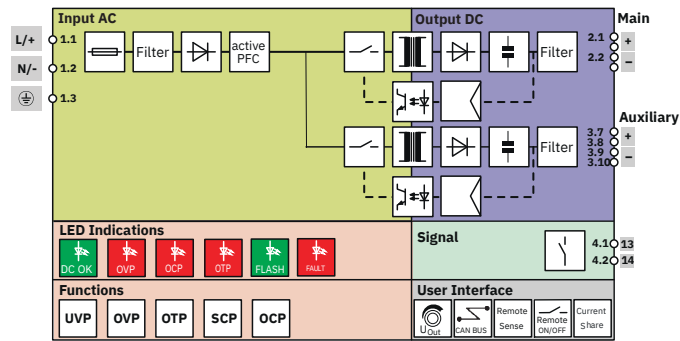

Block diagram

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1635194>



IECEE CB Scheme
Approval ID: DK-149995-UL



cULus Recognized
Approval ID: E211944-20240314



cULus Listed
Approval ID: E123528-20240426

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Classifications

ECLASS

ECLASS-13.0	27040701
ECLASS-15.0	27040701

ETIM

ETIM 10.0	EC002540
-----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

TRIO-PM/1AC/24DC/2500W - Power supply



1635194

<https://www.phoenixcontact.com/gb/products/1635194>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
-------------------------------------	----------------------

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk