

Cornell Dubilier

Engineering

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Catalog Number: DCMX391T450AB2B

Customer Part Number: _____

Date: 1/20/2023

Capacitance: 390 μ F

Tolerance: - 10% + 50%

Working Volts: 450 VDC

Surge Volts: 500 VDC

Leakage Current @ 25°C: 2513 μ A

ESR @ 120 Hz @ 25°C: 0.333 Ω max.

Ripple Current @ 120 Hz, 85°C: 1.67A

Diameter (D): 1.375 $\pm$ 0.031 inches

Length (L): 3.125 $\pm$ 0.062 inches


Total Length, W/Insulation (TL): 3.376 $\pm$ 0.062 inches

Terminal Spacing (S): 0.500 $\pm$ 0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

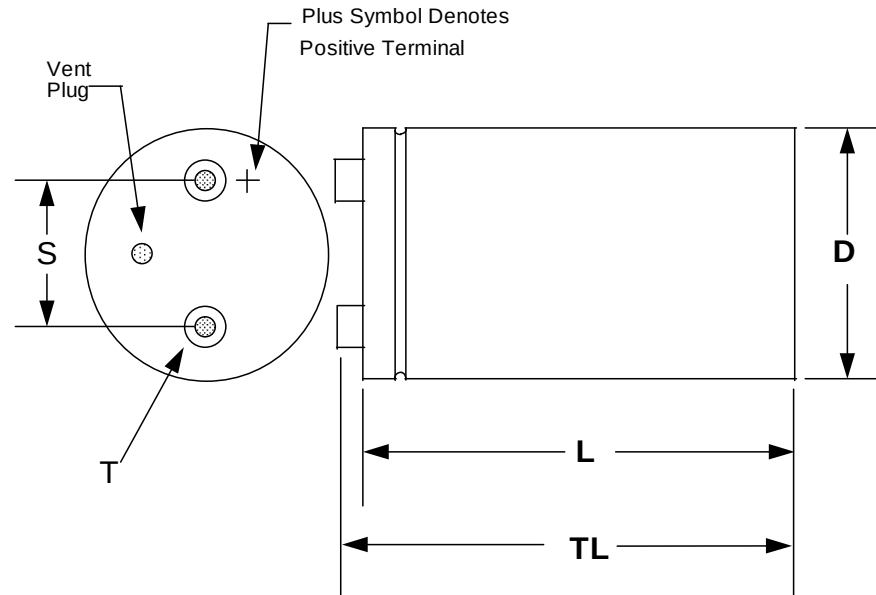

ROHS Compliant for all date codes after "0513",
Per provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped
in Red, Otherwise considered as an "Uncontrolled Copy"