


Item (Detail view)

Socket with miniature switching relay; AC/DC 115 V; Relay with 1 changeover contact (1u); for normal switching power

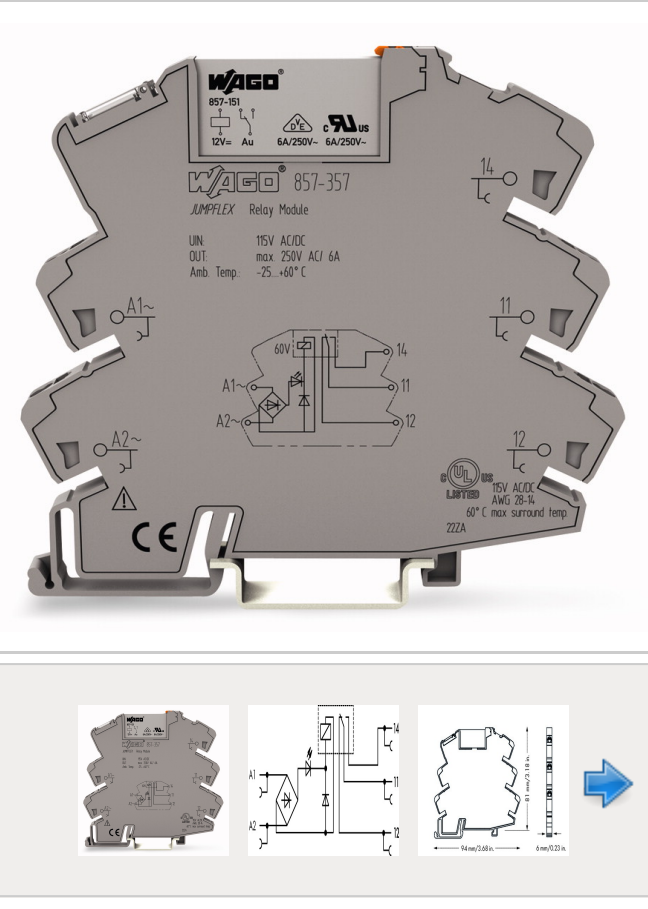

Item no.	857-357	GTIN / EAN	4045454694029
Content	1 piece	Order unit	piece
Order quantity	1	Increase in order quantity	(1, 2, 3, 4, ...)
Customer item no.		Customs Tariff no.	8536490090
Customs duty for the country of origin	CN	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company. Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ☒ Compliant

Article details																																																																																																
Approvals																																																																																																
Downloads/Certificates																																																																																																
Accessories																																																																																																
Description Remarks	Socket with miniature switching relay; AC/DC 115 V; Relay with 1 changeover contact (1u); for normal switching power																																																																																															
	Note: Inductive loads have to be attenuated by an appropriate protective circuit in order to protect relay coils and contacts.																																																																																															
Item properties																																																																																																
	Miscellaneous <table><thead><tr><th>Name</th><th>Value</th><th>Unit</th></tr></thead><tbody><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td><td></td></tr><tr><td>Solid conductor</td><td>0.34 ... 2.5 mm² / 22 ... 14 AWG</td><td></td></tr><tr><td>Fine-stranded conductor</td><td>0.34 ... 2.5 mm² / 22 ... 14 AWG</td><td></td></tr><tr><td>Strip length</td><td>9 ... 10 mm / 0.35 ... 0.39 Inch</td><td></td></tr><tr><td>Width</td><td>6 mm / 0.236 in</td><td></td></tr><tr><td>Height from upper-edge of DIN-35 rail</td><td>61 mm / 3.189 in</td><td></td></tr><tr><td>Depth</td><td>94 mm / 3.701 in</td><td></td></tr><tr><td>Type of mounting</td><td>DIN-35 rail</td><td></td></tr><tr><td>Color</td><td>gray</td><td></td></tr><tr><td>Fire load [MJ]</td><td>0.481</td><td>MJ</td></tr><tr><td>Weight [g]</td><td>31.47</td><td>g</td></tr><tr><td>Permissible surrounding air (operating) temperature at U</td><td>-40 ... 60 °C</td><td></td></tr><tr><td>Surrounding air (storage) temperature</td><td>-40 ... 70 °C</td><td></td></tr><tr><td>Processing temperature</td><td>-25 ... 50 °C</td><td></td></tr><tr><td>Standards/specifications</td><td>EN 61010-2-201; EN 61810-1; EN 61373; UL 508; ATEX, IEC Ex</td><td></td></tr><tr><td>WAGO elementary relay</td><td>857-155</td><td></td></tr><tr><td>Packaging type</td><td>BOX</td><td></td></tr><tr><td>Main product function</td><td>Relay module</td><td></td></tr><tr><td>Product type</td><td>Relay modules</td><td></td></tr><tr><td>Number of changeover contacts</td><td>1</td><td></td></tr><tr><td>Number of make contacts</td><td>1</td><td></td></tr><tr><td>Number of break contacts</td><td>1</td><td></td></tr><tr><td>Min. nominal input voltage (AC) [V]</td><td>AC115</td><td>V</td></tr><tr><td>Max. nominal input voltage (AC) [V]</td><td>AC115</td><td>V</td></tr><tr><td>Min. nominal input voltage (DC) [V]</td><td>DC115</td><td>V</td></tr><tr><td>Max. nominal input voltage (DC) [V]</td><td>DC115</td><td>V</td></tr><tr><td>Max. input voltage (AC) [V]</td><td>138</td><td>V</td></tr><tr><td>Min. input voltage (AC) [V]</td><td>92</td><td>V</td></tr><tr><td>Max. input voltage (DC) [V]</td><td>138</td><td>V</td></tr><tr><td>Min. input voltage (DC) [V]</td><td>92</td><td>V</td></tr><tr><td>Switching voltage (max.) AC [V]</td><td>AC250</td><td>V</td></tr></tbody></table>	Name	Value	Unit	Connection technology	Push-in CAGE CLAMP®		Solid conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG		Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG		Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch		Width	6 mm / 0.236 in		Height from upper-edge of DIN-35 rail	61 mm / 3.189 in		Depth	94 mm / 3.701 in		Type of mounting	DIN-35 rail		Color	gray		Fire load [MJ]	0.481	MJ	Weight [g]	31.47	g	Permissible surrounding air (operating) temperature at U	-40 ... 60 °C		Surrounding air (storage) temperature	-40 ... 70 °C		Processing temperature	-25 ... 50 °C		Standards/specifications	EN 61010-2-201; EN 61810-1; EN 61373; UL 508; ATEX, IEC Ex		WAGO elementary relay	857-155		Packaging type	BOX		Main product function	Relay module		Product type	Relay modules		Number of changeover contacts	1		Number of make contacts	1		Number of break contacts	1		Min. nominal input voltage (AC) [V]	AC115	V	Max. nominal input voltage (AC) [V]	AC115	V	Min. nominal input voltage (DC) [V]	DC115	V	Max. nominal input voltage (DC) [V]	DC115	V	Max. input voltage (AC) [V]	138	V	Min. input voltage (AC) [V]	92	V	Max. input voltage (DC) [V]	138	V	Min. input voltage (DC) [V]	92	V	Switching voltage (max.) AC [V]	AC250
Name	Value	Unit																																																																																														
Connection technology	Push-in CAGE CLAMP®																																																																																															
Solid conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG																																																																																															
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG																																																																																															
Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch																																																																																															
Width	6 mm / 0.236 in																																																																																															
Height from upper-edge of DIN-35 rail	61 mm / 3.189 in																																																																																															
Depth	94 mm / 3.701 in																																																																																															
Type of mounting	DIN-35 rail																																																																																															
Color	gray																																																																																															
Fire load [MJ]	0.481	MJ																																																																																														
Weight [g]	31.47	g																																																																																														
Permissible surrounding air (operating) temperature at U	-40 ... 60 °C																																																																																															
Surrounding air (storage) temperature	-40 ... 70 °C																																																																																															
Processing temperature	-25 ... 50 °C																																																																																															
Standards/specifications	EN 61010-2-201; EN 61810-1; EN 61373; UL 508; ATEX, IEC Ex																																																																																															
WAGO elementary relay	857-155																																																																																															
Packaging type	BOX																																																																																															
Main product function	Relay module																																																																																															
Product type	Relay modules																																																																																															
Number of changeover contacts	1																																																																																															
Number of make contacts	1																																																																																															
Number of break contacts	1																																																																																															
Min. nominal input voltage (AC) [V]	AC115	V																																																																																														
Max. nominal input voltage (AC) [V]	AC115	V																																																																																														
Min. nominal input voltage (DC) [V]	DC115	V																																																																																														
Max. nominal input voltage (DC) [V]	DC115	V																																																																																														
Max. input voltage (AC) [V]	138	V																																																																																														
Min. input voltage (AC) [V]	92	V																																																																																														
Max. input voltage (DC) [V]	138	V																																																																																														
Min. input voltage (DC) [V]	92	V																																																																																														
Switching voltage (max.) AC [V]	AC250	V																																																																																														

Upwards