


## Data Sheet | Item Number: 294-5453

Lighting connector; push-button, external; with screw-type ground contact; 3-pole;  
Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm<sup>2</sup>; Sur-  
rounding air temperature: max 85°C (T85); white

<https://www.wago.com/294-5453>



Color: ■ white

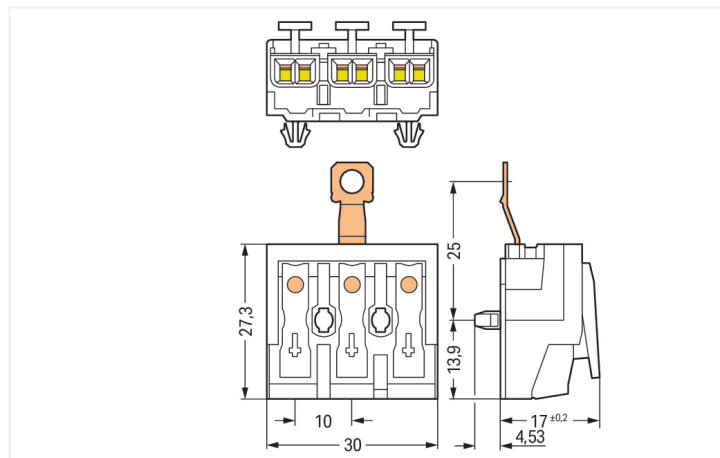

Dimensions in mm

Field-wiring terminal block, 294 Series, push-button

Our field-wiring terminal block (item number 294-5453) simplifies electrical installations. Conductors can only be connected to this field-wiring terminal block if their strip length is between 8 and 9 mm. This product incorporates four conductor terminals and utilizes Push-in CAGE CLAMP® and PUSH WIRE®. Our Push-in CAGE CLAMP® is a universal, maintenance-free connection solution for all conductor types, offering a key advantage: both solid and fine-stranded conductors with ferrules can be directly inserted without the need for tools or any preparation, such as crimping the ferrule. Our PUSH WIRE® connection uses the stiffness of the conductor to overcome the clamping spring's contact force, allowing you to clamp the conductor in place more quickly and easily. The item's dimensions are (30 x 21.53 x 27.3) mm (width x height x depth). Depending on the type of conductor, this field-wiring terminal block is ideal for conductor cross sections ranging from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> on one side and for conductor cross sections from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> on the other side as well as conductor cross sections from 0.5 mm<sup>2</sup> to 1.5 mm<sup>2</sup> and from 0.5 mm<sup>2</sup> to 0.75 mm<sup>2</sup>.

Tin is used for coating the contact surfaces.

### Electrical data

Ratings per	IEC/EN 60998-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings per	IEC/EN 60998-2-2		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

### Ratings per IEC/EN – Notes

Ratings (note) Connection points

### General information

Wiring direction Side-entry wiring

## Connection Data

Clamping units	15
Total number of potentials	3
Number of connection types	4
PE function	Screw-type PE contact

### Connection 1

Connection type	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm <sup>2</sup> / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	3

### Connection 2

Connection type	Internal 2
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Connection 3

Connection type	Internal 3
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 1.5 mm <sup>2</sup> / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 0.75 mm <sup>2</sup> / 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1 mm <sup>2</sup> / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Connection 4

Connection type	Internal 4
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 0.75 mm <sup>2</sup> / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

## Physical data

Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height	21.53 mm / 0.848 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

### Mechanical data

Marking	1-⊖-N
Mounting type	Snap-in foot

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	white
Material group	IIIa
Insulation material (main housing)	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.14 MJ
Halogen-free	Yes
Weight	9.9 g

### Environmental requirements

Temperature stability	120 °C
T marking	T85

### Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098638
Customs tariff number	85369010000

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 9.0	EC001284
ETIM 10.0	EC001284
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	b07dea60-f8dc-4504-8f3e-d2f9aca6cd72
SCIP notification number (Belgium)	0b4b4775-e15d-4a9d-8171-4ac406b2e266
SCIP notification number (Bulgaria)	eb7f0b42-c0cd-4c10-8d43-4cc0055ad23d
SCIP notification number (Czech Republic)	a6e58874-f2a0-4929-b3b1-1d8d4fac9463
SCIP notification number (Denmark)	7740500d-8914-4a76-907a-8db68b637a81
SCIP notification number (Finland)	fc878fec-edb1-4182-9052-7c107ea94995
SCIP notification number (France)	d8057d09-9458-46d6-af4a-c1d7af6964b2
SCIP notification number (Germany)	ce8a34d9-a104-48d7-b477-1ce0314fd92b
SCIP notification number (Hungary)	eaf7be04-d431-4e25-a8a8-b1450375041a
SCIP notification number (Italy)	67be43ad-a1a5-4039-bf54-7203793eb306
SCIP notification number (Netherlands)	c9ddd09e-67b3-402c-8172-fb959ca61515
SCIP notification number (Poland)	ecf0b7e6-2738-4d5f-af50-14e958d4fa9b
SCIP notification number (Romania)	d08de013-c663-4c10-a61c-9344c8d67431

**Environmental Product Compliance**

SCIP notification number (Sweden)	91d8366b-fb2e-457d-8b16-6dc1b0b47f64
-----------------------------------	--------------------------------------

**Approvals / Certificates**

**General approvals**



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

**Declarations of conformity and manufacturer's declarations**

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 294-5453 <a href="#">↓</a>

**Documentation**

Bid Text			
294-5453	13.06.2017	doc 28.00 KB	<a href="#">↓</a>
294-5453	19.02.2019	xml 5.58 KB	<a href="#">↓</a>

**CAD/CAE-Data**

CAD data
2D/3D Models 294-5453 <a href="#">↓</a>

CAE data
WSCAD Universe 294-5453 <a href="#">↓</a>
ZUKEN Portal 294-5453 <a href="#">↓</a>

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Strain relief

##### 1.1.1.1 Strain relief



**Item No.: 294-370**

Strain relief; for 294 Series; with snap-in mounting feet; white

**Item No.: 294-375**

Strain relief; for 294 Series; without snap-in mounting feet; white

##### 1.1.1.2 Strain relief plate



**Item No.: 294-364**

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

**Item No.: 294-384**

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

### 1.1.2 Tool

#### 1.1.2.2 Operating tool






**Item No.: 206-294**

Disconnection tool; green

## Installation Notes

### Installation




3-pole – with screw-type ground contact,  $d \leq 4.1 \text{ mm}$

Snap-in foot


Drilled hole for snap-in mounting foot

## Conductor termination



EUROPE	
1 x 0.5 ... 2.5 mm <sup>2</sup> "S"	
1 x 0.5 ... 1.5 mm <sup>2</sup> "S"	
1 x 0.5 ... 0.75 mm <sup>2</sup> "S"	
AMERICA	
1 x AWG 18 ... 14 "S"	
1 x AWG 18 ... 16 "S"	
1 x AWG 18 "S"	
JAPAN	
1 x 0.8 ... 1.6 mm diam. "S"	
1 x 0.8 ... 1 mm diam. "S"	
1 x 0.8 mm diam. "S"	

EUROPE	
2 x 0.5 ... 2.5 mm <sup>2</sup> "S, str, f-str"	
AMERICA	
2 x AWG 18 ... 12 "S"	
2 x AWG 18 ... 14 "S, f-str"	
JAPAN	
2 x 0.8 ... 2 mm diam. "S"	
2 x 0.5 ... 2 mm <sup>2</sup> "str, f-str"	



**Internal connection:**  
PUSH WIRE® for internal wiring with solid conductors

**External connection:**  
Push-in CAGE CLAMP® for field-wiring with all conductor types

### Conductor termination



Terminating five conductors per pole – solid and fine-stranded.

