

GYG

Chip Type, 125°C High Reliability



For SMD



High Ripple Current





Low Impedance



Long Life

NEW

- High Reliability, Low ESR, High ripple current.
- Long life of 4000 hours at 125°C, High Capacitance.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.

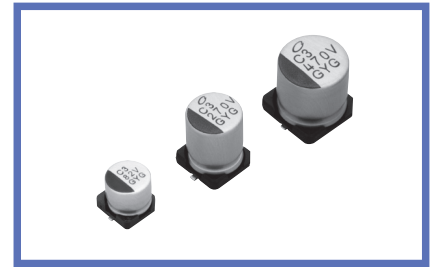


Specifications

Item	Performance Characteristics									
Category Temperature Range	-55 to +125°C									
Rated Voltage Range	25 to 35V									
Rated Capacitance Range	82 to 680μF									
Capacitance Tolerance	± 20% at 120Hz, 20°C									
Tangent of loss angle (tan δ)	<table><tr><td>Rated voltage (V)</td><td>25</td><td>35</td></tr><tr><td>tan δ (max.)</td><td>0.14</td><td>0.12</td></tr></table>			Rated voltage (V)	25	35	tan δ (max.)	0.14	0.12	120Hz 20°C
Rated voltage (V)	25	35								
tan δ (max.)	0.14	0.12								
ESR	Less than or equal to the specified value at 100kHz, 20°C									
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV(μA).									
Temperature Characteristics (Max.Impedance Ratio)	Z (-25°C) / Z (+20°C) ≤ 2 Z (-55°C) / Z (+20°C) ≤ 2.5 (100kHz)									
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 4000 hours at 125°C, the peak voltage shall not exceed the rated voltage.	Capacitance change	Within ± 30% of initial capacitance value							
		tan δ	200% or less of the initial specified value							
		ESR	200% or less of the initial specified value							
		Leakage current	Less than or equal to the initial specified value							
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.									
Damp Heat (Steady State)	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C, 85% RH.	Capacitance change	Within±30% of the initial capacitance value							
		tan δ	200% or less of the initial specified value							
		Leakage current	Less than or equal to the initial specified value							
Resistance to Soldering Heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.	Capacitance change	Within±10% of the initial capacitance value							
		tan δ	Less than or equal to the initial specified value							
		Leakage current	Less than or equal to the initial specified value							
Marking	Black print on the case top.									


※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

Dimensions


(φ6.3) 【Standard】

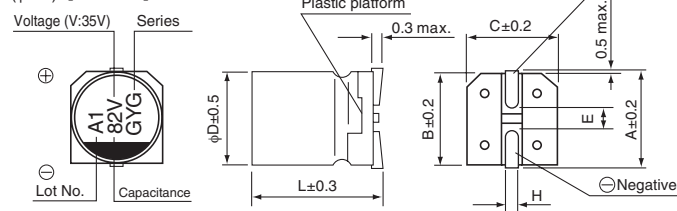

(φ8, φ10) 【Standard】

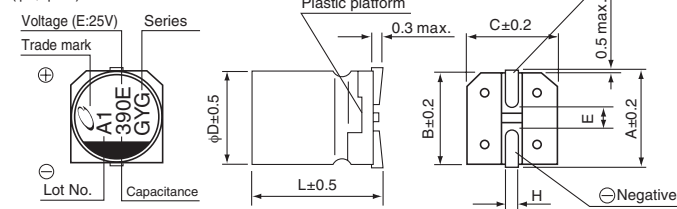



(φ8, φ10) 【Vibration Resistance】

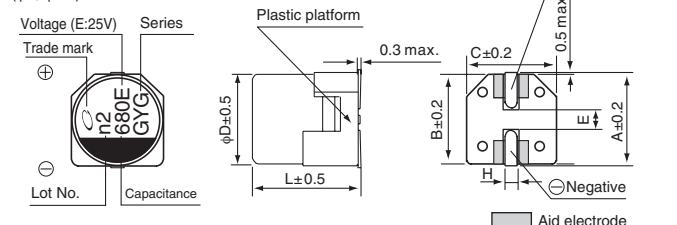

■ Aid electrode

Type numbering system (Example : 35V 82μF)

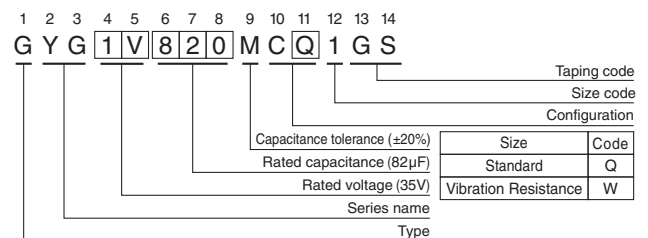

Standard				Vibration Resistance			
		(mm)				(mm)	
	A	6.3 × 5.8	8 × 10	10 × 10	A	9.0	11.0
	B	6.6	8.3	10.3	B	8.3	10.3
	C	6.6	8.3	10.3	C	8.3	10.3
	E	2.2	3.1	4.5	E	3.1	4.5
	L	5.8	10.3	10.3	L	10.5	10.5
	H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	H	1.1 to 1.5	1.1 to 1.5

Voltage

Code

V

25

35

E

V

Frequency coefficient of rated ripple current

Frequency	120Hz	1kHz	10kHz	100kHz or more
Coefficient	0.15	0.40	0.75	1.00

● Dimension table in next page.

GYG
■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D $\times$ L (mm)	$\tan \delta$	Leakage Current (μ A) (at 20°C after 2 minutes)	ESR (m Ω) max. (20°C/100kHz)	Rated Ripple (mA _{rms}) (125°C/100kHz)	Part Number
25 (1E)	120	6.3 $\times$ 5.8	0.14	30.0	50	1400	GYG1E121MC□1GS
	390	8 $\times$ 10	0.14	97.5	22	2900	GYG1E391MC□1GS
	680	10 $\times$ 10	0.14	170.0	20	3300	GYG1E681MC□1GS
35 (1V)	82	6.3 $\times$ 5.8	0.12	28.7	55	1400	GYG1V820MC□1GS
	270	8 $\times$ 10	0.12	94.5	22	2900	GYG1V271MC□1GS
	470	10 $\times$ 10	0.12	164.5	20	3300	GYG1V471MC□1GS

□ : Enter the appropriate configuration code.

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.