

75W Convection cooled

AC-DC power supplies 

The LBA75 series of compact, convection-cooled 75W AC-DC power supplies are designed to deliver quiet, consistent performance across a wide range of industrial technology applications. With a wide input range, regulated single output voltages from 5V to 48VDC and output voltage adjustment, the LBA75 series provides engineers with a versatile and robust power platform suitable for demanding industrial environments.


Featuring Class B conducted and radiated emissions, worldwide ITE safety approvals, wide temperature range, compact footprint, a power "ON" LED and an integrated connector cover, the LBA75 is designed for easy integration into applications including auxiliary power units, security and surveillance systems, industrial automation, lighting control, smart home and building control equipment.



Features

- ▶ 75W convection cooled
- ▶ Universal, single phase input: 90 to 264VAC
- ▶ Regulated single outputs from 5V to 48VDC
- ▶ ITE safety approvals
- ▶ Class B conducted & radiated emissions
- ▶ Integrated connector cover
- ▶ Output voltage trim
- ▶ Efficiency, up to 86%
- ▶ Short circuit, overvoltage & overload protection
- ▶ LED power ON status indicator
- ▶ -30°C to +70°C operating temperature
- ▶ 3 year warranty

Applications

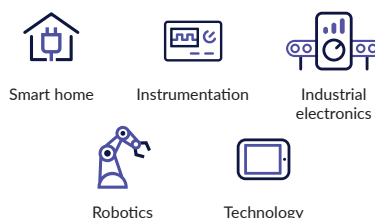

Dimensions

99.0 x 97.0 x 30.0 mm (3.89" x 3.82" x 1.18")

Documentation

For further information click the link or scan the code

→ xppower.com



Models & ratings

Model number	Output voltage		Output current	Ripple & noise pk to pk ⁽¹⁾	Efficiency ⁽²⁾	Maximum capacitive load	Power
	Nominal	Adjustment range ⁽³⁾					
LBA75US05	5.0V	4.5 - 5.5V	12.0A	100mV	83%	6000μF	60W
LBA75US12	12.0V	10.8 - 13.2V	6.0A	120mV	85%	3600μF	72W
LBA75US15	15.0V	13.5 - 16.5V	5.0A	120mV	85%	3000μF	75W
LBA75US24	24.0V	21.6 - 26.4V	3.1A	150mV	85%	1200μF	75W
LBA75US48	48.0V	44.0 - 52.0V	1.6A	250mV	86%	90μF	75W

Notes:

1. Ripple & noise measured with 20MHz bandwidth and using 20±2cm twisted pair-wire terminated with 47μF electrolytic capacitor in parallel with 0.1μF ceramic capacitor.
2. Typical efficiencies measured at 230VAC full load.
3. The total output power must not exceed the rated output power.

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Input voltage - operating	90	115/230	264	VAC	Derate output power linearly from 100% at 100VAC to 80% at 90VAC.
Input frequency	47	50/60	63	Hz	
Input current			2.0	A	115VAC full load
			1.0		230VAC full load
No load input power			0.9	W	
Inrush current			40	A	115VAC cold start at +25°C ambient
			85		230VAC cold start at +25°C ambient
Earth leakage current			0.75	mA	240VAC / 50Hz
Input protection	T3.15A/250VAC Internal fuse fitted in line				

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions	
Output voltage	5		48	VDC	See Models & Ratings table	
Initial set accuracy			±2	%	Full load	LBA75US05
			±1			All other models
Voltage adjustment	See Models & Ratings table					
Minimum load	0			A	No minimum load required	
Start up time			2.5	s	115 & 230VAC full load at +25°C	
Rise time			50	ms	115 & 230VAC full load	
Hold up time	12/20			ms	115 / 230VAC full load	
Drift			±0.03	%	After 20 minutes warm up, 230VAC, 0°C to +50°C	
Line regulation			±0.5	%	100-264VAC, full load	
Load regulation			2	%	From 0-100% load	LBA75US05
			1			All other models
Transient response			4	%	Recovery within 1% in less than 0.5ms for a 50-75% and 75-50% load step	
Ripple & noise	See Models & Ratings table					
Over / Undershoot			10	%	Full load	
Overvoltage protection	110		140	%	5V-24V models	Protection type: Clamp, auto recovery
			60	V	48V model	
Overload protection	110		160	%	Nominal output current, auto recovery	
Temperature coefficient		±0.03		%/°C	0 to +50°C	
Short circuit protection	Continuous hiccup with auto recovery					

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Efficiency	See Models & Ratings table				
Isolation: input to output	3000			VAC	Class I construction
input to ground	1800			VAC	
output to ground	500			VAC	
Switching frequency		65		kHz	Full load
Power density			0.2612 (4.28)	W/cm ³ (W/in ³)	
Mean time between failure	300			khrs	MIL-HDBK-217F, Notice 2 +25°C GB at 230VAC
Weight		250 (0.551)		g (lb)	
Case material	Aluminium chassis with vented galvanized steel cover				

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Operating temperature	-30		+70	°C	See derating curve
Storage temperature	-40		+85	°C	
Cooling	Natural convection				
Humidity	20		95	%RH	Non-condensing
Operating altitude			2000	m	
Vibration	Tested according to EN60068-2-27, 10-500Hz, 5g (1H) for each X, Y and Z plane				

EMC: emissions

Phenomenon	Standard	Test level	Notes & conditions
Conducted	EN55032	Class B	
Radiated	EN55032	Class B	
Harmonic currents	EN61000-3-2	Class A	Load ≥80%
Voltage flicker	EN61000-3-3		

EMC: immunity


Phenomenon	Standard	Test level	Criteria	Notes & conditions
ESD immunity	EN61000-4-2	2/3	B	Contact ±4kV / Air ±8kV
Radiated immunity	EN61000-4-3	10V/m	B	
EFT	EN61000-4-4	±2kV	B	
Surge	EN61000-4-5	Installation class 3	B	Line to line ±1kV, line to ground ±2kV
Conducted	EN61000-4-6	10Vrms	A	
Magnetic field	EN61000-4-8	30A/m	A	
Dips and interruptions	EN61000-4-11 (230VAC)	Dip. 100% (0VAC), 10ms	B	
		Dip. 30% (154VAC), 500ms	B	
		Dip. 20% (176VAC), 5000ms	B	
Interruptions	EN61000-4-11	Int. 100% (0VAC), 5000ms	C	

Safety approvals

Certification	Standard	Notes & conditions
CB	IEC62368-1	Information technology
UL	UL62368-1	Information technology
TUV	EN62368-1	Information technology
CCC	China Compulsory Certification, GB4943, GB17625.1, GB4943.1, GB/T9254	Information technology
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	


Application notes

Temperature derating

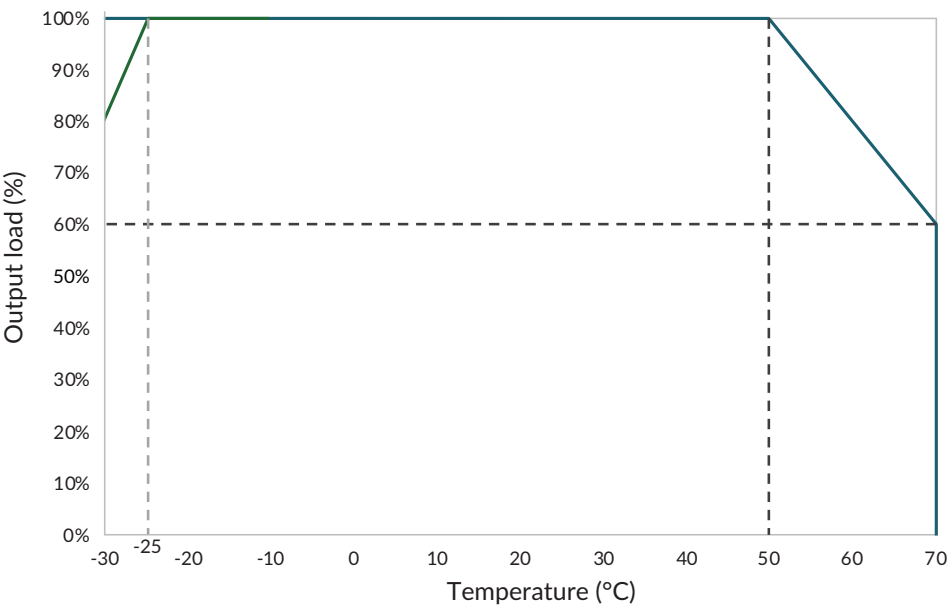



Mechanical details

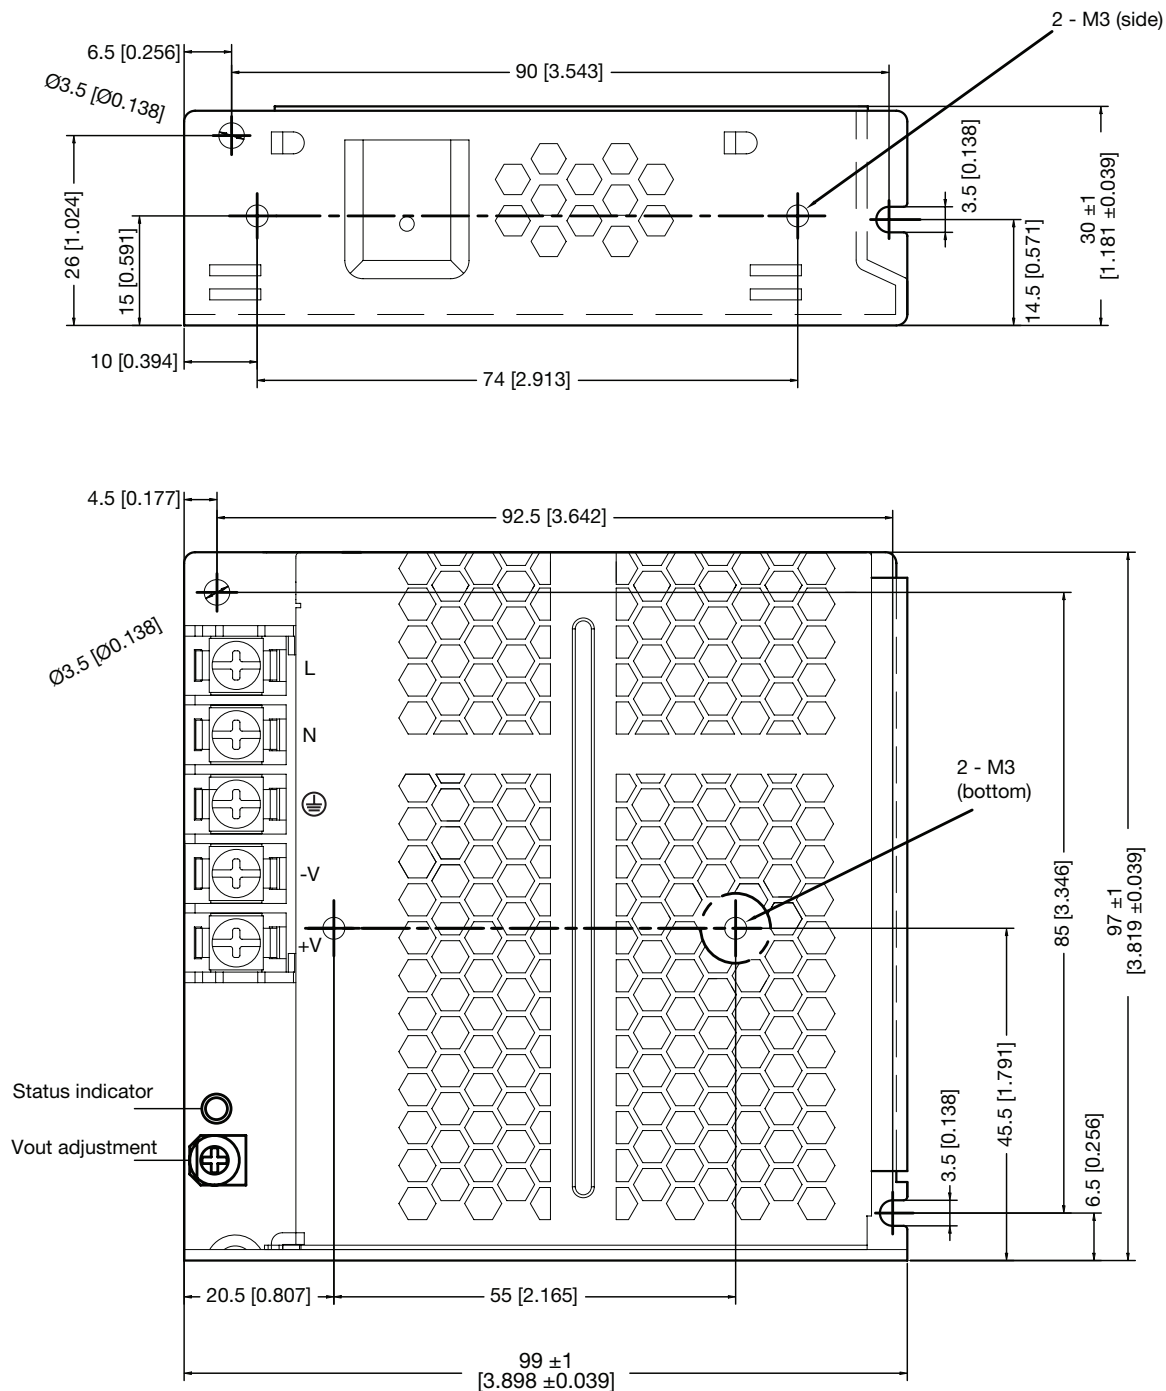

Notes:

1. All dimensions are in mm (inches).
2. Terminal screw tightening torque: M4 12N-m (1.2Kgf-cm)
3. Mounting screw tightening torque: M3 0.4N-m (4Kgf-cm)
4. Mounting screw penetration depth: 3mm max
5. Mounting screw length : 5mm
6. Chassis must be connected to protective earth