


Automotive 600 V, 60 A ultrafast high voltage rectifier



HU3PAK



Product status link

[STTH60RQ06L2Y](#)

Product summary

$I_{F(AV)}$	60 A
V_{RRM}	600 V
V_F (typ.)	1.45 V
t_{rr} (max.)	35 ns
T_j	-40 °C to +175 °C

Features

- AEC-Q101 qualified 
- High junction temperature capability
- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduce switching and conduction losses
- PPAP capable

Applications

- On board charger (OBC)
- Secondary LLC rectification
- DC/DC converters
- EV Charging station

Description

Housed in a HU³PAK package, this 600 V, 60 A device uses ST 600 V rapid quiet (RQ) diode technology.

[STTH60RQ06L2Y](#) is ideal for automotive application use as secondary rectification diode.

1 Characteristics

Table 1. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

Symbol	Parameter		Value	Unit
V_{RRM}	Repetitive peak reverse voltage	$T_j = -40\text{ °C to }+175\text{ °C}$	600	V
$I_{F(RMS)}$	Forward rms current		90	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$, square wave	$T_C = 125\text{ °C}$	60	A
I_{FSM}	Surge non repetitive forward current	$t_p = 10\text{ ms sinusoidal}$	340	A
T_{stg}	Storage temperature range		-65 to +175	°C
T_j	Operating junction temperature range		-40 to +175	°C

Table 2. Thermal resistance parameters

Symbol	Parameter	Max. value	Unit
$R_{th(j-c)}$	Junction to case	0.32	°C/W

For more information, refer to the following technical note:

- [TN1378](#): HU³PAK package mounting and thermal behaviour
- [AN5088](#): Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	$V_R = 600\text{ V}$	-		80	μA
		$T_j = 150\text{ °C}$		-	160	1600	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	$I_F = 60\text{ A}$	-		2.95	V
		$T_j = 150\text{ °C}$		-	1.45	1.85	

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 1.05 \times I_{F(AV)} + 0.013 \times I_F^2 (RMS)$$


For more information, refer to the following application notes related to the power losses :

- [AN604](#): Calculation of conduction losses in a power rectifier
- [AN4021](#): Calculation of reverse losses on a power diode

Table 4. Dynamic electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$T_j = 25\text{ °C}$	$I_F = 0.5\text{ A}$, $I_{rr} = 0.25\text{ A}$, $I_R = 1\text{ A}$	-		35	ns
			$I_F = 1\text{ A}$, $V_R = 30\text{ V}$, $dI_F/dt = -50\text{ A}/\mu\text{s}$	-	50	65	
I_{RM}	Reverse recovery current	$T_j = 125\text{ °C}$	$I_F = 60\text{ A}$, $V_R = 400\text{ V}$, $dI_F/dt = -200\text{ A}/\mu\text{s}$	-	12	16	A
Q_{rr}	Reverse recovery charge			-	660		nC
t_{rr}	Reverse recovery time			-	92		ns

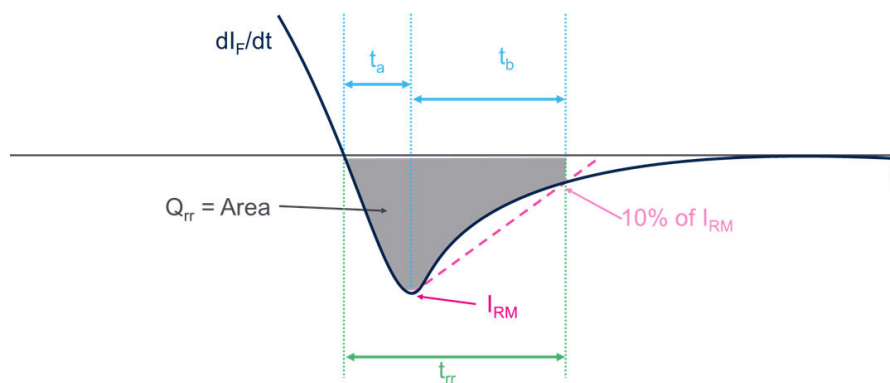Figure 1.



For more information, refer to the following application notes related to the power losses:

- [AN5028](#): Calculation of turn-off power losses generated by an ultrafast diode

1.1 Characteristics (curves)

Figure 2. Average forward power dissipation versus average forward current (square waveform)

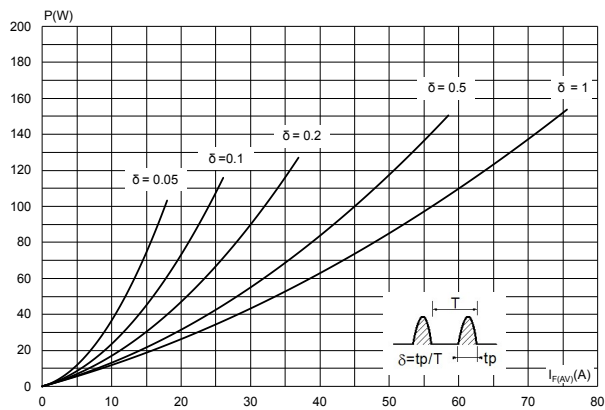


Figure 3. Average forward power dissipation versus average forward current (sinus waveform)

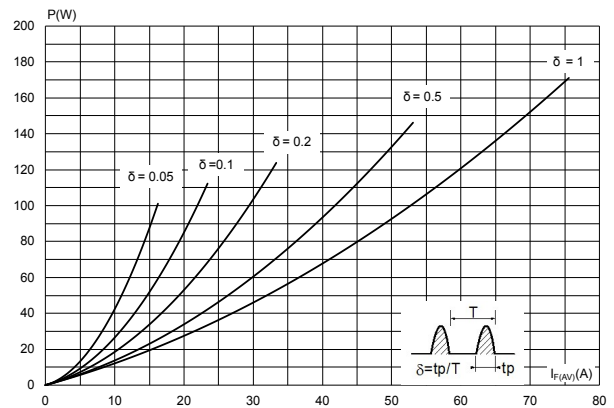


Figure 4. Forward voltage drop versus forward current (typical values)

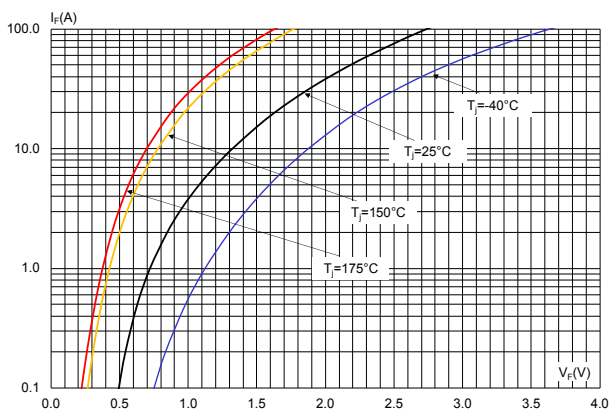


Figure 5. Forward voltage drop versus forward current (maximum values)

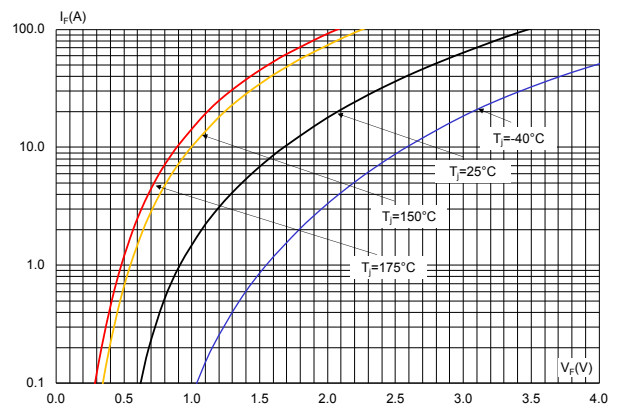


Figure 6. Relative variation of thermal impedance junction to case versus pulse duration

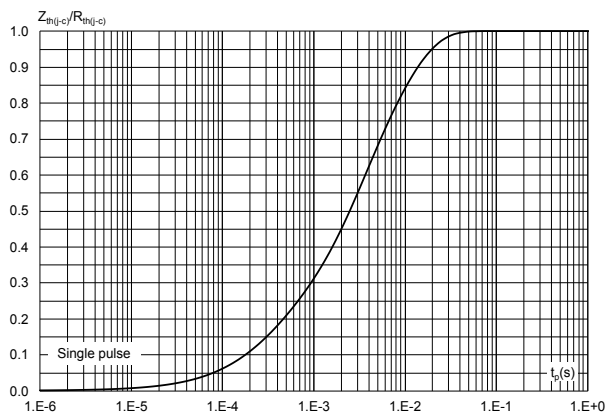


Figure 7. Peak reverse recovery current versus di_F/dt (typical values)

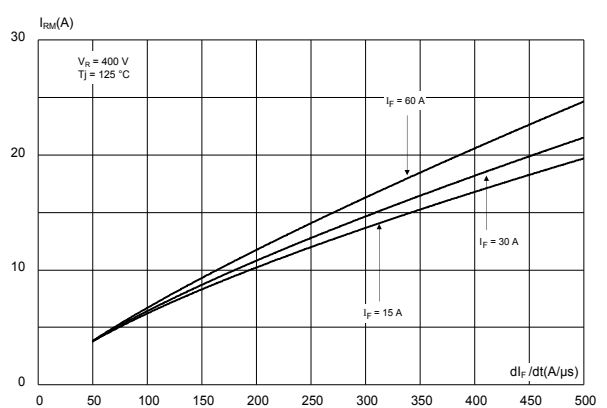


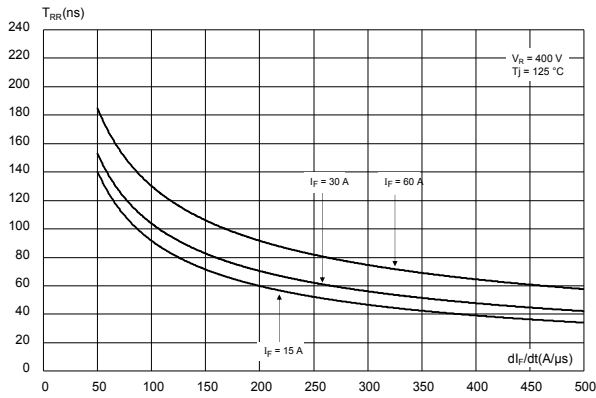
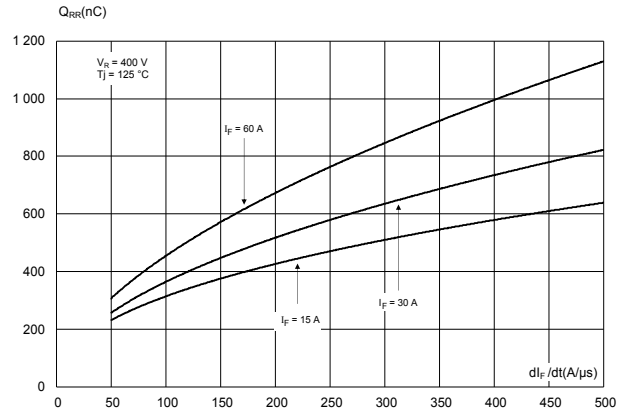
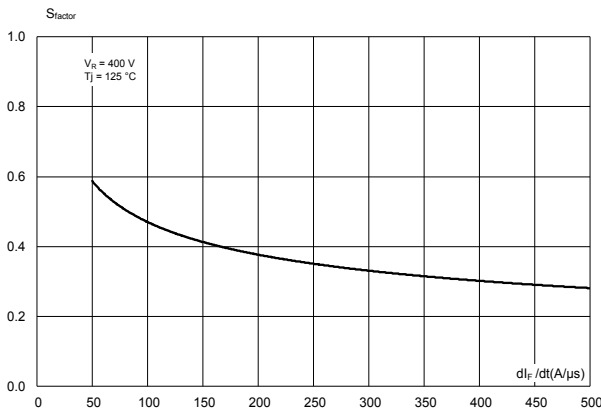
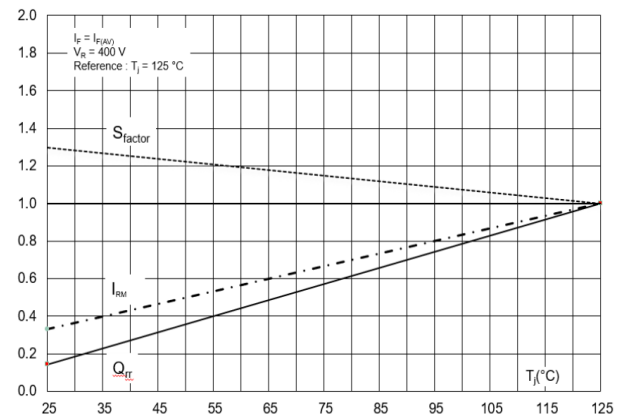
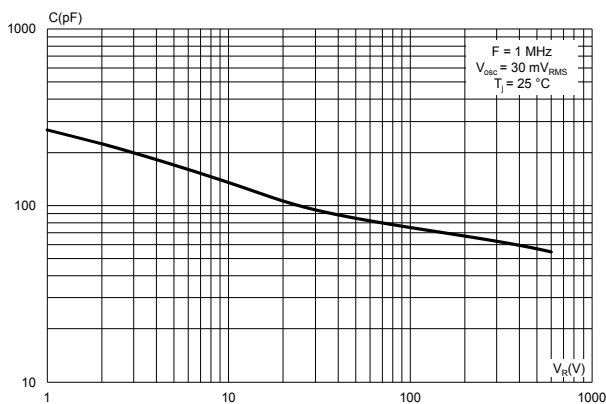
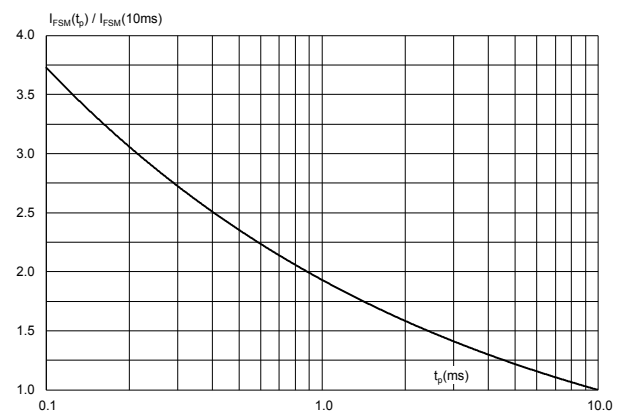
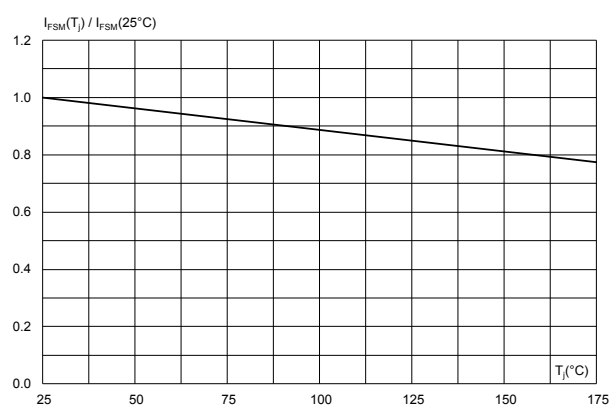
Figure 8. Reverse recovery time versus dl_F/dt (typical values)

Figure 9. Reverse recovery charges versus dl_F/dt (typical values)

Figure 10. Reverse recovery softness factor versus dl_F/dt (typical values)

Figure 11. Relative variation of dynamic parameters versus junction temperature

Figure 12. Junction capacitance versus reverse voltage applied (typical values)

Figure 13. Relative variation of non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform)


Figure 14. Relative variation of non-repetitive peak surge forward current versus initial junction temperature (sinusoidal waveform)




2 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 HU3PAK package information

- Epoxy meets UL94, V0

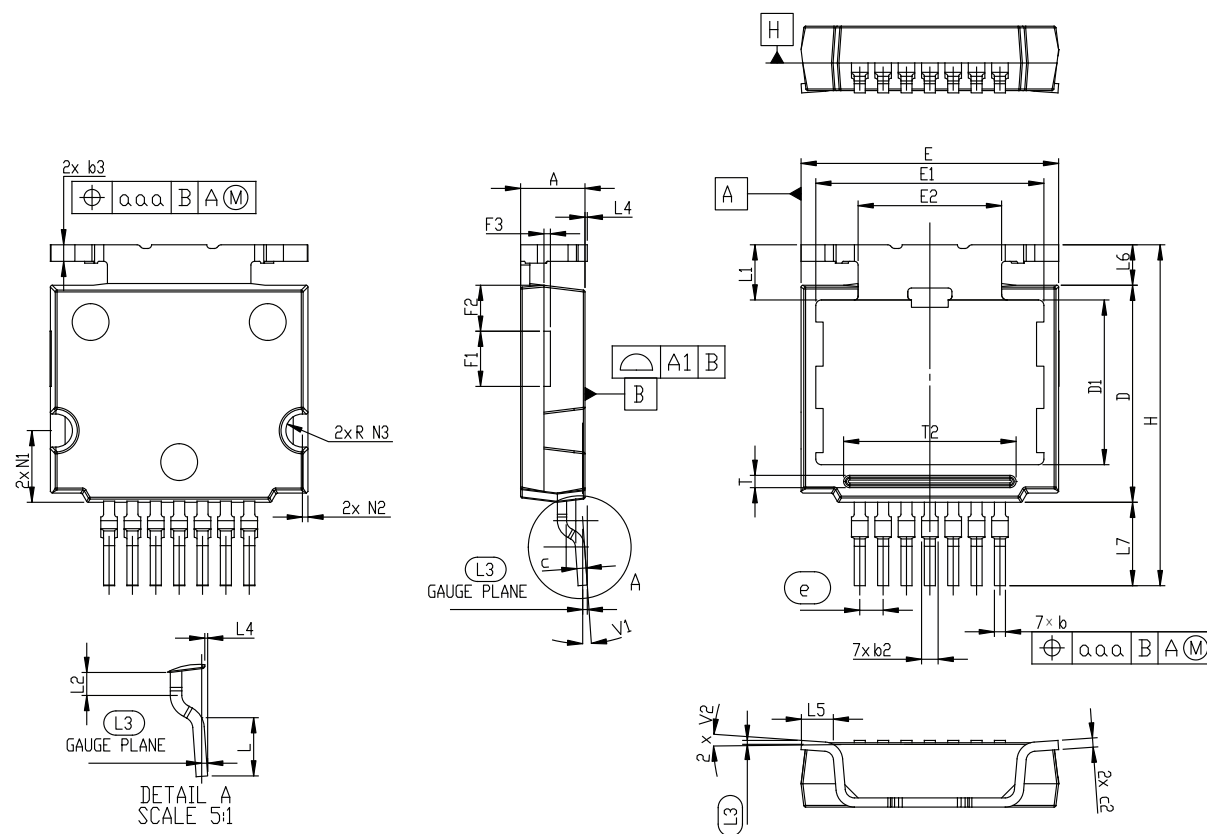Figure 15. HU3PAK package outline



DM00674007_2


Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 5. HU3PAK package mechanical data

Ref.	Dimensions		
	mm		
	Min.	Typ.	Max.
A	3.40	3.50	3.60
A1		0.05	
b	0.50	0.60	0.70
b2	0.50	0.70	1.00
b3	0.80	0.90	1.00
c	0.40	0.50	0.60
c2	0.40	0.50	0.60
D	11.70	11.80	11.90
D1	8.80	8.955	9.10
E	13.90	14.00	14.10
E1	12.30	12.40	12.50
E2	7.75	7.80	7.85
e	BSC 1.27		
H	18.00	18.58	19.00
L	2.40	2.52	2.60
L1		3.05	
L2	0.90	1.00	1.10
L3	BSC 0.26		
L4	0.075	0.125	0.175
L5	1.83	1.93	2.03
L6	2.14	2.24	2.34
L7	4.44	4.54	4.64
aaa		0.10	
F1	2.90	3.00	3.10
F2	2.40	2.50	2.60
F3	0.25	0.35	0.45
N1	3.80	3.90	4.00
N2	0.25	0.30	0.45
N3	0.80	0.90	1.00
T	0.50	0.67	0.70
T2	9.18	9.38	9.43
θ1		0°	8°
θ2		0°	8°

1. Package outline exclusive of any mold flashes dimensions.
2. Package outline exclusive of burr dimensions.
3. Max resin gate protrusion: 0.25 mm.
4. The planarity of the package backside 50 micron max.
5. BSC: basic spacing between centers

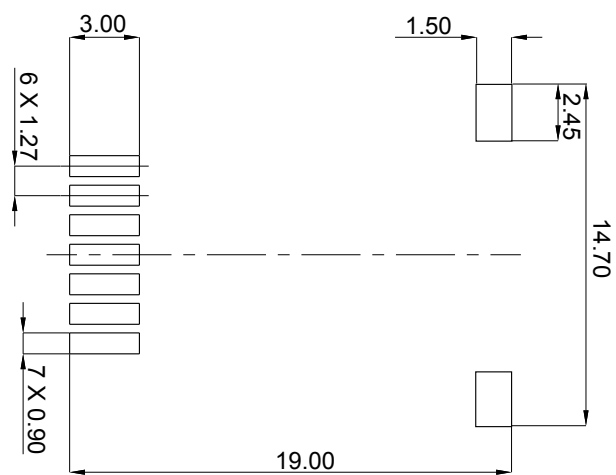Figure 16. HU3PAK recommended footprint (dimensions are in mm)



DM00674007_2

Note: For packing details you can see technical note [TN1173: Packing information for IPAD, protection, rectifiers, thyristors and AC Switches](#).

3 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH60RQ06L2Y	YTH60RQ06L2	HU ³ PAK	2.32 g	600	Tape and reel

Revision history

Table 7. Document revision history

Date	Revision	Changes
20-Nov-2025	1	Initial release.

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved