

SK 28 - Shield connection terminal block

3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Shield connection clamp, for shield on busbars, contact resistance < 1 mΩ



Your advantages

- Easy handling
- Spring-loaded, large-surface pressure plate
- Suitable for direct and busbar mounting
- Knurled screw
- As components, it is not possible to certify shield connections in accordance with the requirements of the directive and standards for electrical equipment in potentially explosive areas. As such, shield connection clamps can be used in the Ex area even without an appropriate approval or marking.

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 3026997 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | BE7512 |
| Product key | BE7512 |
| GTIN | 4046356284318 |
| Weight per piece (including packing) | 41.44 g |
| Weight per piece (excluding packing) | 41.44 g |
| Customs tariff number | 85369010 |
| Country of origin | CN |

SK 28 - Shield connection terminal block



3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Technical data

Notes

General

| | |
|------|---|
| Note | The shield connection clamps must not be used for strain relief of cables/conductors. |
| | Do not use for protective conductor connection. |

Product properties

| | |
|-----------------------|-------------------------|
| Product type | Shield connection clamp |
| Pitch | 31 mm |
| Number of connections | 1 |
| Number of rows | 1 |

Electrical properties

| | |
|---|------------------|
| Maximum power dissipation for nominal condition | 0.77 W |
| Contact resistance | < 0.001 Ω |

Connection data

| | |
|-------------------|------------------|
| Grounding foot | Yes |
| Connection method | Screw connection |
| Screw thread | M4 |
| Tightening torque | ... 1 Nm |

Dimensions

| | |
|--------|---------|
| Width | 31 mm |
| Height | 20 mm |
| Depth | 93.5 mm |
| Pitch | 31 mm |

External dimensions

| | |
|------------------|----------------|
| Outside diameter | 5 mm ... 28 mm |
|------------------|----------------|

Material specifications

| | |
|----------|----------------|
| Color | silver-colored |
| Material | Steel |

Cable/line

| | |
|-------------------------|----------------|
| External cable diameter | 5 mm ... 28 mm |
|-------------------------|----------------|

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

SK 28 - Shield connection terminal block



3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Mechanical tests

Mechanical strength

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Environmental and real-life conditions

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Long life test category 1, class B, body mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$ |
| ASD level | 0.02g ² /Hz |
| Acceleration | 0.8g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 5g |
| Shock duration | 30 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Mounting

| | |
|---------------|----------------|
| Mounting type | Neutral busbar |
|---------------|----------------|


SK 28 - Shield connection terminal block

3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Drawings

Diagram

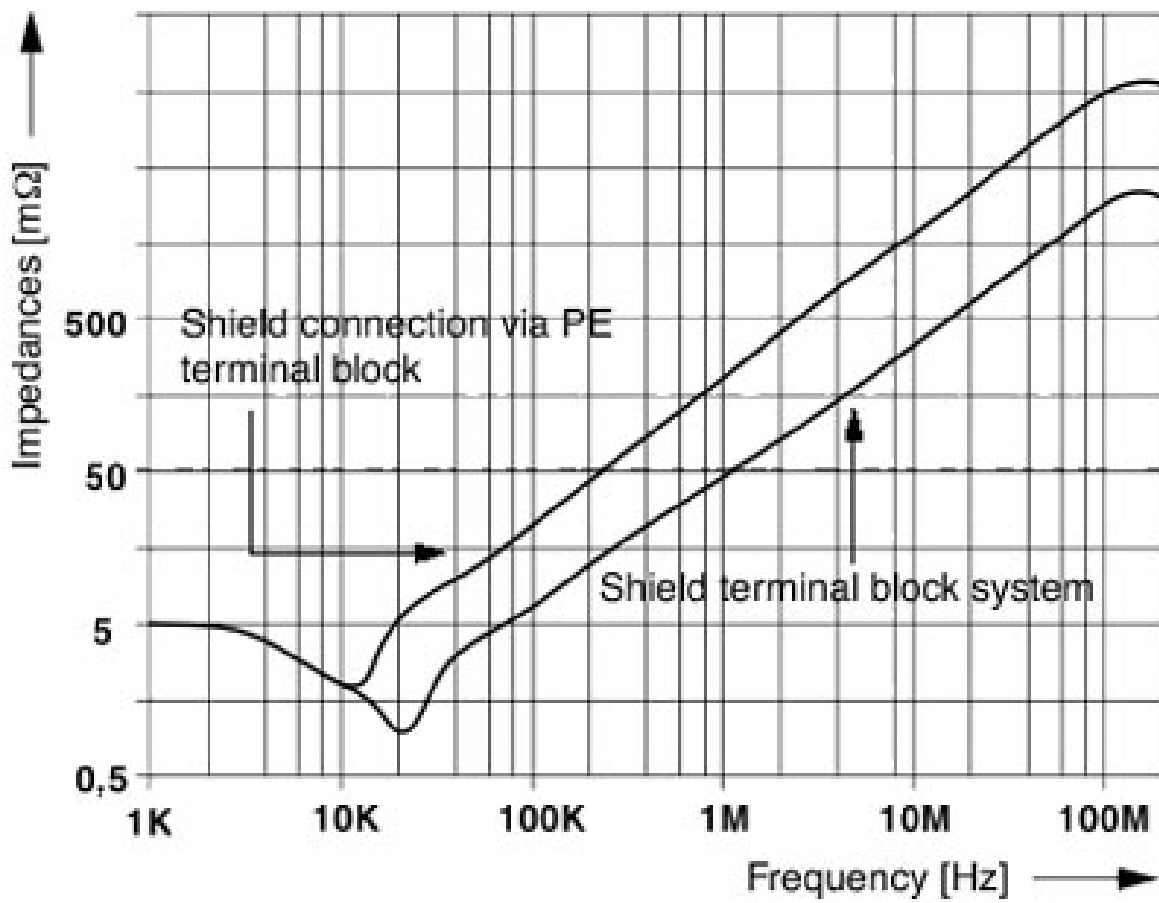

SK 28 - Shield connection terminal block



3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250309 |
| ECLASS-15.0 | 27250309 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002020 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

SK 28 - Shield connection terminal block



3026997

<https://www.phoenixcontact.com/gb/products/3026997>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk