

## OT 130/220...240/24 P

CV Power supplies 24 V



### Product family features

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30...+55 °C
- Lifetime: up to 50,000 h (temperature at max.  $t_c$ )

### Product family benefits

- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electronical reversible short-circuit, overload, overtemperature protection
- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible

### Areas of application


- Facades, public squares, cruise ships
- Signage
- Suitable for indoor and outdoor installations

Technical data

Electrical data

|                                      |             |
|--------------------------------------|-------------|
| Nominal output power                 | 130 W       |
| Mains frequency                      | 0...60 Hz   |
| Nominal voltage                      | 220...240 V |
| Device power loss                    | 14.7 W      |
| Power factor $\lambda$               | 0.95        |
| Inrush current                       | 60 A        |
| Galvanic isolation primary/secondary | 3 kV        |
| Nominal output voltage               | 24.2 V      |
| Input voltage DC                     | 176...250 V |
| Input voltage AC                     | 198...264 V |

Dimensions & weight

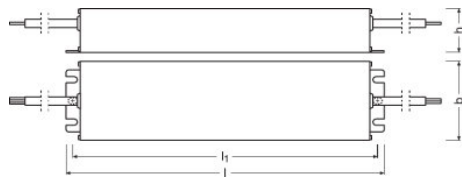

|                               |          |
|-------------------------------|----------|
| Length                        | 220.0 mm |
| Width                         | 63.0 mm  |
| Height                        | 37.0 mm  |
| Mounting hole spacing, length | 207.0 mm |
| Product weight                | 943.00 g |

Temperatures & operating conditions

|                                          |                        |
|------------------------------------------|------------------------|
| Ambient temperature range                | -30...+55 °C           |
| Permitted rel. humidity during operation | 5...85 % <sup>1)</sup> |

<sup>1)</sup> Maximum 56 days/year at 85 %

Capabilities

|                                        |     |
|----------------------------------------|-----|
| Suitable for fixtures with prot. class | I   |
| Overheating protection                 | Yes |

## Product datasheet

|                          |     |
|--------------------------|-----|
| Overload protection      | Yes |
| Short-circuit protection | Yes |
| No-load proof            | Yes |
| Dimmable                 | No  |
| Number of channels       | 1   |

### Certificates & standards

|                           |                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of protection        | IP66/IP67                                                                                                                                                |
| Standards                 | Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 61000-3-3/Acc. to EN 60598-1/Acc. to EN 62384 |
| Approval marks – approval | ENEC / RCM / CCC / EAC / CE                                                                                                                              |

### Logistical data

|                |              |
|----------------|--------------|
| Commodity code | 850440829000 |
|----------------|--------------|

---

### Download Data

| File                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  User instruction<br>OPTOTRONIC LED Power Supply                                 |
|  Product Datasheet<br>Datasheet OT 130220-24024 P                                |
|  Brochures<br>OPTOTRONIC constant-voltage LED power supplies and controls (EN)   |
|  Certificates<br>CCC Certificate No. 2018011002043871                            |
|  Certificates<br>CB Test Certificate No. SG PSB-LE-00906                         |
|  Certificates<br>ENEC Certificate No. U6 18 01 84117 048                         |
|  Declarations of conformity<br>EU Declaration of Conformity 3537796              |
|  Declarations of conformity<br>Attestation of Conformity No. N8A 18 01 84117 054 |
|  Declarations of conformity<br>Attestation of Conformity No. E8A 18 01 84117 049 |
|  Declarations of conformity<br>EU Declaration of Conformity OT 24V P_DIMP        |

## Product datasheet

---

### Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

### Logistical Data

| Product code  | Product description   | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume                | Gross weight |
|---------------|-----------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899546004 | OT 130/220...240/24 P | Shipping carton box<br>10    | 439 mm x 299 mm x 126 mm             | 16.54 dm <sup>3</sup> | 10590.00 g   |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.