


Data Sheet

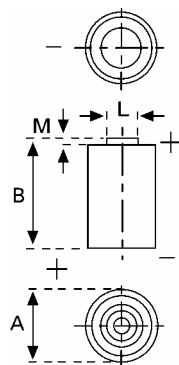

Type Number 6215
Designation IEC CR 17345
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH13654.(N)
Nominal Voltage 3 V
Typical Capacity C 1500 mAh
 Load 200 Ohm, at 20°C down to 2 V

Weight (approx.) 16 g
Volume 7 ccm
Coding..... Date of Manufacturing Quarter / Year

Temperature Ranges
 Storage min max.
 -30°C 65 °C
 Discharge -20°C 65°C

Dimensions
 Diameter (A) min max.
 16 17
 Height (B) 32,4 33,9
 Shoulder Diameter[L]..... 6,1
 Shoulder Height [M]..... 1

Segment Electronic

Main Applications Photo
 Electronic Devices

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	200 Ω	Time:	108 h
		Capacity [mAh]:	1500
		Energy [mWh]:	4190

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst

Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!

Date of issue: 2004-12-15