

Type: **U-PKZ0(415V50HZ)**


Article No.: **073139**



Ordering information

Actuating voltage			415 V 50Hz
For use with			PKZM0 PKZM4 auf Anfrage PKZM0-T PKM0

Contact sequence

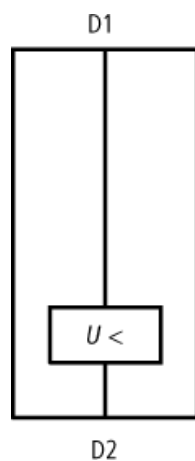


General

Terminal capacities			
Solid or flexible conductor with ferrule		mm ²	1 × (0.75 – 2.5) 2 × (0.75 – 2.5)
Solid or stranded		AWG	

			1 × (18 – 14)
			2 × (18 – 14)
Main conducting paths			
Rated operating voltage	U_e	V AC	42 – 480
Rated operating voltage	U_e	V DC	24 – 250
Power consumption			
AC			
Pick-up AC	Pick-up	VA	5
Sealing AC	Sealing	VA	3
Pick-up-/drop-out voltage			
Pick-up voltage			
Pick-up voltage, min.		$\times U_s$	0,85
Pick-up voltage, max.		$\times U_s$	1,1
Drop-out voltage			
Drop-out voltage, min.		$\times U_s$	0,7
Drop-out voltage, max.		$\times U_s$	0,35
Dimensions			

Dimensions

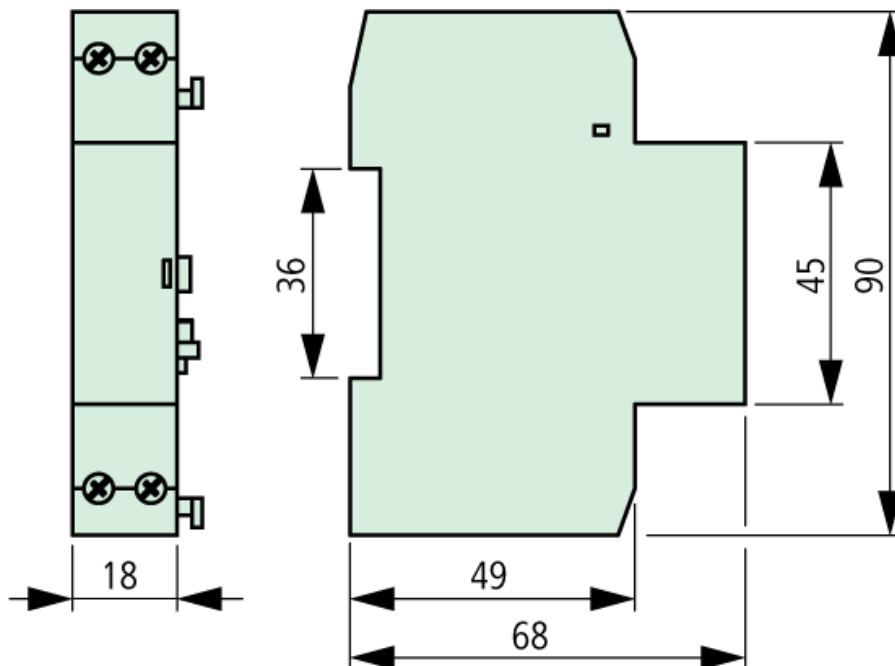

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3