

Thermal Cut-Out Thermostat Manual Reset

multicompPRO

**RoHS
Compliant**



Description

These temperature switches are very reliable bimetal technology components, offering a long life time. The normally closed contacts open when reaching the predefined temperature by snapping of a bimetal disc. Temperature setting is defined through conditioning of the disc. After a corresponding cooling down, the bimetal disc snaps back to the original position and closes the current circuit again or remains in open position until manually resettled. These types are perfect surface mount components, offering high temperature sensibility and can be used in a wide range of white goods, automotive technology, mechanical engineering, kitchen devices.

Specifications

Technical data	Values
Function	Manual Reset
Version	Normally Closed
(VDE) Rated current at 250 V AC (cos φ 0,95)	16A
(VDE) Switching Cycles	3,000
(VDE) Temperature Range TA (steps in 5 K)	150°C Max.
(UL) Rated current 240V AC (cos φ 1,0)	10A
(UL) Switching cycles	6,000
(UL) Temperature Range TA (steps in 5K)	+40°C to +150°C
Tolerance	TA<100°C: ± 4 K / TA >100°C: ± 5 K / TA>150°C: ± 8 K / TA >200°C: ± 10 K
Contact Resistance	<30m Ω
Degree of protection of enclosure (EN 60529)	IP00 (60EN IP64)
Dielectric strength	AC 1,500 V/1min. oder AC 1,800 V/1 sec.
Suitable for use in protection class	I, II

Standard Types

Type	n.c. Normally Closed = 1	n.o. Normally Open = 3	Code	Illustration	Drawing Dimensions (mm)	Technical Description
05EN	1	-	Manual, Reset Pin, Housing Thermosetting Plastic			Terminals 6.3 x 0.8, Small, Loose Bracket, Aluminium Cap, Reset Pin

Code	Illustration	Drawing Dimensions (mm)	Technical Description
4			Loose Bracket, Small


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Thermal Cut-Out Thermostat Manual Reset

multicompPRO

Structure

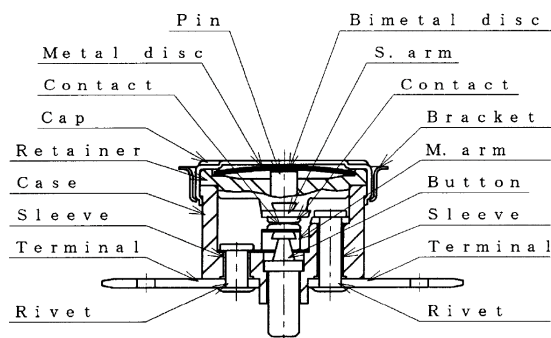

Materials of parts

Part	Material
Cap	Aluminium Copper Stainless Steel
Case	Phenolic Resin
M.arm	Beryllium Copper alloy
Terminal	Brass
Bracket	Stainless Steel
Contacts	Silver-Nickel alloy
Button	Phenol

Part Number Table

Description	Part Number
Thermal Switch, NC, 45°C	05EN1034(45/M)
Thermal Switch, NC, 65°C	05EN1034(65/M)
Thermal Switch, NC, 80°C	05EN1034(80/M)
Thermal Switch, NC, 90°C	05EN1034(90/M)
Thermal Switch, NC, 100°C	05EN1034(100/M)
Thermal Switch, NC, 115°C	05EN1034(115/M)
Thermal Switch, NC, 130°C	05EN1034(130/C)
Thermal Switch, NC, 150°C	05EN1034(150/C)

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO