



Four-Level Spring Cage Motor Terminal Block ST 2,5-PE/3L

The four-level terminal block ST 2,5-PE/3L is especially suited for the compact wiring of three-phase loads. It has three feed-through levels and one PE connection which makes contact by simply snapping onto the mounting rail.

Each terminal point can be labeled and features a testing option for 2.3 mm Ø test connectors. Large-surface labeling is also possible in the terminal center.

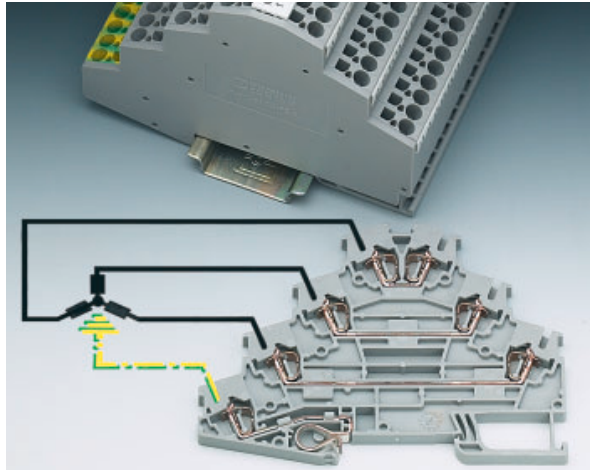

Four-Level Spring Cage Motor Terminal Block ST 2,5-PE/3L

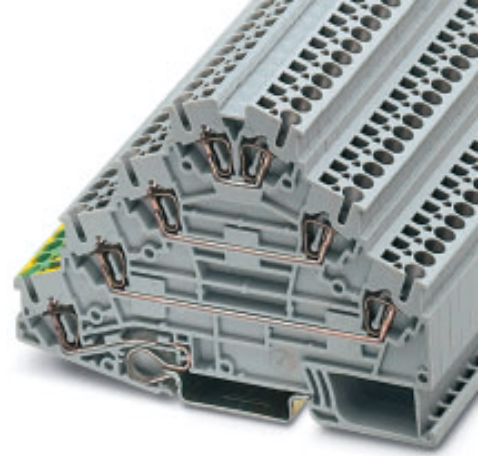

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
Connection data	0.08-4	0.08-2.5	28-12	26	800

Technical data

Spring cage terminal block, for mounting on 		gray	terminal width 5.2
(1) End cover	gray		
(2) 2.3 mm Ø test connector¹⁾ , consisting of metal part and red insulating sleeve			
(3) Screwdriver , for actuating the tension spring			
(4) Zack strip , flat, , for labeling the outer marker grooves	white		
(5) Zack strip , 10-section, for labeling in the terminal center	white		
Dimensions			
Width / length / end cover width		[mm]	
Height (NS 35/7.5 / NS 35/15)		[mm]	
Technical data in accordance with IEC/ DIN VDE			
Maximum load current / cross section		[A] / [mm ²]	
Rated surge voltage / contamination class		[kV] / –	
Surge voltage category / insulation material group		– / –	
Connection capacity			
Stranded with ferrule with plastic sleeve		[mm ²]	
Stranded with ferrule without plastic sleeve		[mm ²]	
Stranded with TWIN ferrule with plastic sleeve		[mm ²]	
Stripping length		[mm]	
Internal cylindrical gauge (IEC 60 947-1)			
Insulating material			
Inflammability class in acc. with UL 94			
Approval data (UL and CSA/CUL)			
Nom. voltage / nom. current / conduc. sizes		UL: [V] / [A] / AWG	
		CSA/CUL: [V] / [A] / AWG	

¹⁾ Further colors on request.

Type	Order No.	Pcs. Pkt.
ST 2,5-PE/3L	30 36 05 5	50
D-ST 2,5-PE/3L	30 36 67 3	50
MPS-RD	02 01 55 3	10
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 5:UNPRINTED	08 08 64 2	10
ZB 5:UNPRINTED	10 50 00 4	10
5.2 / 98.5 / 2.2		
73.5 / 81		
26 / 4		
8 / 3		
III / I		
0.25 - 2.5		
0.25 - 2.5		
–		
10		
A 3		
PA		
V0		
–		
–		

© PHOENIX CONTACT 01.04.03 TNR: 5125757-01 <http://www.phoenixcontact.com>