



Approved models, 

DIN mounting

JW1SI




JW2SI




PCB mounting

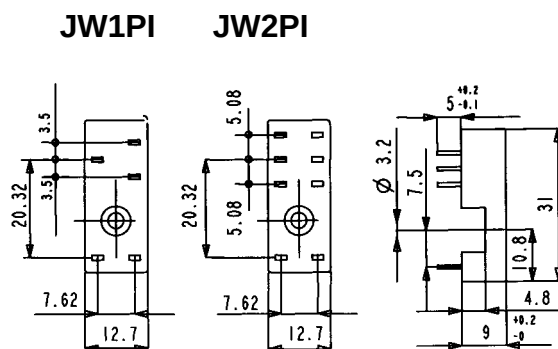
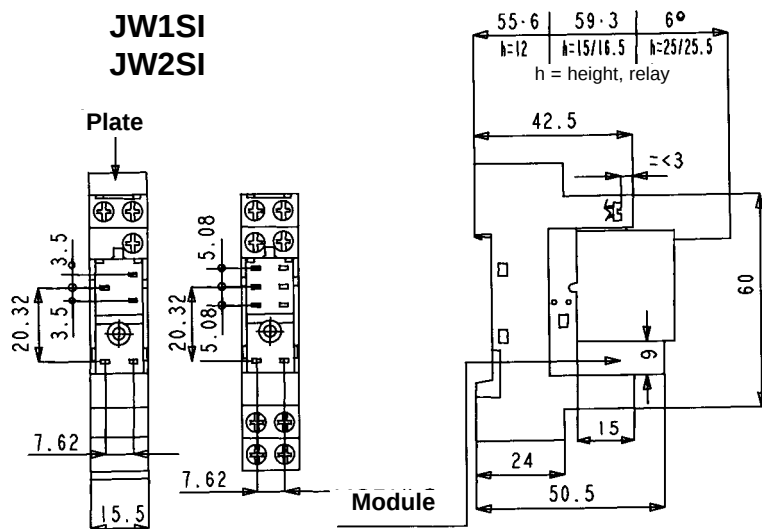
JW1PI



JW2PI



Dimensions



Accessories

Retaining spring, relay JWHFSI








H (height relay) = 20,4 mm

Retaining spring, relay JWHFI





H (height relay) = 20,4 mm

MODULES supporting the relays HJ / HC

	Description	Voltage	Schematic	LED color	Type
	Module with diode. Protection against inverting polarity.	5/230 V DC 6/230 V DC			1 2
	Module with diode and LED. Protection against inverting polarity plus illuminated signal.	6/24 V DC 24/60 V DC		LED red LED red	4 4 B
	Module "RC" series. Without signal. RC circuit.	5/24 V DC			5 B
	Module with signal LED. No protection against inverting polarity. AC or DC power supply possible.	5/24 V AC / DC 110/230 V AC / DC		LED red LED red	5 9

MODULES supporting the relay JW

	Description	Voltage	Schematic	LED color	Type
	Module with diode and LED. Protection against inverting polarity plus illuminated signal.	6/24 V DC 24/60 V DC		LED red LED red	42 42 B
	Module with signal LED. No protection against inverting polarity. AC or DC power supply possible.	6/24 V AC / DC 24/60 V AC / DC		LED red LED red	62 62 E