


Description:

TO-220 NPN silicon plastic transistor designed for use in high frequency drivers in audio amplifier applications

RoHS
Compliant



Features:

Collector Emitter Saturation Voltage, $V_{CE0} = 120V$

D.C.Current Gain Specified to 8 Amperes, $h_{FE} = 40$ min. @ $I_C = 3A$
 $h_{FE} = 20$ min. @ $I_C = 4A$

Absolute Maximum Ratings:

Characteristic	Symbol	Rating
Collector - Base Voltage	V_{CBO}	150V
Collector - Emitter Voltage	V_{CEO}	150V
Emitter - Base Voltage	V_{EBO}	5V
Continuous Collector Current	I_C	8A
Base Current	I_B	2A
Total Device Dissipation ($T_C = +25^{\circ}C$), Derate above $25^{\circ}C$	P_D	50W 0.4W/ $^{\circ}C$
Operating Junction Temperature Range	T_J	$-65^{\circ}C$ to $+150^{\circ}C$
Storage Temperature Range	T_{STG}	$-65^{\circ}C$ to $+150^{\circ}C$

Electrical Characteristics ($T_A = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
-----------	--------	-----------------	------	------	------

OFF Characteristics

Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	150	-	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 150V, I_E = 0$	-	10	μA
	I_{CEO}	$V_{CB} = 150V, I_B = 0$	-	0.1	mA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5V, I_C = 0$	-	10	μA

ON Characteristics

DC Current Gain, (Note 1)	h_{FE}	$V_{CE} = 2V, I_C = 0.1A$	40	-	-
		$V_{CE} = 2V, I_C = 2A$	40	-	-
		$V_{CE} = 2V, I_C = 3A$	40	-	-
		$V_{CE} = 2V, I_C = 4A$	20	-	-

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Collector - Emitter Saturation Voltage, Note 1	$V_{CE(sat)}$	$I_C = 1A, I_B = 0.1A$	-	0.5	V
Base - Emitter On Voltage, Note 1	$V_{BE(on)}$	$I_C = 1A, V_{CE} = 2V$	-	1	V

Small-Signal Characteristics (Note 2)

Current Gain - Bandwidth Product	f_T	$V_{CE} = 20V, I_C = 20mA, f = 100MHz$	30	-	MHz
----------------------------------	-------	--	----	---	-----

Note 1. Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$

Note 2. f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

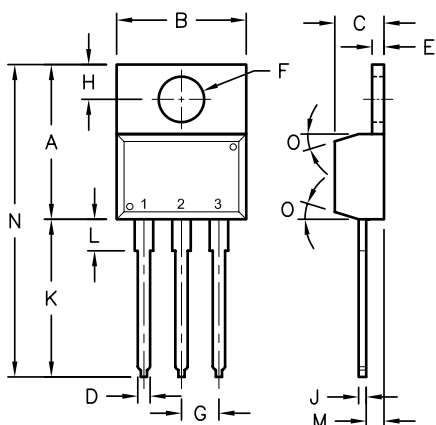

Pin Configuration:

1. Base
2. Collector
3. Emitter

Dim.	A	B	C	D	E	F	G	H	J	K	L	M	N	O
Min.	14.42	9.63	3.65	-	1.15	3.75	2.29	2.54	-	12.7	2.8	2.03	-	7°
Max.	16.51	10.67	4.83	0.9	1.4	3.88	2.79	3.43	0.56	14.73	4.07	2.92	31.24	

Dimensions : Millimetres

Part Number Table

Description	Part Number
Bipolar Transistor, NPN, 8A, 150V, TO-220	MJE15030

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.